
FLOOR AND CEILING LEVEL SCHEDULE

FLOOR LEVEL	FLOOR FINISH LEVEL	CEILING LEVEL	NOTE
LOWER ROOF LEVEL	106.550 FFL		
ENTRANCE 1 , 2 PODIUM LEVEL	102.550 FFL		
ENTRANCE 3 , 4 PODIUM LEVEL	102.550 FFL		
ROOF SLAB LEVEL	98.000 FFL		
MULTIPURPOSE LEVEL	92.170 FFL		
CONCOURSE LEVEL	86.410 FFL		
UPPER PLATFORM LEVEL	80.650 FFL		
TOP OF RAIL LEVEL (PLUP)	79.550 TOR		
LOWER PLATFORM LEVEL	72.350 FFL		
TOP OF RAIL LEVEL (PLLO)	71.250 TOR		

SETTING OUT COORDINATED POINTS		
GL. A-1	N= 1523967.7380	E= 663190.2675
GL. A-25	N= 1523711.8439	E= 663074.1675

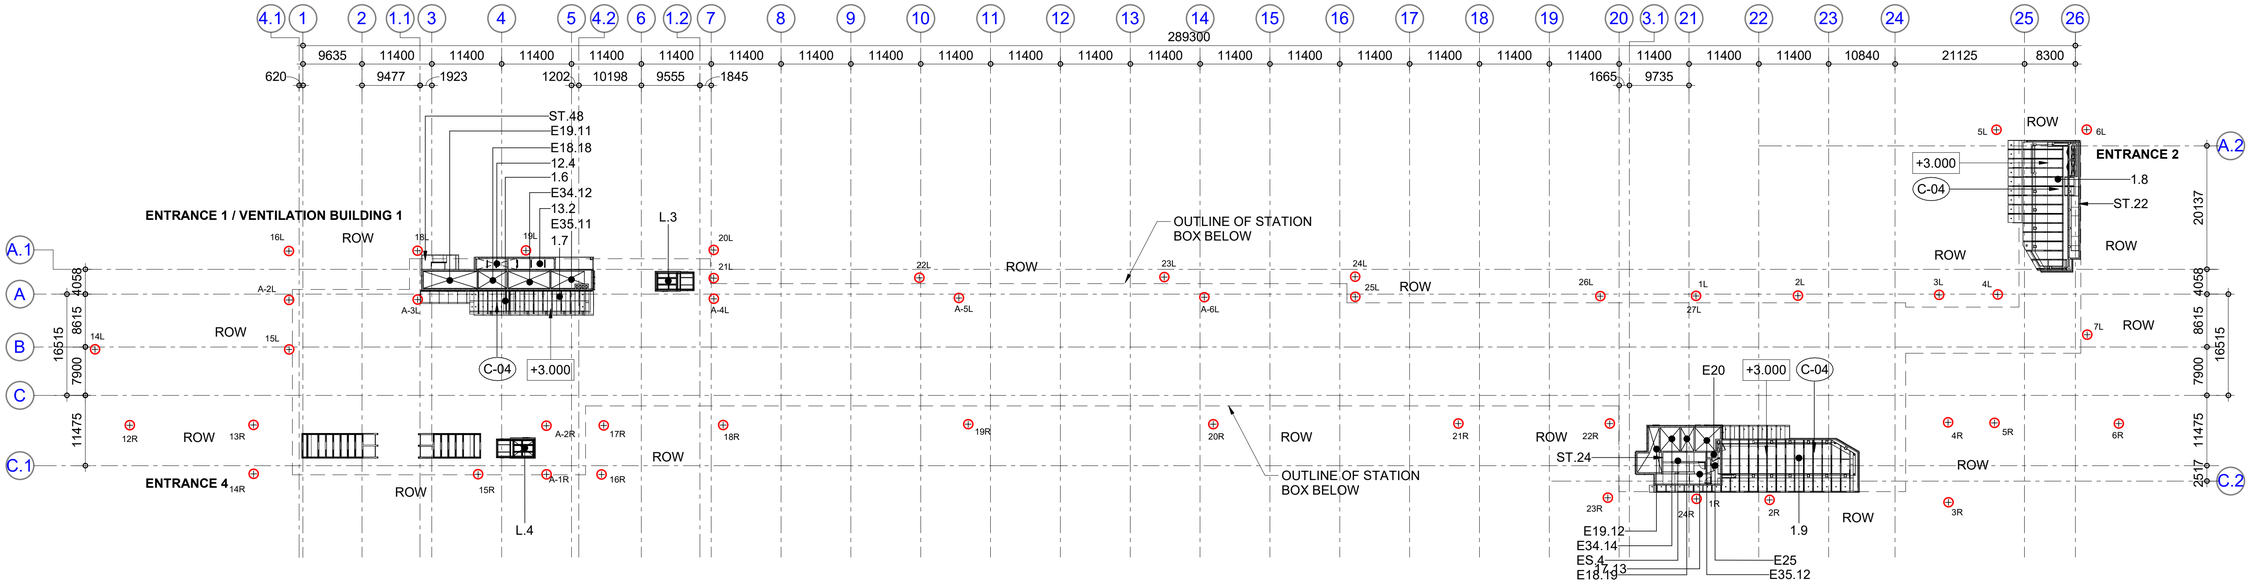

1 / -- GROUND LEVEL - REFLECTED CEILING PLAN

SCALE 1 : 500

NOTES :

1 ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2 LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3 DRAWING TO SCALE WHEN PLOTTED AT A1
4 DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5 ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E & M DRAWINGS , CONTRACT DOCUMENTS AND SPECIFICATIONS
6 FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7 FOR DRAINAGE DETAILS REFER DRAINAGE DRAWINGS
8 DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
9 DIMENSIONS SHOWN FROM DIAPHRAGM WALL ARE FROM LINE OF STRUCTURAL TOLERANCES AS INDICATED. DIMENSIONS SHOWN FROM EXTERNAL RC. WALL ARE NOMINAL AND DO NOT SHOWN FOR STRUCTURAL TOLERANCES. ALL SETTING OUT IS FROM GRIDLINES
10 FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
11 BLOCKWORK WALLS TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN

CEILINGS

C-00 NO CEILING, EXPOSED CONCRETE
C-01 NO CEILING, ACRYLIC INTERIOR PAINT
C-02 600X600 SOLID ALUMINIUM CEILING PANEL WITH POWDER COATING FINISH
C-03 600X600 PERFORATED ALUMINUM CEILING PANEL WITH POWDER COATING FINISH
C-04 300 MM. WIDTH PERFORATED ALUMINIUM CEILING WITH POWDER COATING FINISH (1.2MM THK. WITH ACOUSTIC NON-WOVEN BACKING MIN. 25% FREE AREA). USED AT ADIT AREA
C-05 300 MM. WIDTH PERFORATED ALUMINIUM CEILING WITH POWDER COATING FINISH (1.2MM THK. WITH ACOUSTIC NON-WOVEN BACKING MIN. 25% FREE AREA). USED AT PLATFORM AREA
C-06 SOLID ALUMINIUM COLOUR COATED CEILING PANEL 2MM. THK. USED IN BETWEEN COLUMN
C-07 1200 MM. WIDTH SOLID ALUMINIUM COLOUR COATED CEILING PANEL 2MM. THK.
C-08 300 MM. WIDTH PERFORATED ALUMINIUM COLOUR AND PRINTED PATTER COATED CEILING PANEL 1.2MM. THK WITH FOLDED ALUMINIUM SOLID PANEL ON THE SIDE
C-09 300 MM. WIDTH SOLID ALUMINIUM COLOUR COATED CEILING PANEL 1.2MM THK. CEILING PANEL 1.2MM. THK WITH FOLDED ALUMINIUM SOLID PANEL ON THE SIDE
C-10 CUSTOM DESIGN FEATURE CEILING : 300 MM. WIDTH SOLID ALUMINIUM COLOUR COATED CEILING PANEL 1.2MM THK. WITH PRINTED PATTERN AND FOLDED SOLID ALUMINIUM PANEL ON THE SIDE.
C-11 1500 MM. WIDTH SOLID ALUMINIUM COLOUR COATED CEILING PANEL 2MM. THK.

LEGENDS :

- DIA. 205 DOWNLIGHT
- 1257 x 90 LUMINAIRES
- 1257 x 120 LUMINAIRES
- 200 mm. Width SUPPLY AIR DIFFUSER
- 1200 x 600 RETURN AIR GRILLE
- SMOKE DETECTOR
- 300 WIDE COLOUR COATED METAL CEILING PANEL (LENGTH VARIES)
- SPRINKLER HEAD
- 600 X 600 SUPPLY AIR DIFFUSER

0 10 20 50 100M.
GRAPHIC SCALE 1:500

B

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
PMCSC1
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMCSC1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE
DESIGNER:
AECOM
TEAM Consulting Engineering and Management Co.,Ltd.
GFE The Geotechnical Expert
SEA-CONSULT ENGINEERING CO.,LTD.

			REV.	DATE	REVISIONS	DWG.	CHK.	APP.
DESIGNER		OYT						
DESIGN CHECKED		AJT	B	24-01-25	CRD UPDATED	LCC	OYT	AJT
PROJECT MANAGER		LCC	A	19-04-24	CRD	LCC	OYT	AJT

PURPLE LINE PROJECT
CONTRACT 1: UNDERGROUND CIVIL WORKS

SCALE : A1 = 1:500, A3 = 1:1000
UNITS : mm.
DATE : 19-04-2024

PP19 : VAJIRA HOSPITAL STATION
GROUND LEVEL - REFLECTED CEILING PLAN

STATUS :	DRAWING NO.	REVISION :	SHEET NO.
C	1-PP19-AR-4110-01	B	

1/24/2025 11:28:22 AM Autodesk Docs://Purple Line Extension/PRL-C-DPAR-1-PP19-AR-M3-0001.rvt