
FLOOR AND CEILING LEVEL SCHEDULE

FLOOR LEVEL	FLOOR FINISH LEVEL	CEILING LEVEL	NOTE
LOWER ROOF LEVEL	106.550 FFL		
ENTRANCE 1 , 2 PODIUM LEVEL	102.550 FFL		
ENTRANCE 3 , 4 PODIUM LEVEL	102.550 FFL		
ROOF SLAB LEVEL	98.000 FFL		
MULTIPURPOSE LEVEL	92.170 FFL		
CONCOURSE LEVEL	86.410 FFL		
UPPER PLATFORM LEVEL	80.650 FFL		
TOP OF RAIL LEVEL (PLUP)	79.550 TOR		
LOWER PLATFORM LEVEL	72.350 FFL		
TOP OF RAIL LEVEL (PLLO)	71.250 TOR		

SETTING OUT COORDINATED POINTS		
GL. A-1	N= 1523967.7380	E= 663190.2675
GL. A-25	N= 1523711.8439	E= 663074.1675

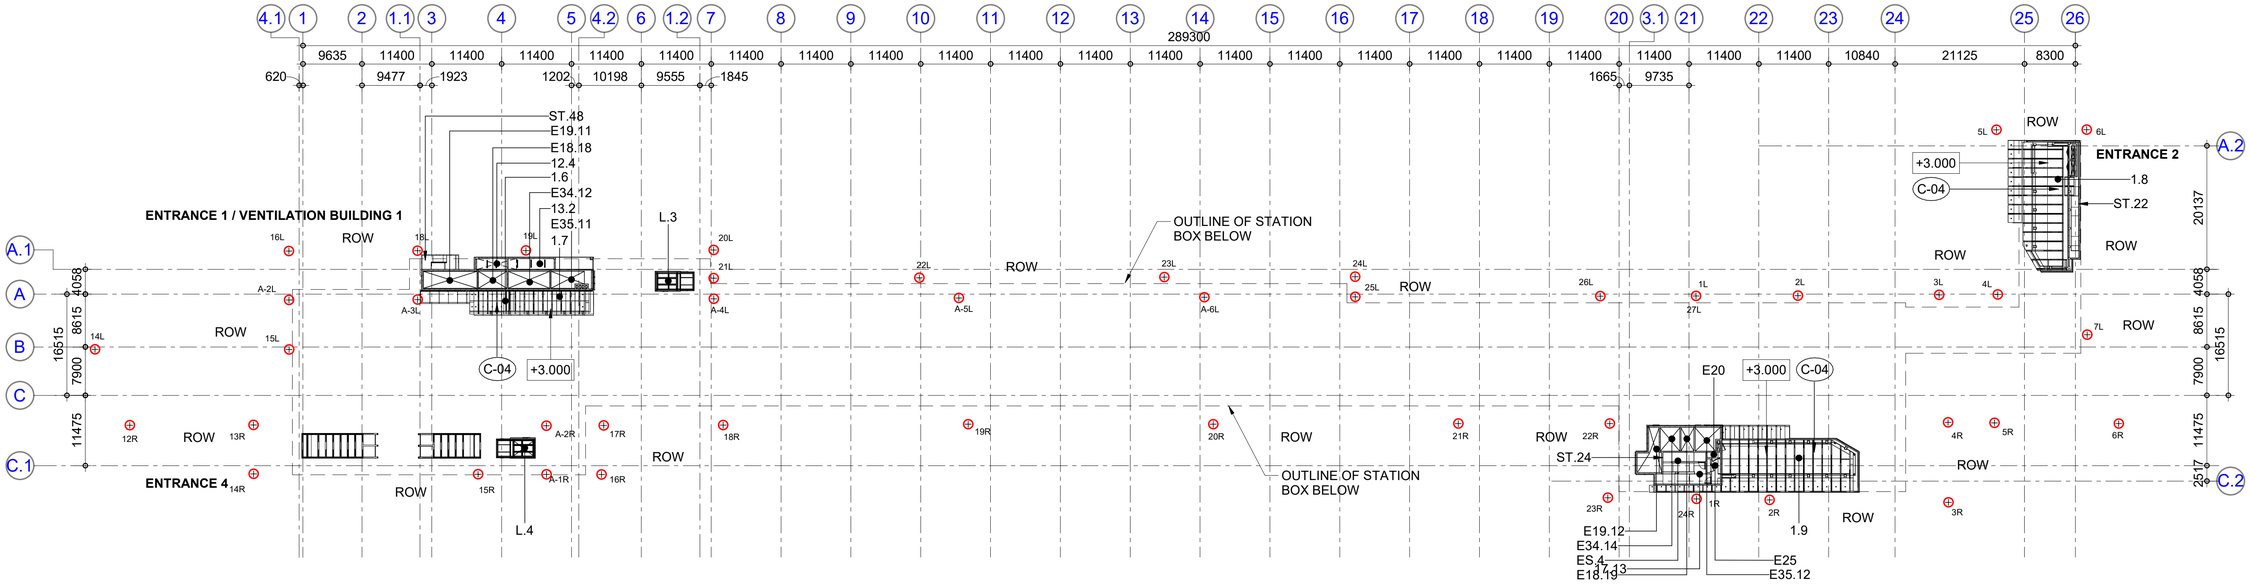

1 / -- GROUND LEVEL - REFLECTED CEILING PLAN

SCALE 1 : 500

NOTES :

1 ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2 LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3 DRAWING TO SCALE WHEN PLOTTED AT A1
4 DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5 ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E & M DRAWINGS , CONTRACT DOCUMENTS AND SPECIFICATIONS
6 FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7 FOR DRAINAGE DETAILS REFER DRAINAGE DRAWINGS
8 DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
9 DIMENSIONS SHOWN FROM DIAPHRAGM WALL ARE FROM LINE OF STRUCTURAL TOLERANCES AS INDICATED. DIMENSIONS SHOWN FROM EXTERNAL RC. WALL ARE NOMINAL AND DO NOT SHOWN FOR STRUCTURAL TOLERANCES. ALL SETTING OUT IS FROM GRIDLINES
10 FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
11 BLOCKWORK WALLS TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN

CEILINGS

C-00 NO CEILING, EXPOSED CONCRETE
C-01 NO CEILING, ACRYLIC INTERIOR PAINT
C-02 600X600 SOLID ALUMINIUM CEILING PANEL WITH POWDER COATING FINISH
C-03 600X600 PERFORATED ALUMINUM CEILING PANEL WITH POWDER COATING FINISH
C-04 300 MM. WIDTH PERFORATED ALUMINIUM CEILING WITH POWDER COATING FINISH (1.2MM THK. WITH ACOUSTIC NON-WOVEN BACKING MIN. 25% FREE AREA). USED AT ADIT AREA
C-05 300 MM. WIDTH PERFORATED ALUMINIUM CEILING WITH POWDER COATING FINISH (1.2MM THK. WITH ACOUSTIC NON-WOVEN BACKING MIN. 25% FREE AREA). USED AT PLATFORM AREA
C-06 SOLID ALUMINIUM COLOUR COATED CEILING PANEL 2MM. THK. USED IN BETWEEN COLUMN
C-07 1200 MM. WIDTH SOLID ALUMINIUM COLOUR COATED CEILING PANEL 2MM. THK.
C-08 300 MM. WIDTH PERFORATED ALUMINIUM COLOUR AND PRINTED PATTER COATED CEILING PANEL 1.2MM. THK WITH FOLDED ALUMINIUM SOLID PANEL ON THE SIDE
C-09 300 MM. WIDTH SOLID ALUMINIUM COLOUR COATED CEILING PANEL 1.2MM THK. CEILING PANEL 1.2MM. THK WITH FOLDED ALUMINIUM SOLID PANEL ON THE SIDE
C-10 CUSTOM DESIGN FEATURE CEILING : 300 MM. WIDTH SOLID ALUMINIUM COLOUR COATED CEILING PANEL 1.2MM THK. WITH PRINTED PATTERN AND FOLDED SOLID ALUMINIUM PANEL ON THE SIDE.
C-11 1500 MM. WIDTH SOLID ALUMINIUM COLOUR COATED CEILING PANEL 2MM. THK.

LEGENDS :

- DIA. 205 DOWNLIGHT
- 1257 x 90 LUMINAIRES
- 1257 x 120 LUMINAIRES
- 200 mm. Width SUPPLY AIR DIFFUSER
- 1200 x 600 RETURN AIR GRILLE
- SMOKE DETECTOR
- 300 WIDE COLOUR COATED METAL CEILING PANEL (LENGTH VARIES)
- SPRINKLER HEAD
- 600 X 600 SUPPLY AIR DIFFUSER

0 10 20 50 100M.
GRAPHIC SCALE 1:500

B

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
PMCSC1
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMCSC1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE
DESIGNER:
AECOM
TEAM Consulting Engineering and Management Co.,Ltd.
GFE The Geotechnical Expert
SEA-CONSULT ENGINEERING CO.,LTD.

			REV.	DATE	REVISIONS	DWG.	CHK.	APP.
DESIGNER		OYT						
DESIGN CHECKED		AJT	B	24-01-25	CRD UPDATED	LCC	OYT	AJT
PROJECT MANAGER		LCC	A	19-04-24	CRD	LCC	OYT	AJT

PURPLE LINE PROJECT
CONTRACT 1: UNDERGROUND CIVIL WORKS

SCALE : A1 = 1:500, A3 = 1:1000
UNITS : mm.
DATE : 19-04-2024


PP19 : VAJIRA HOSPITAL STATION
GROUND LEVEL - REFLECTED CEILING PLAN

STATUS :	DRAWING NO.	REVISION :	SHEET NO.
C	1-PP19-AR-4110-01	B	

1/24/2025 11:28:22 AM Autodesk Docs://Purple Line Extension/PRL-C-DPAR-1-PP19-AR-M3-0001.rvt

FLOOR AND CEILING LEVEL SCHEDULE

FLOOR LEVEL	FLOOR FINISH LEVEL	CEILING LEVEL	NOTE
LOWER ROOF LEVEL	106.550 FFL		
ENTRANCE 1 , 2 PODIUM LEVEL	102.550 FFL		
ENTRANCE 3 , 4 PODIUM LEVEL	102.550 FFL		
ROOF SLAB LEVEL	98.000 FFL		
MULTIPURPOSE LEVEL	92.170 FFL		
CONCOURSE LEVEL	86.410 FFL		
UPPER PLATFORM LEVEL	80.650 FFL		
TOP OF RAIL LEVEL (PLUP)	79.550 TOR		
LOWER PLATFORM LEVEL	72.350 FFL		
TOP OF RAIL LEVEL (PLLO)	71.250 TOR		

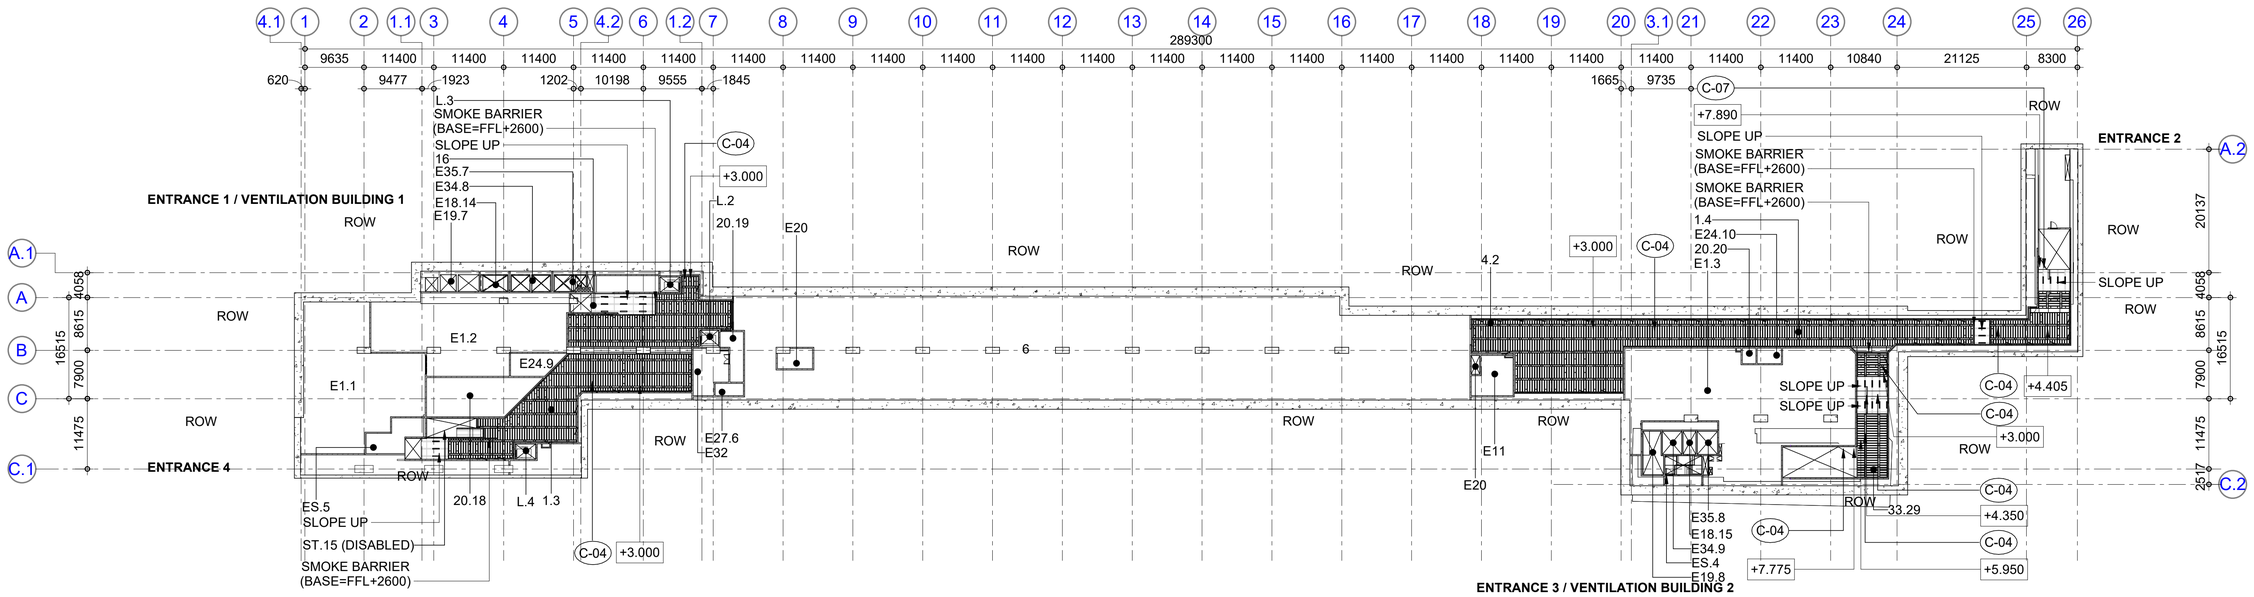

1 MULTI-PURPOSE LEVEL - REFLECTED CEILING PLAN

SCALE 1 : 500

NOTES :

1 ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2 LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3 DRAWING TO SCALE WHEN PLOTTED AT A1
4 DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5 ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E & M DRAWINGS , CONTRACT DOCUMENTS AND SPECIFICATIONS
6 FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7 FOR DRAINAGE DETAILS REFER DRAINAGE DRAWINGS
8 DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
9 DIMENSIONS SHOWN FROM DIAPHRAGM WALL ARE FROM LINE OF STRUCTURAL TOLERANCES AS INDICATED. DIMENSIONS SHOWN FROM EXTERNAL RC. WALL ARE NOMINAL AND DO NOT SHOWN FOR STRUCTURAL TOLERANCES. ALL SETTING OUT IS FROM GRIDLINES
10 FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
11 BLOCKWORK WALLS TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN

CEILINGS

C-00 NO CEILING, EXPOSED CONCRETE
C-01 NO CEILING, ACRYLIC INTERIOR PAINT
C-02 600X600 SOLID ALUMINIUM CEILING PANEL WITH POWDER COATING FINISH
C-03 600X600 PERFORATED ALUMINUM CEILING PANEL WITH POWDER COATING FINISH
C-04 300 MM. WIDTH PERFORATED ALUMINIUM CEILING WITH POWDER COATING FINISH (1.2MM THK. WITH ACOUSTIC NON-WOVEN BACKING MIN. 25% FREE AREA). USED AT ADIT AREA
C-05 300 MM. WIDTH PERFORATED ALUMINIUM CEILING WITH POWDER COATING FINISH (1.2MM THK. WITH ACOUSTIC NON-WOVEN BACKING MIN. 25% FREE AREA). USED AT PLATFORM AREA
C-06 SOLID ALUMINIUM COLOUR COATED CEILING PANEL 2MM. THK. USED IN BETWEEN COLUMN
C-07 1200 MM. WIDTH SOLID ALUMINIUM COLOUR COATED CEILING PANEL 2MM. THK.
C-08 300 MM. WIDTH PERFORATED ALUMINIUM COLOUR AND PRINTED PATTER COATED CEILING PANEL 1.2MM. THK WITH FOLDED ALUMINIUM SOLID PANEL ON THE SIDE
C-09 300 MM. WIDTH SOLID ALUMINIUM COLOUR COATED CEILING PANEL 1.2MM THK. CEILING PANEL 1.2MM. THK WITH FOLDED ALUMINIUM SOLID PANEL ON THE SIDE
C-10 CUSTOM DESIGN FEATURE CEILING : 300 MM. WIDTH SOLID ALUMINIUM COLOUR COATED CEILING PANEL 1.2MM THK. WITH PRINTED PATTERN AND FOLDED SOLID ALUMINIUM PANEL ON THE SIDE.
C-11 1500 MM. WIDTH SOLID ALUMINIUM COLOUR COATED CEILING PANEL 2MM. THK.

LEGENDS :

- DIA. 205 DOWNLIGHT
- 1257 x 90 LUMINAIRES
- 1257 x 120 LUMINAIRES
- 200 mm. Width SUPPLY AIR DIFFUSER
- 1200 x 600 RETURN AIR GRILLE
- SMOKE DETECTOR
- 300 WIDE COLOUR COATED METAL CEILING PANEL (LENGTH VARIES)
- SPRINKLER HEAD
- 600 X 600 SUPPLY AIR DIFFUSER

0 10 20 50 100M:
GRAPHIC SCALE 1:500

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
PMCSC1
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMSCS1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE
STECON
DESIGNER:
AECOM
TEAM Consulting Engineering and Management Co.,Ltd.
GFE The Geotechnical Expert

			REV.	DATE	REVISIONS	DWG.	CHK.	APP.
DESIGNER		OYT						
DESIGN CHECKED		AJT	B	24-01-25	CRD UPDATED	LCC	OYT	AJT
PROJECT MANAGER		LCC	A	19-04-24	CRD	LCC	OYT	AJT

PURPLE LINE PROJECT
CONTRACT 1: UNDERGROUND CIVIL WORKS

SCALE : A1 = 1:500, A3 = 1:1000
UNITS : mm.
DATE : 19-04-2024


PP19 : VAJIRA HOSPITAL STATION
MULTI-PURPOSE LEVEL - REFLECTED CEILING PLAN

STATUS :	DRAWING NO.	REVISION :	SHEET NO.
C	1-PP19-AR-4130-01	B	

1/24/2025 11:28:41 AM Autodesk Docs://Purple Line Extension/PPL-C-DPAR-1-PP19-AR-M3-0001.rvt

FLOOR AND CEILING LEVEL SCHEDULE

FLOOR LEVEL	FLOOR FINISH LEVEL	CEILING LEVEL	NOTE
LOWER ROOF LEVEL	106.550 FFL		
ENTRANCE 1 , 2 PODIUM LEVEL	102.550 FFL		
ENTRANCE 3 , 4 PODIUM LEVEL	102.550 FFL		
ROOF SLAB LEVEL	98.000 FFL		
MULTIPURPOSE LEVEL	92.170 FFL		
CONCOURSE LEVEL	86.410 FFL		
UPPER PLATFORM LEVEL	80.650 FFL		
TOP OF RAIL LEVEL (PLUP)	79.550 TOR		
LOWER PLATFORM LEVEL	72.350 FFL		
TOP OF RAIL LEVEL (PLLO)	71.250 TOR		

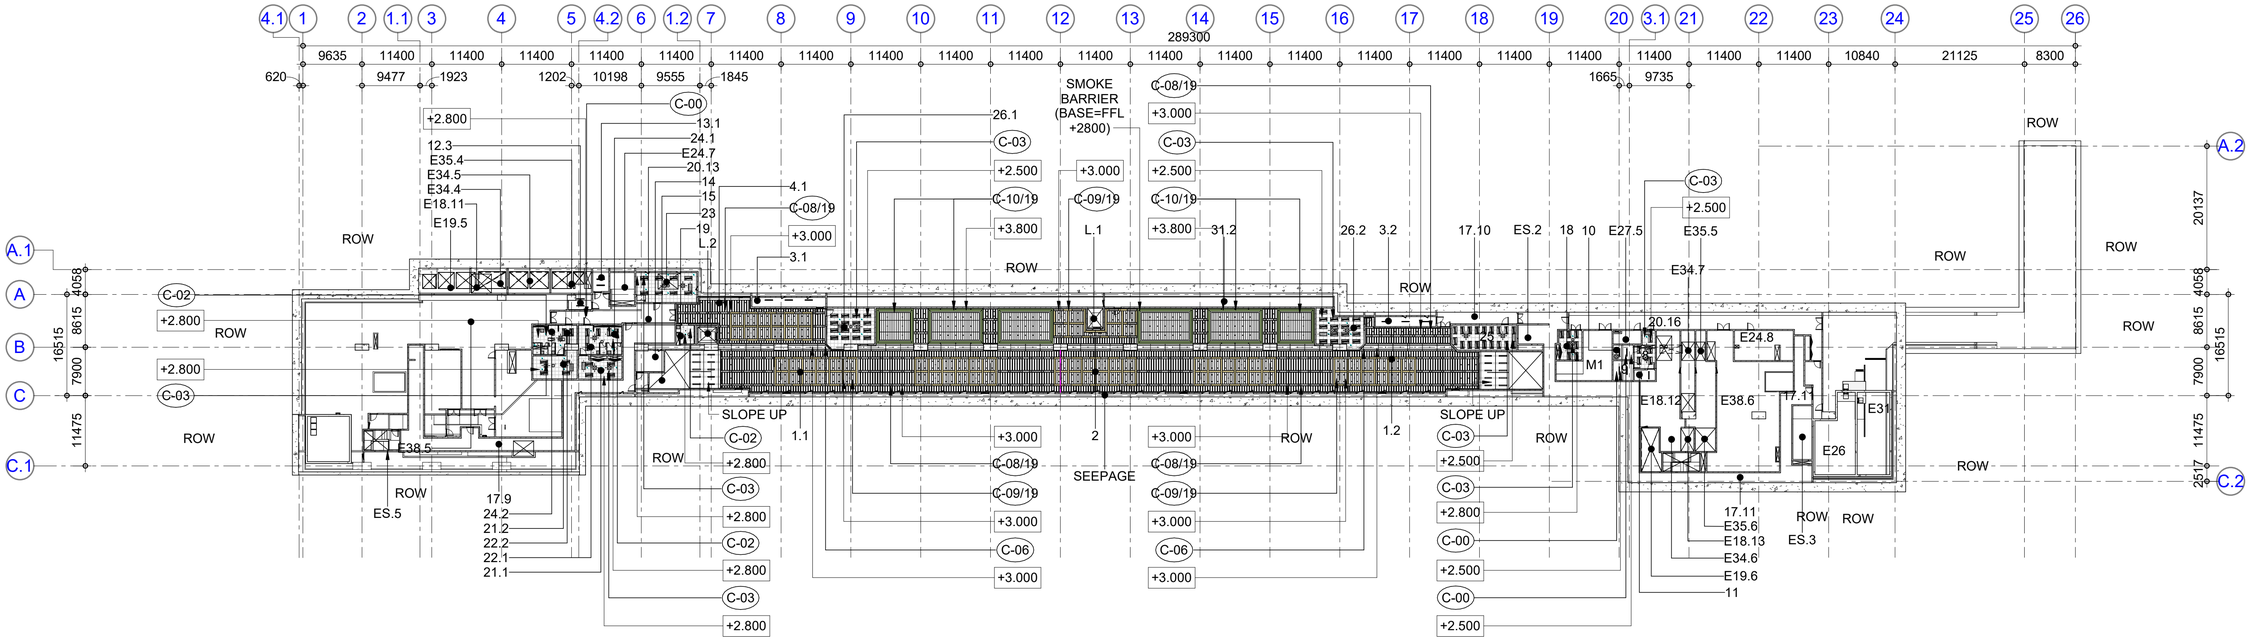

1 CONCOURSE LEVEL - REFLECTED CEILING PLAN

SCALE 1 : 500

NOTES :

1 ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2 LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3 DRAWING TO SCALE WHEN PLOTTED AT A1
4 DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5 ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E & M DRAWINGS , CONTRACT DOCUMENTS AND SPECIFICATIONS
6 FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7 FOR DRAINAGE DETAILS REFER DRAINAGE DRAWINGS
8 DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
9 DIMENSIONS SHOWN FROM DIAPHRAGM WALL ARE FROM LINE OF STRUCTURAL TOLERANCES AS INDICATED. DIMENSIONS SHOWN FROM EXTERNAL RC. WALL ARE NOMINAL AND DO NOT SHOWN FOR STRUCTURAL TOLERANCES. ALL SETTING OUT IS FROM GRIDLINES
10 FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
11 BLOCKWORK WALLS TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN

CEILINGS

C-00 NO CEILING, EXPOSED CONCRETE
C-01 NO CEILING, ACRYLIC INTERIOR PAINT
C-02 600X600 SOLID ALUMINIUM CEILING PANEL WITH POWDER COATING FINISH
C-03 600X600 PERFORATED ALUMINUM CEILING PANEL WITH POWDER COATING FINISH
C-04 300 MM. WIDTH PERFORATED ALUMINIUM CEILING WITH POWDER COATING FINISH (1.2MM THK. WITH ACOUSTIC NON-WOVEN BACKING MIN. 25% FREE AREA). USED AT ADIT AREA
C-05 300 MM. WIDTH PERFORATED ALUMINIUM CEILING WITH POWDER COATING FINISH (1.2MM THK. WITH ACOUSTIC NON-WOVEN BACKING MIN. 25% FREE AREA). USED AT PLATFORM AREA
C-06 SOLID ALUMINIUM COLOUR COATED CEILING PANEL 2MM. THK. USED IN BETWEEN COLUMN
C-07 1200 MM. WIDTH SOLID ALUMINIUM COLOUR COATED CEILING PANEL 2MM. THK.
C-08 300 MM. WIDTH PERFORATED ALUMINIUM COLOUR AND PRINTED PATTER COATED CEILING PANEL 1.2MM. THK WITH FOLDED ALUMINIUM SOLID PANEL ON THE SIDE
C-09 300 MM. WIDTH SOLID ALUMINIUM COLOUR COATED CEILING PANEL 1.2MM THK. CEILING PANEL 1.2MM. THK WITH FOLDED ALUMINIUM SOLID PANEL ON THE SIDE
C-10 CUSTOM DESIGN FEATURE CEILING : 300 MM. WIDTH SOLID ALUMINIUM COLOUR COATED CEILING PANEL 1.2MM THK. WITH PRINTED PATTERN AND FOLDED SOLID ALUMINIUM PANEL ON THE SIDE.
C-11 1500 MM. WIDTH SOLID ALUMINIUM COLOUR COATED CEILING PANEL 2MM. THK.

LEGENDS :

- DIA. 205 DOWNLIGHT
- 1257 x 90 LUMINAIRES
- 1257 x 120 LUMINAIRES
- 200 mm. Width SUPPLY AIR DIFFUSER
- 1200 x 600 RETURN AIR GRILLE
- SMOKE DETECTOR
- 300 WIDE COLOUR COATED METAL CEILING PANEL (LENGTH VARIES)
- SPRINKLER HEAD
- 600 X 600 SUPPLY AIR DIFFUSER

0 10 20 50 100M.
GRAPHIC SCALE 1:500

B

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
PMCSC1
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMSCS1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE
DESIGNER: AECOM

			REV.	DATE	REVISIONS	DWG.	CHK.	APP.
DESIGNER		OYT						
DESIGN CHECKED		AJT	B	24-01-25	CRD UPDATED	LCC	OYT	AJT
PROJECT MANAGER		LCC	A	19-04-24	CRD	LCC	OYT	AJT

PURPLE LINE PROJECT
CONTRACT 1: UNDERGROUND CIVIL WORKS

SCALE : A1 = 1:500 A3 = 1:1000
UNITS : mm.
DATE : 19-04-2024


PP19 : VAJIRA HOSPITAL STATION
CONCOURSE LEVEL - REFLECTED CEILING PLAN

STATUS :	DRAWING NO.	REVISION :	SHEET NO.
C	1-PP19-AR-4150-01	B	

1/24/2025 11:28:54 AM Autodesk Docs://Purple Line Extension/PPL-C-DPAR-1-PP19-AR-M3-0001.rvt

FLOOR AND CEILING LEVEL SCHEDULE

FLOOR LEVEL	FLOOR FINISH LEVEL	CEILING LEVEL	NOTE
LOWER ROOF LEVEL	106.550 FFL		
ENTRANCE 1 , 2 PODIUM LEVEL	102.550 FFL		
ENTRANCE 3 , 4 PODIUM LEVEL	102.550 FFL		
ROOF SLAB LEVEL	98.000 FFL		
MULTIPURPOSE LEVEL	92.170 FFL		
CONCOURSE LEVEL	86.410 FFL		
UPPER PLATFORM LEVEL	80.650 FFL		
TOP OF RAIL LEVEL (PLUP)	79.550 TOR		
LOWER PLATFORM LEVEL	72.350 FFL		
TOP OF RAIL LEVEL (PLLO)	71.250 TOR		

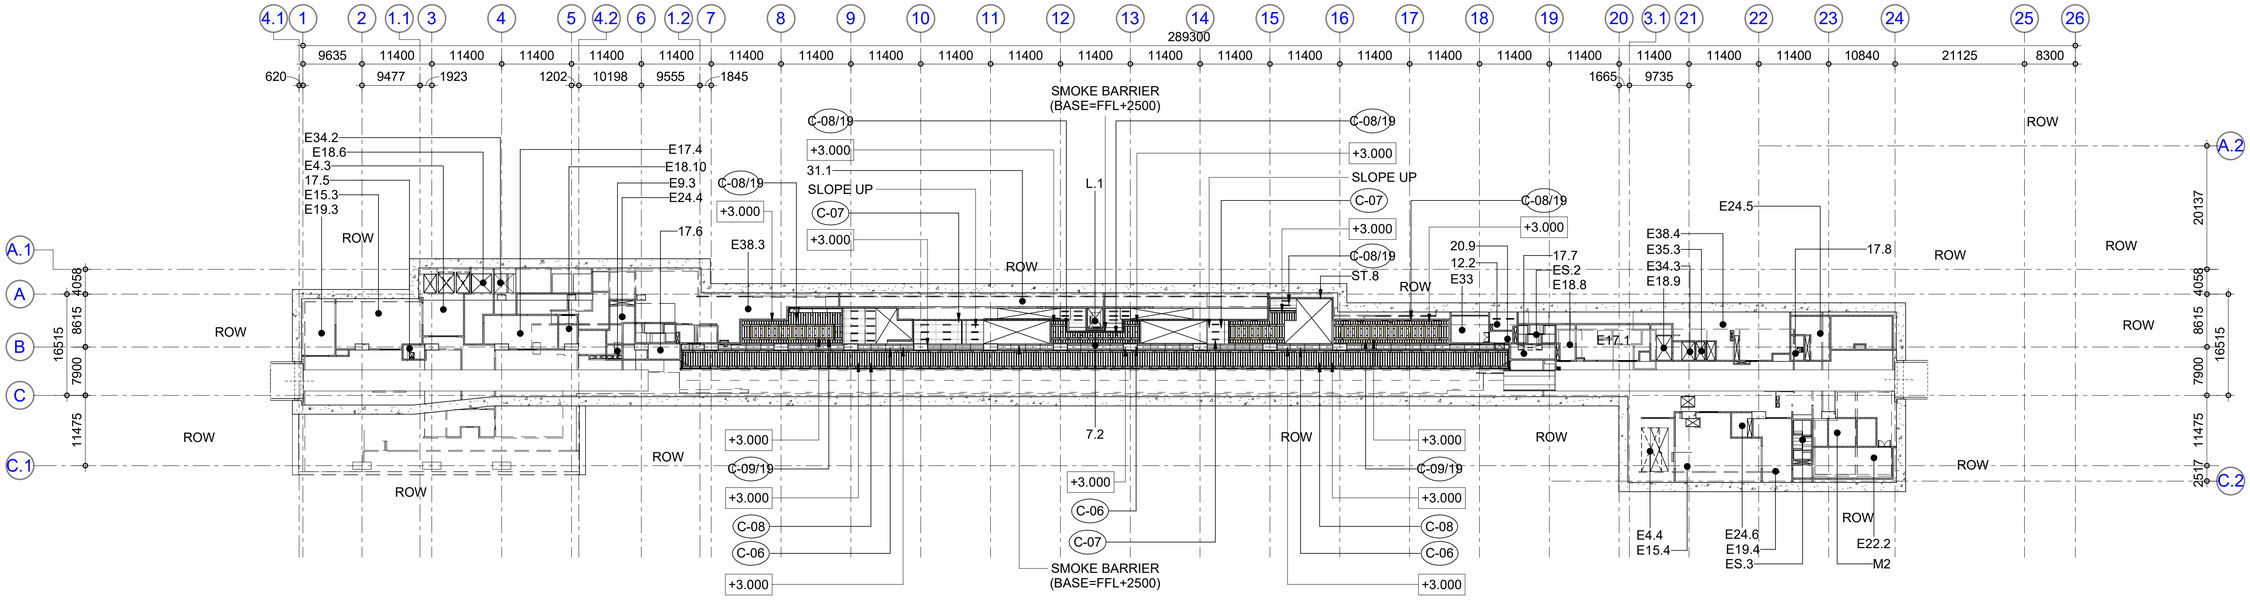

1 UPPER PLATFORM LEVEL - REFLECTED CEILING PLAN

SCALE 1 : 500

NOTES :

1 ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2 LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3 DRAWING TO SCALE WHEN PLOTTED AT A1
4 DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5 ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E & M DRAWINGS , CONTRACT DOCUMENTS AND SPECIFICATIONS
6 FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7 FOR DRAINAGE DETAILS REFER DRAINAGE DRAWINGS
8 DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
9 DIMENSIONS SHOWN FROM DIAPHRAGM WALL ARE FROM LINE OF STRUCTURAL TOLERANCES AS INDICATED. DIMENSIONS SHOWN FROM EXTERNAL RC. WALL ARE NOMINAL AND DO NOT SHOWN FOR STRUCTURAL TOLERANCES. ALL SETTING OUT IS FROM GRIDLINES
10 FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
11 BLOCKWORK WALLS TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN

CEILINGS

C-00 NO CEILING, EXPOSED CONCRETE
C-01 NO CEILING, ACRYLIC INTERIOR PAINT
C-02 600X600 SOLID ALUMINIUM CEILING PANEL WITH POWDER COATING FINISH
C-03 600X600 PERFORATED ALUMINUM CEILING PANEL WITH POWDER COATING FINISH
C-04 300 MM. WIDTH PERFORATED ALUMINIUM CEILING WITH POWDER COATING FINISH (1.2MM THK. WITH ACOUSTIC NON-WOVEN BACKING MIN. 25% FREE AREA). USED AT ADIT AREA
C-05 300 MM. WIDTH PERFORATED ALUMINIUM CEILING WITH POWDER COATING FINISH (1.2MM THK. WITH ACOUSTIC NON-WOVEN BACKING MIN. 25% FREE AREA). USED AT PLATFORM AREA
C-06 SOLID ALUMINIUM COLOUR COATED CEILING PANEL 2MM. THK. USED IN BETWEEN COLUMN
C-07 1200 MM. WIDTH SOLID ALUMINIUM COLOUR COATED CEILING PANEL 2MM. THK.
C-08 300 MM. WIDTH PERFORATED ALUMINIUM COLOUR AND PRINTED PATTER COATED CEILING PANEL 1.2MM. THK WITH FOLDED ALUMINIUM SOLID PANEL ON THE SIDE
C-09 300 MM. WIDTH SOLID ALUMINIUM COLOUR COATED CEILING PANEL 1.2MM THK. CEILING PANEL 1.2MM. THK WITH FOLDED ALUMINIUM SOLID PANEL ON THE SIDE
C-10 CUSTOM DESIGN FEATURE CEILING : 300 MM. WIDTH SOLID ALUMINIUM COLOUR COATED CEILING PANEL 1.2MM THK. WITH PRINTED PATTERN AND FOLDED SOLID ALUMINIUM PANEL ON THE SIDE.
C-11 1500 MM. WIDTH SOLID ALUMINIUM COLOUR COATED CEILING PANEL 2MM. THK.

LEGENDS :

- DIA. 205 DOWNLIGHT
- 1257 x 90 LUMINAIRES
- 1257 x 120 LUMINAIRES
- 200 mm. Width SUPPLY AIR DIFFUSER
- 1200 x 600 RETURN AIR GRILLE
- SMOKE DETECTOR
- 300 WIDE COLOUR COATED METAL CEILING PANEL (LENGTH VARIES)
- SPRINKLER HEAD
- 600 X 600 SUPPLY AIR DIFFUSER

GRAPHIC SCALE 0 10 20 50 100M. 1:500

B

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
PMCSC1
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMSCS1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE
STECON
DESIGNER:
AECOM
TEAM Consulting Engineering and Management Co.,Ltd.
GFE The Geotechnical Expert
SEAHCONSULT ENGINEERING CO.,LTD.

			REV.	DATE	REVISIONS	DWG.	CHK.	APP.
DESIGNER		OYT						
DESIGN CHECKED		AJT	B	24-01-25	CRD UPDATED	LCC	OYT	AJT
PROJECT MANAGER		LCC	A	19-04-24	CRD	LCC	OYT	AJT

PURPLE LINE PROJECT
CONTRACT 1: UNDERGROUND CIVIL WORKS


SCALE : A1 = 1:500 A3 = 1:1000
UNITS : mm.
DATE : 19-04-2024
STATUS : C
DRAWING NO. 1-PP19-AR-4160-01
REVISION : B
SHEET NO.

PP19 : VAJIRA HOSPITAL STATION
UPPER PLATFORM LEVEL - REFLECTED CEILING PLAN

1/24/2025 11:29:03 AM Autodesk Docs://Purple Line Extension/PPL-C-DPAR-1-PP19-AR-M3-0001.rvt

FLOOR AND CEILING LEVEL SCHEDULE

FLOOR LEVEL	FLOOR FINISH LEVEL	CEILING LEVEL	NOTE
LOWER ROOF LEVEL	106.550 FFL		
ENTRANCE 1 , 2 PODIUM LEVEL	102.550 FFL		
ENTRANCE 3 , 4 PODIUM LEVEL	102.550 FFL		
ROOF SLAB LEVEL	98.000 FFL		
MULTIPURPOSE LEVEL	92.170 FFL		
CONCOURSE LEVEL	86.410 FFL		
UPPER PLATFORM LEVEL	80.650 FFL		
TOP OF RAIL LEVEL (PLUP)	79.550 TOR		
LOWER PLATFORM LEVEL	72.350 FFL		
TOP OF RAIL LEVEL (PLLO)	71.250 TOR		

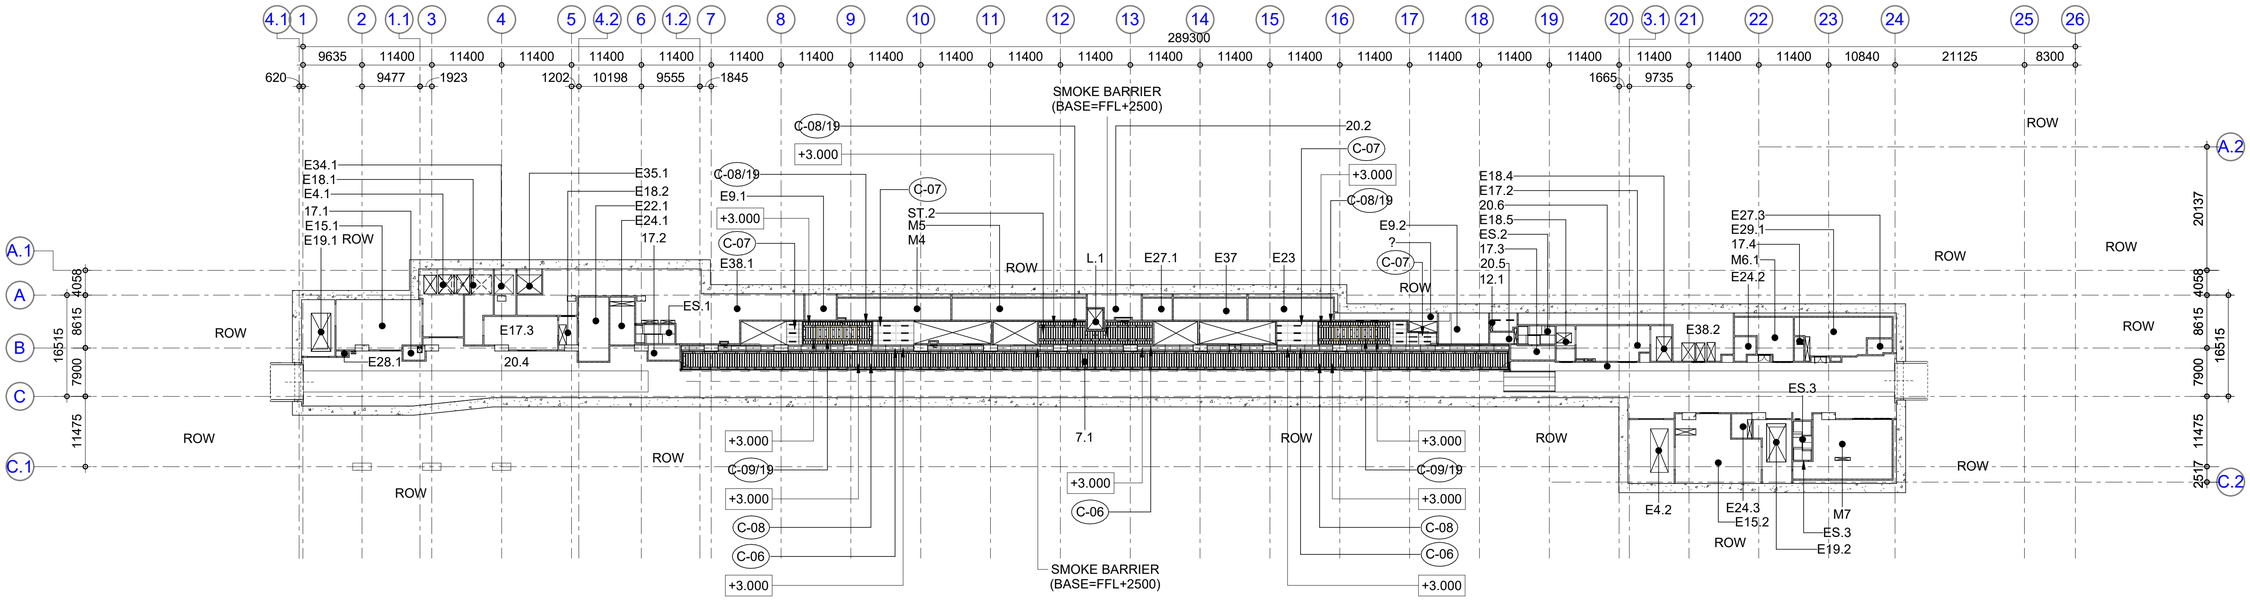

1 LOWER PLATFORM LEVEL - REFLECTED CEILING PLAN

SCALE 1 : 500

NOTES :

1 ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2 LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3 DRAWING TO SCALE WHEN PLOTTED AT A1
4 DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5 ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E & M DRAWINGS , CONTRACT DOCUMENTS AND SPECIFICATIONS
6 FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7 FOR DRAINAGE DETAILS REFER DRAINAGE DRAWINGS
8 DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
9 DIMENSIONS SHOWN FROM DIAPHRAGM WALL ARE FROM LINE OF STRUCTURAL TOLERANCES AS INDICATED. DIMENSIONS SHOWN FROM EXTERNAL RC. WALL ARE NOMINAL AND DO NOT SHOWN FOR STRUCTURAL TOLERANCES. ALL SETTING OUT IS FROM GRIDLINES
10 FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
11 BLOCKWORK WALLS TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN

CEILINGS

C-00 NO CEILING, EXPOSED CONCRETE
C-01 NO CEILING, ACRYLIC INTERIOR PAINT
C-02 600X600 SOLID ALUMINIUM CEILING PANEL WITH POWDER COATING FINISH
C-03 600X600 PERFORATED ALUMINUM CEILING PANEL WITH POWDER COATING FINISH
C-04 300 MM. WIDTH PERFORATED ALUMINIUM CEILING WITH POWDER COATING FINISH (1.2MM THK. WITH ACOUSTIC NON-WOVEN BACKING MIN. 25% FREE AREA). USED AT ADIT AREA
C-05 300 MM. WIDTH PERFORATED ALUMINIUM CEILING WITH POWDER COATING FINISH (1.2MM THK. WITH ACOUSTIC NON-WOVEN BACKING MIN. 25% FREE AREA). USED AT PLATFORM AREA
C-06 SOLID ALUMINIUM COLOUR COATED CEILING PANEL 2MM. THK. USED IN BETWEEN COLUMN
C-07 1200 MM. WIDTH SOLID ALUMINIUM COLOUR COATED CEILING PANEL 2MM. THK.
C-08 300 MM. WIDTH PERFORATED ALUMINIUM COLOUR AND PRINTED PATTER COATED CEILING PANEL 1.2MM. THK WITH FOLDED ALUMINIUM SOLID PANEL ON THE SIDE
C-09 300 MM. WIDTH SOLID ALUMINIUM COLOUR COATED CEILING PANEL 1.2MM THK. CEILING PANEL 1.2MM. THK WITH FOLDED ALUMINIUM SOLID PANEL ON THE SIDE
C-10 CUSTOM DESIGN FEATURE CEILING : 300 MM. WIDTH SOLID ALUMINIUM COLOUR COATED CEILING PANEL 1.2MM THK. WITH PRINTED PATTERN AND FOLDED SOLID ALUMINIUM PANEL ON THE SIDE.
C-11 1500 MM. WIDTH SOLID ALUMINIUM COLOUR COATED CEILING PANEL 2MM. THK.

LEGENDS :

- DIA. 205 DOWNLIGHT
- 1257 x 90 LUMINAIRES
- 1257 x 120 LUMINAIRES
- 200 mm. Width SUPPLY AIR DIFFUSER
- 1200 x 600 RETURN AIR GRILLE
- SMOKE DETECTOR
- 300 WIDE COLOUR COATED METAL CEILING PANEL (LENGTH VARIES)
- SPRINKLER HEAD
- 600 X 600 SUPPLY AIR DIFFUSER

GRAPHIC SCALE 0 10 20 50 100M. 1:500

B

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
PMCSC1
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMSCS1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE
STECON
DESIGNER: AECOM
TEAM Consulting Engineering and Management Co.,Ltd.
GFE The Geotechnical Expert

DESIGNER	OYT								
DESIGN CHECKED	AJT	B	24-01-25	CRD UPDATED	LCC	OYT	AJT		
PROJECT MANAGER	LCC	A	19-04-24	CRD	LCC	OYT	AJT		
		REV.	DATE	REVISIONS	DWG.	CHK.	APP.		

PURPLE LINE PROJECT
CONTRACT 1: UNDERGROUND CIVIL WORKS


SCALE : A1 = 1:500 A3 = 1:1000
UNITS : mm.
DATE : 19-04-2024
STATUS : C
DRAWING NO. 1-PP19-AR-4180-01
REVISION : B
SHEET NO.

PP19 : VAJIRA HOSPITAL STATION
LOWER PLATFORM LEVEL - REFLECTED CEILING PLAN

1/24/2025 11:29:11 AM Autodesk Docs://Purple Line Extension/PPL-C-DPAR-1-PP19-AR-M3-0001.rvt

FLOOR AND CEILING LEVEL SCHEDULE

FLOOR LEVEL	FLOOR FINISH LEVEL	CEILING LEVEL	NOTE
LOWER ROOF LEVEL	106.550 FFL		
ENTRANCE 1 , 2 PODIUM LEVEL	102.550 FFL		
ENTRANCE 3 , 4 PODIUM LEVEL	102.550 FFL		
ROOF SLAB LEVEL	98.000 FFL		
MULTIPURPOSE LEVEL	92.170 FFL		
CONCOURSE LEVEL	86.410 FFL		
UPPER PLATFORM LEVEL	80.650 FFL		
TOP OF RAIL LEVEL (PLUP)	79.550 TOR		
LOWER PLATFORM LEVEL	72.350 FFL		
TOP OF RAIL LEVEL (PLLO)	71.250 TOR		

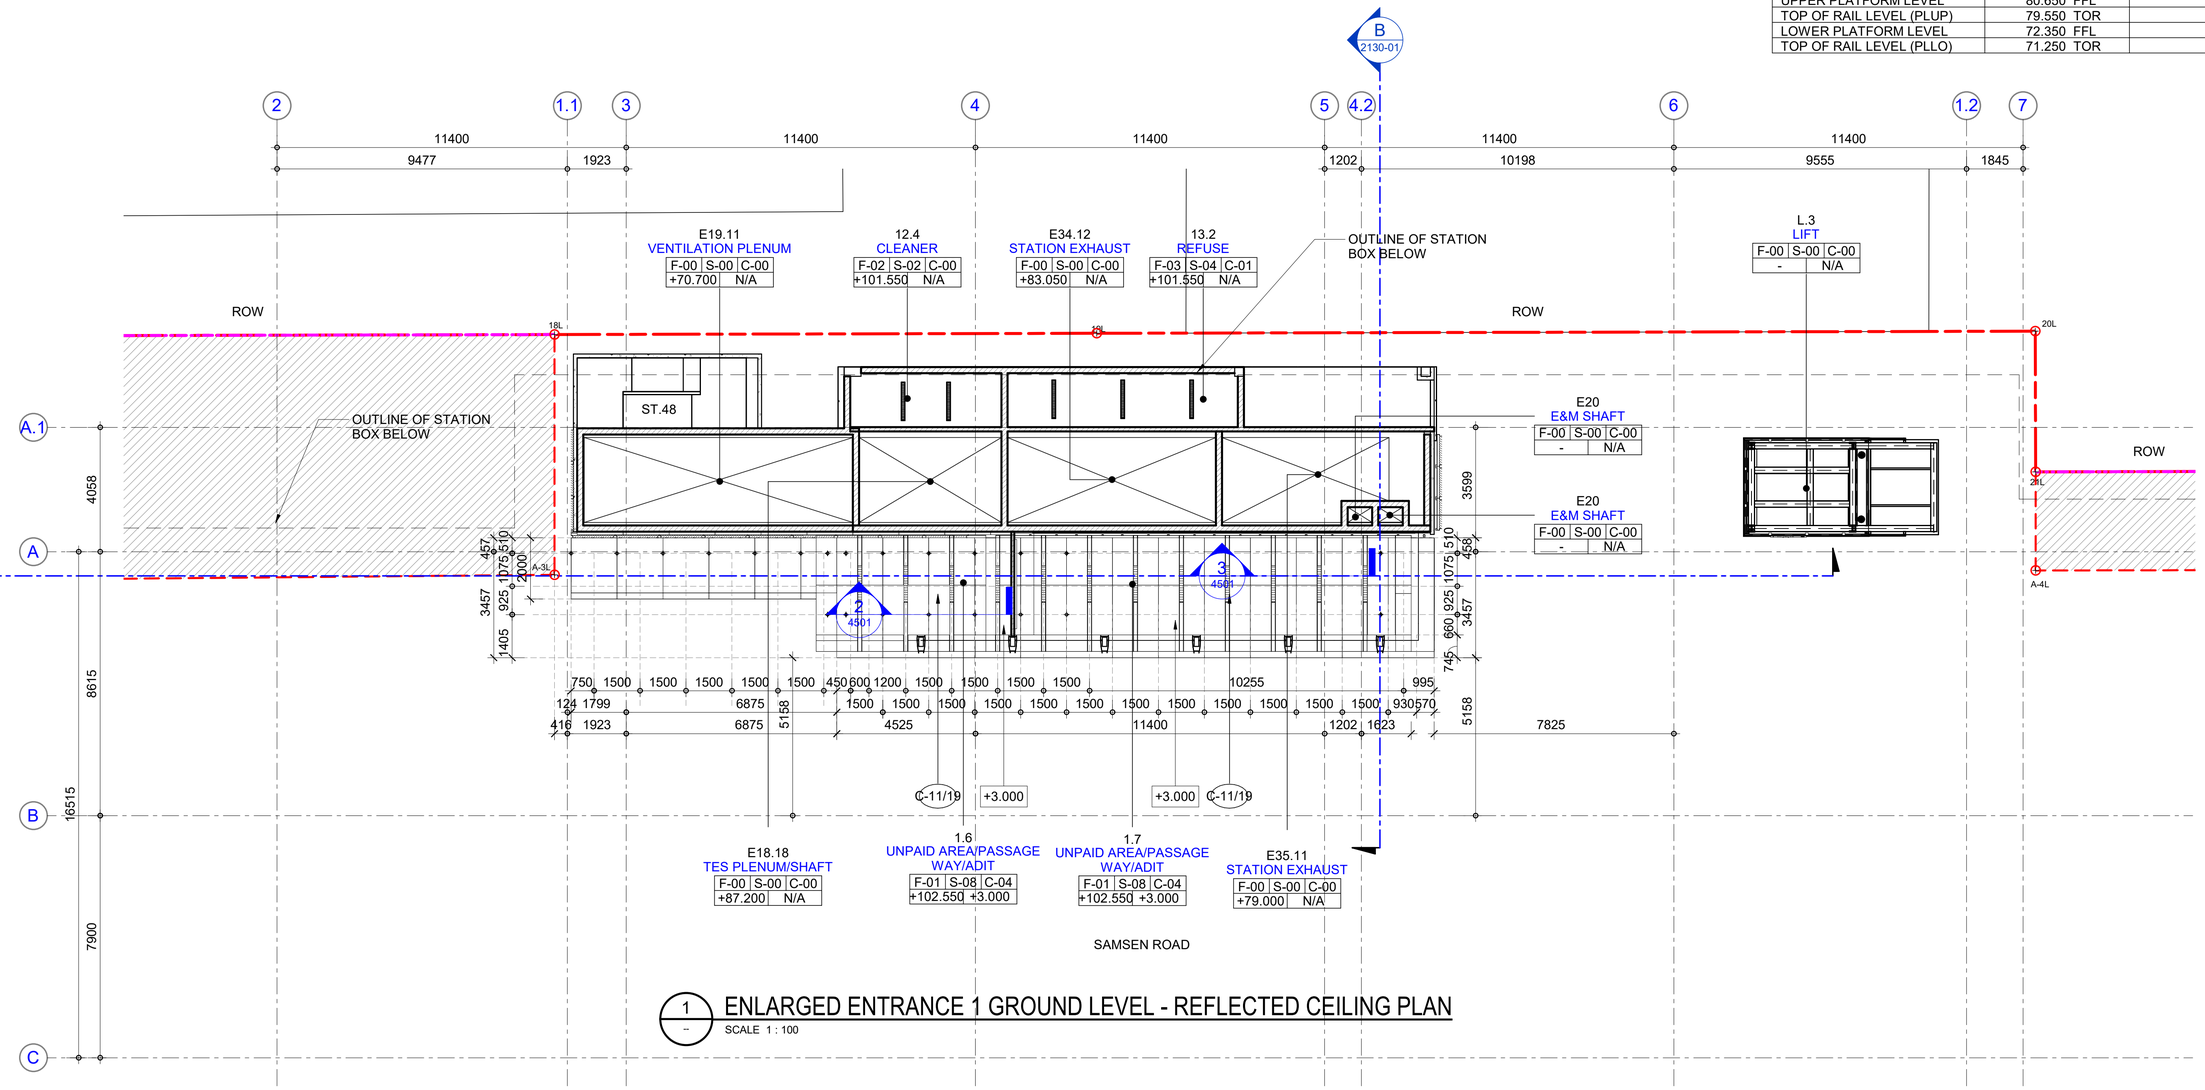

1 ENLARGED ENTRANCE 1 GROUND LEVEL - REFLECTED CEILING PLAN

SCALE 1 : 100

NOTES :

1. ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2. LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3. DRAWING TO SCALE WHEN PLOTTED AT A1
4. DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5. ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E&M DRAWINGS, CONTRACT DOCUMENTS AND SPECIFICATIONS
6. FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7. DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
8. BLOCKWORK WALLS/ LIGHT WEIGHT CONCRETE PANEL (LPC) WALL TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN
9. FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
10. TO BE READ IN CONJUNCTION WITH SUBM. NO. 1-PROJ-AR-2311-1 & GRAPHIC DESIGN PACKAGE.

LEGENDS :

FLOOR FINISH LEVEL — ROOM NUMBER / ROOM NAME — CEILING TYPE — SKIRTING TYPE (F-00 S-00 C-00) — CEILING HEIGHT FROM FFL (+00.000 +0.000)

REFER TO 'OPERATION ROOMS' DETAIL DWG. NO. 1-PP19-AR-5XXX-1

X PP19-AR-XXXX-01 REFER TO SUBM. NO. 1-PP19-AR-XXXX-1

X XXXX REFER TO SUBM. NO. 1-PROJ-AR-2311-1 & 1-PROJ-AR-2321-1

FINISHES CODE :

CEILINGS

- **C-00** NO CEILING, EXPOSED CONCRETE
- **C-01** NO CEILING, ACRYLIC INTERIOR PAINT
- **C-02** 600X600 SOLID ALUMN CEILING PANEL
- **C-03** 600X600 PERFORATED ALUMN CEILING PANEL
- **C-04** (ADIT) & C-05 (PSD) & C-08 (CONCOURSE/ PLATFORM) 300MM (W) PARTIAL PERFORATED ALUMN CEILING PLANK WITH ACOUSTIC NON-WOVEN BACKING [MIN. 25% FREE AREA] C/W 200MM (W) ALUMN CEILING RUNNER
- **C-06** SOLID ALUMN CEILING PANEL
- **C-07** 1200MM (W) SOLID ALUMN CEILING PANEL
- **C-09** 300MM (W) SOLID ALUMN CEILING PANEL C/W ALUMN GRID RUNNER
- **C-10** FEATURE CEILING : 300MM (W) SOLID ALUMN CEILING PANEL WITH PRINTED PATTERN C/W STEPPING CEILING ON 4-SIDE
- **C-11** 1500 MM (W) SOLID ALUMN CEILING PANEL

NOTES:
1. ALL ALUMN WORKS TO BE IN POWDER COATING FINISH, OTHERWISE STATED.

CEILING FINISHES :

- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- SOLID ALUMN CEILING
- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- 300MM (W) ALUMN CEILING WITH PRINTED GRAPHIC
- SOLID ALUMN CEILING
- SOLID ALUMN GRID RUNNERS
- SOLID ALUMN TRIMMING / STEPPING ALUMN CEILING

LEGENDS FOR E&M FIXTURES:


- RECESSED DOWNLIGHT
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ DISFUSSER
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ LOUVRE
- 300x600 DB. RECESSED FLUORESCENT W/ LOUVRE
- RECESSED WALL MOUNT LIGHT
- SURFACED WALL MOUNT LIGHT [L1: ROUND SHAPE, L2: SQUARE SHAPE] (L1)

NOTES:
1. ALL ALUMN CEILING RUNNER TO BE IN 'DARK GREY' COLOUR

- 1200x600 & 600x600 RETURN AIR GRILLE
- 1200x200MM SUPPLY / RETURN AIR DIFFUSER
- 600x600 SUPPLY AIR DIFFUSER
- SMOKE / HEAT DETECTOR
- SPRINKLER HEAD
- LAMP POST
- LAMP POST
- LED STRIP LIGHT

GRAPHIC SCALE 0 1 2 5 10 M. — 1:100

KEY PLAN

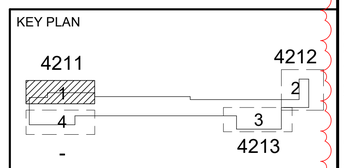

B

PURPLE LINE PROJECT

CONTRACT 1: UNDERGROUND CIVIL WORKS

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
PMCSC1
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMSCS1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE
DESIGNER: AECOM
TEAM Consulting Engineering and Management Co.,Ltd.
GFE The Geotechnical Expert

DESIGNER		OYT
DESIGN CHECKED		AJT
PROJECT MANAGER		LCC

REV.	DATE	REVISIONS	DWG.	CHK.	APP.
B	24-01-25	CRD UPDATED	LCC	OYT	AJT
A	19-04-24	CRD	LCC	OYT	AJT

SCALE : A1 = 1:100, A3 = 1:200
UNITS : mm.
DATE : 19-04-2024


PP19 : VAJIRA HOSPITAL STATION
ENTRANCE 1 GROUND LEVEL - REFLECTED CEILING PLAN

STATUS : C
DRAWING NO. 1-PP19-AR-4211-01
REVISION : B
SHEET NO.

1/24/2025 11:29:19 AM Autodesk Docs://Purple Line Extension/PPL-C-DPAR-1-PP19-AR-M3-0001.rvt

FLOOR AND CEILING LEVEL SCHEDULE

FLOOR LEVEL	FLOOR FINISH LEVEL	CEILING LEVEL	NOTE
LOWER ROOF LEVEL	106.550 FFL		
ENTRANCE 1 , 2 PODIUM LEVEL	102.550 FFL		
ENTRANCE 3 , 4 PODIUM LEVEL	102.550 FFL		
ROOF SLAB LEVEL	98.000 FFL		
MULTIPURPOSE LEVEL	92.170 FFL		
CONCOURSE LEVEL	86.410 FFL		
UPPER PLATFORM LEVEL	80.650 FFL		
TOP OF RAIL LEVEL (PLUP)	79.550 TOR		
LOWER PLATFORM LEVEL	72.350 FFL		
TOP OF RAIL LEVEL (PLLO)	71.250 TOR		

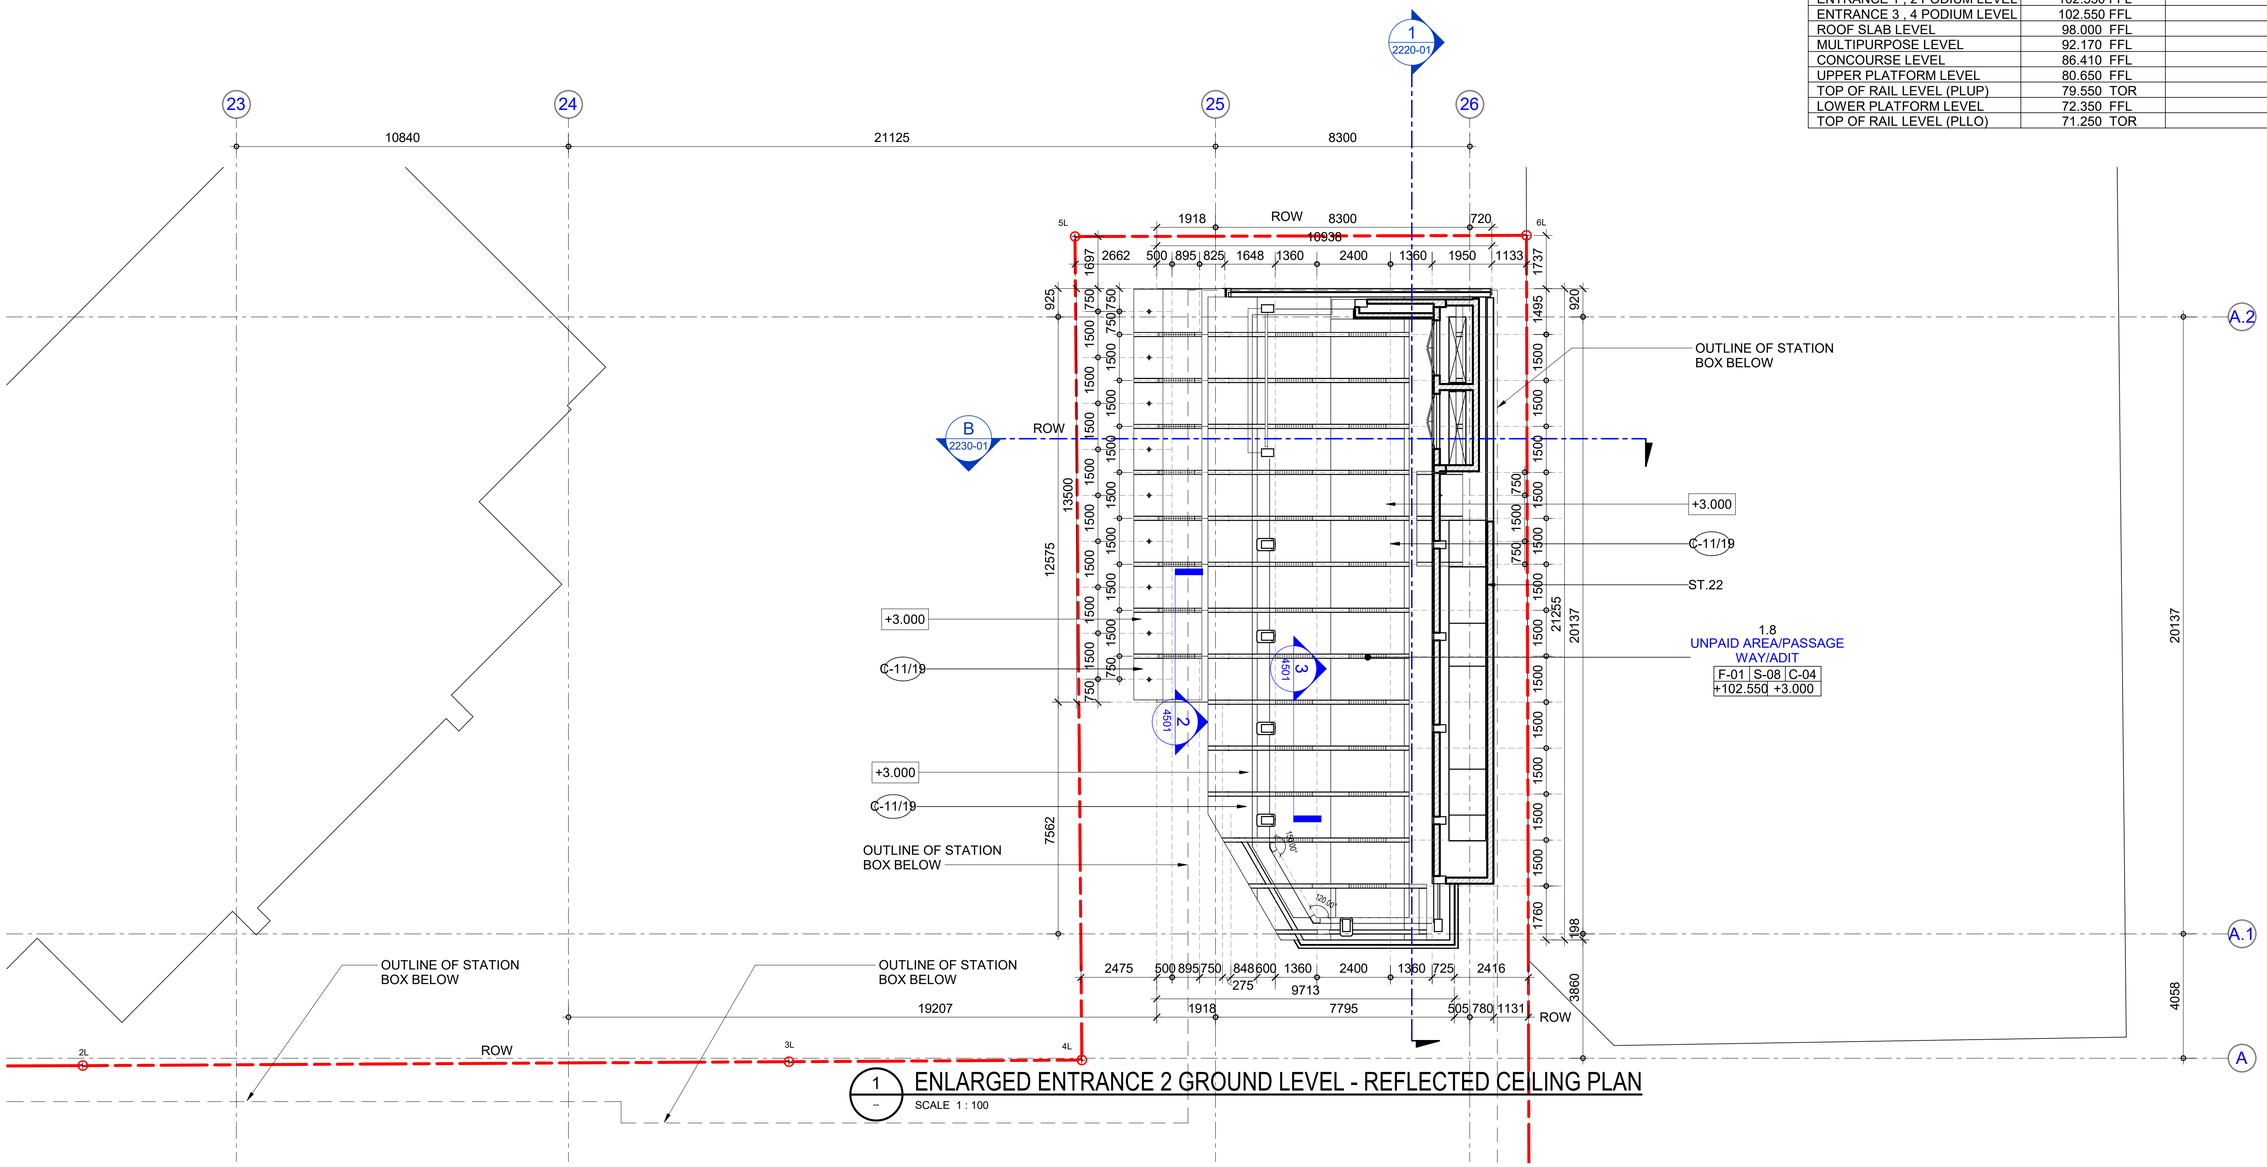

1 -- ENLARGED ENTRANCE 2 GROUND LEVEL - REFLECTED CEILING PLAN
SCALE 1 : 100

NOTES :

1. ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2. LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3. DRAWING TO SCALE WHEN PLOTTED AT A1
4. DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5. ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E&M DRAWINGS, CONTRACT DOCUMENTS AND SPECIFICATIONS
6. FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7. DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
8. BLOCKWORK WALLS/ LIGHT WEIGHT CONCRETE PANEL (LPC) WALL TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN
9. FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
10. TO BE READ IN CONJUNCTION WITH SUBM. NO. 1-PROJ-AR-2311-1 & GRAPHIC DESIGN PACKAGE.

LEGENDS :

FLOOR FINISH NUMBER — ROOM NUMBER / ROOM NAME — CEILING TYPE — SKIRTING TYPE — CEILING HEIGHT FROM FFL — FINISHED FLOOR LEVEL

F-00 | S-00 | C-00
+00.000 | +0.000

REFER TO 'OPERATION ROOMS' DETAIL DWG. NO. 1-PP19-AR-5XXX-1

X / PP19-AR-XXXX-01 — REFER TO SUBM. NO. 1-PP19-AR-XXXX-1

X / XXXX — REFER TO SUBM. NO. 1-PROJ-AR-2311-1 & 1-PROJ-AR-2321-1

FINISHES CODE :

CEILINGS

C-00 NO CEILING, EXPOSED CONCRETE
C-01 NO CEILING, ACRYLIC INTERIOR PAINT
C-02 600X600 SOLID ALUMN CEILING PANEL
C-03 600X600 PERFORATED ALUMN CEILING PANEL
C-04 (ADIT) & C-05 (PSD) & C-08 (CONCOURSE/ PLATFORM) 300MM (W) PARTIAL PERFORATED ALUMN CEILING PLANK WITH ACOUSTIC NON-WOVEN BACKING [MIN. 25% FREE AREA] C/W 200MM (W) ALUMN CEILING RUNNER
C-06 SOLID ALUMN CEILING PANEL
C-07 1200MM (W) SOLID ALUMN CEILING PANEL
C-09 300MM (W) SOLID ALUMN CEILING PANEL C/W ALUMN GRID RUNNER
C-10 FEATURE CEILING : 300MM (W) SOLID ALUMN CEILING PANEL WITH PRINTED PATTERN C/W STEPPING CEILING ON 4-SIDE
C-11 1500 MM (W) SOLID ALUMN CEILING PANEL

NOTES:
1. ALL ALUMN WORKS TO BE IN POWDER COATING FINISH, OTHERWISE STATED.

CEILING FINISHES :

- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- SOLID ALUMN CEILING
- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- 300MM (W) ALUMN CEILING WITH PRINTED GRAPHIC
- SOLID ALUMN CEILING
- SOLID ALUMN GRID RUNNERS
- SOLID ALUMN TRIMMING / STEPPING ALUMN CEILING

LEGENDS FOR E&M FIXTURES:


- RECESSED DOWNLIGHT
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ DISFUSSER
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ LOUVRE
- 300x600 DB. RECESSED FLUORESCENT W/ LOUVRE
- RECESSED WALL MOUNT LIGHT
- SURFACED WALL MOUNT LIGHT [L1: ROUND SHAPE, L2: SQUARE SHAPE] (L1)
- 1200x600 & 600x600 RETURN AIR GRILLE
- 600x600 SUPPLY AIR DIFFUSER
- SMOKE / HEAT DETECTOR
- SPRINKLER HEAD
- LAMP POST
- LAMP POST
- LED STRIP LIGHT
- 1200x200MM SUPPLY / RETURN AIR DIFFUSER

NOTES:
1. ALL ALUMN CEILING RUNNER TO BE IN 'DARK GREY' COLOUR

B

0 1 2 5 10 M.
GRAPHIC SCALE 1:100

KEY PLAN

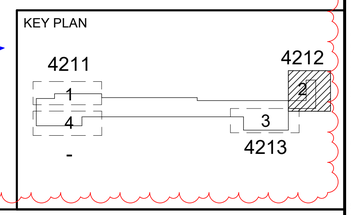

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
PMCSC1
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMSCS1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE
DESIGNER: AECOM
TEAM Consulting Engineering and Management Co.,Ltd.
GFE The Geotechnical Expert

DESIGNER		OYT	
DESIGN CHECKED		AJT	
PROJECT MANAGER		LCC	

REV.	DATE	REVISIONS	DWG.	CHK.	APP.
B	24-01-25	CRD UPDATED	LCC	OYT	AJT
A	19-04-24	CRD	LCC	OYT	AJT

PURPLE LINE PROJECT
CONTRACT 1: UNDERGROUND CIVIL WORKS

SCALE : A1 = 1:100, A3 = 1:200
UNITS : mm.
DATE : 19-04-2024


PP19 : VAJIRA HOSPITAL STATION
ENTRANCE 2 GROUND LEVEL - REFLECTED CEILING PLAN

STATUS :	DRAWING NO.	REVISION :	SHEET NO.
C	1-PP19-AR-4212-01	B	

1/24/2025 11:29:26 AM Autodesk Docs://Purple Line Extension/PPL-C-DPAR-1-PP19-AR-M3-0001.rvt

FLOOR AND CEILING LEVEL SCHEDULE

FLOOR LEVEL	FLOOR FINISH LEVEL	CEILING LEVEL	NOTE
LOWER ROOF LEVEL	106.550 FFL		
ENTRANCE 1 , 2 PODIUM LEVEL	102.550 FFL		
ENTRANCE 3 , 4 PODIUM LEVEL	102.550 FFL		
ROOF SLAB LEVEL	98.000 FFL		
MULTIPURPOSE LEVEL	92.170 FFL		
CONCOURSE LEVEL	86.410 FFL		
UPPER PLATFORM LEVEL	80.650 FFL		
TOP OF RAIL LEVEL (PLUP)	79.550 TOR		
LOWER PLATFORM LEVEL	72.350 FFL		
TOP OF RAIL LEVEL (PLLO)	71.250 TOR		

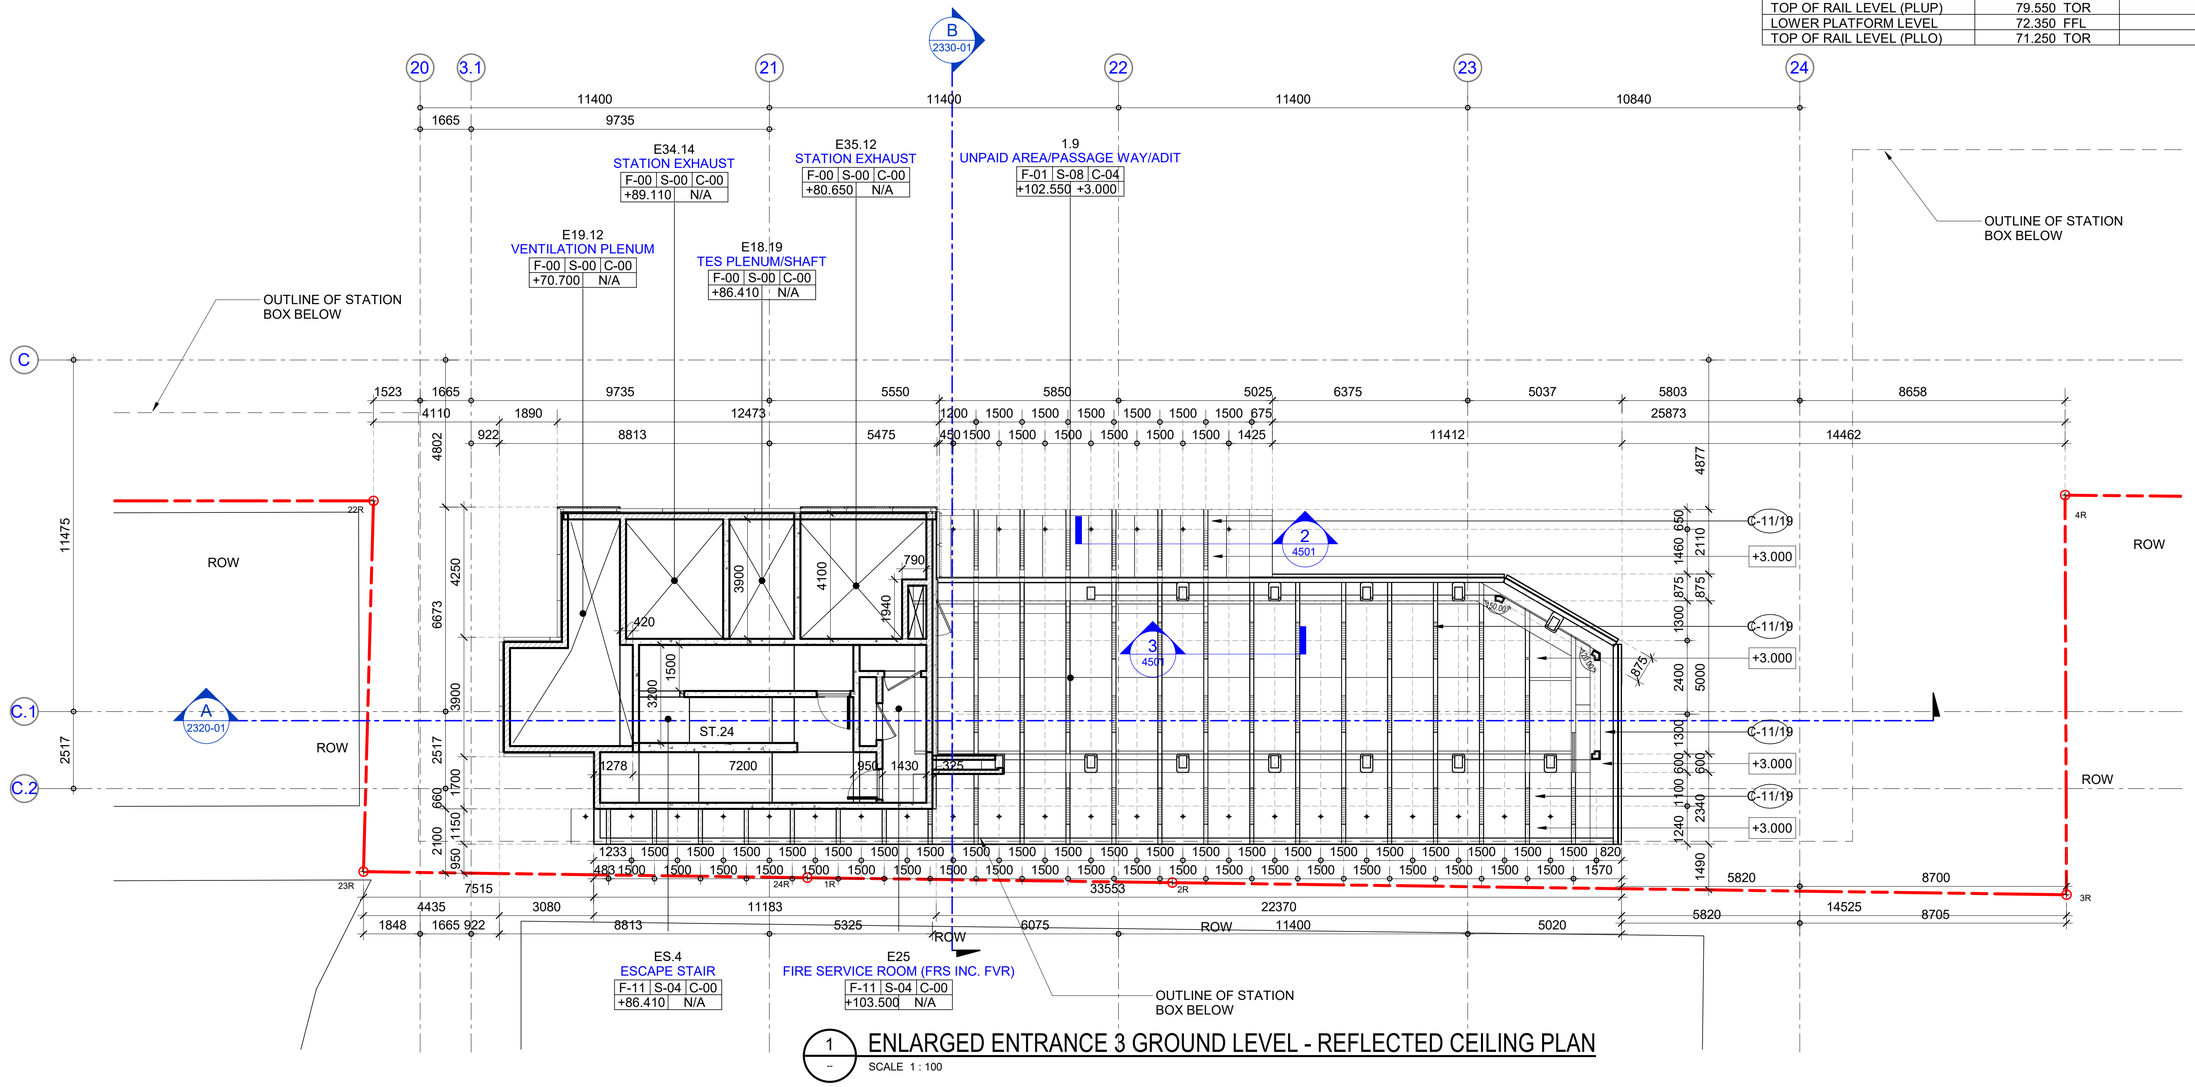

1 -- ENLARGED ENTRANCE 3 GROUND LEVEL - REFLECTED CEILING PLAN

SCALE 1 : 100

NOTES :

1. ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2. LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3. DRAWING TO SCALE WHEN PLOTTED AT A1
4. DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5. ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E&M DRAWINGS, CONTRACT DOCUMENTS AND SPECIFICATIONS
6. FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7. DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
8. BLOCKWORK WALLS/ LIGHT WEIGHT CONCRETE PANEL (LPC) WALL TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN
9. FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
10. TO BE READ IN CONJUNCTION WITH SUBM. NO. 1-PROJ-AR-2311-1 & GRAPHIC DESIGN PACKAGE.

LEGENDS :

FLOOR FINISH LEVEL — ROOM NUMBER / ROOM NAME — CEILING TYPE — SKIRTING TYPE — CEILING HEIGHT FROM FFL

F-00 S-00 C-00
+00.000 +0.000

REFER TO 'OPERATION ROOMS' DETAIL DWG. NO. 1-PP19-AR-5XXX-1

X PP19-AR-XXXX-01 REFER TO SUBM. NO. 1-PP19-AR-XXXX-1

X XXXX REFER TO SUBM. NO. 1-PROJ-AR-2311-1 & 1-PROJ-AR-2321-1

FINISHES CODE :

CEILINGS

C-00 NO CEILING, EXPOSED CONCRETE
C-01 NO CEILING, ACRYLIC INTERIOR PAINT
C-02 600X600 SOLID ALUMN CEILING PANEL
C-03 600X600 PERFORATED ALUMN CEILING PANEL
C-04 (ADIT) & C-05 (PSD) & C-08 (CONCOURSE/ PLATFORM) 300MM (W) PARTIAL PERFORATED ALUMN CEILING PLANK WITH ACOUSTIC NON-WOVEN BACKING [MIN. 25% FREE AREA] C/W 200MM (W) ALUMN CEILING RUNNER
C-06 SOLID ALUMN CEILING PANEL
C-07 1200MM (W) SOLID ALUMN CEILING PANEL
C-09 300MM (W) SOLID ALUMN CEILING PANEL C/W ALUMN GRID RUNNER
C-10 FEATURE CEILING : 300MM (W) SOLID ALUMN CEILING PANEL WITH PRINTED PATTERN C/W STEPPING CEILING ON 4-SIDE
C-11 1500 MM (W) SOLID ALUMN CEILING PANEL

NOTES:
1. ALL ALUMN WORKS TO BE IN POWDER COATING FINISH, OTHERWISE STATED.

CEILING FINISHES :

- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- SOLID ALUMN CEILING
- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- 300MM (W) ALUMN CEILING WITH PRINTED GRAPHIC
- SOLID ALUMN CEILING
- SOLID ALUMN GRID RUNNERS
- SOLID ALUMN TRIMMING / STEPPING ALUMN CEILING

LEGENDS FOR E&M FIXTURES:


- RECESSED DOWNLIGHT
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ DISFUSSER
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ LOUVRE
- 300x600 DB. RECESSED FLUORESCENT W/ LOUVRE
- RECESSED WALL MOUNT LIGHT
- SURFACED WALL MOUNT LIGHT [L1: ROUND SHAPE, L2: SQUARE SHAPE] (L1)
- 1200x600 & 600x600 RETURN AIR GRILLE
- 600x600 SUPPLY AIR DIFFUSER
- SMOKE / HEAT DETECTOR
- SPRINKLER HEAD
- LAMP POST
- LAMP POST
- LED STRIP LIGHT
- 1200x200MM SUPPLY / RETURN AIR DIFFUSER

NOTES:
1. ALL ALUMN CEILING RUNNER TO BE IN 'DARK GREY' COLOUR

B

0 1 2 5 10 M.
GRAPHIC SCALE 1:100

KEY PLAN

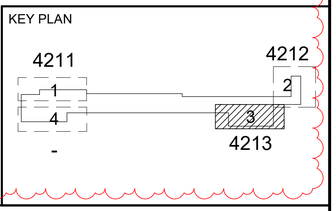

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
PMCSC1
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMCS1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE
STECON

DESIGNER: AECOM
TEAM Consulting Engineering and Management Co.,Ltd.
GFE The Geotechnical Expert

DESIGNER		OYT
DESIGN CHECKED		AJT
PROJECT MANAGER		LCC

REV.	DATE	REVISIONS	DWG.	CHK.	APP.
B	24-01-25	CRD UPDATED	LCC	OYT	AJT
A	19-04-24	CRD	LCC	OYT	AJT

PURPLE LINE PROJECT
CONTRACT 1: UNDERGROUND CIVIL WORKS


SCALE : A1 = 1:100, A3 = 1:200
UNITS : mm.
DATE : 19-04-2024

PP19 : VAJIRA HOSPITAL STATION
ENTRANCE 3 GROUND LEVEL - REFLECTED CEILING PLAN

STATUS : C
DRAWING NO. 1-PP19-AR-4213-01
REVISION : B
SHEET NO.

1/24/2025 11:29:40 AM Autodesk Docs://Purple Line Extension/PPL_C_DPAR_1_PP19_AR_M3_0001.rvt

FLOOR AND CEILING LEVEL SCHEDULE			
FLOOR LEVEL	FLOOR FINISH LEVEL	CEILING LEVEL	NOTE
LOWER ROOF LEVEL	106.550 FFL		
ENTRANCE 1 , 2 PODIUM LEVEL	102.550 FFL		
ENTRANCE 3 , 4 PODIUM LEVEL	102.550 FFL		
ROOF SLAB LEVEL	98.000 FFL		
MULTIPURPOSE LEVEL	92.170 FFL		
CONCOURSE LEVEL	86.410 FFL		
UPPER PLATFORM LEVEL	80.650 FFL		
TOP OF RAIL LEVEL (PLUP)	79.550 TOR		
LOWER PLATFORM LEVEL	72.350 FFL		
TOP OF RAIL LEVEL (PLLO)	71.250 TOR		

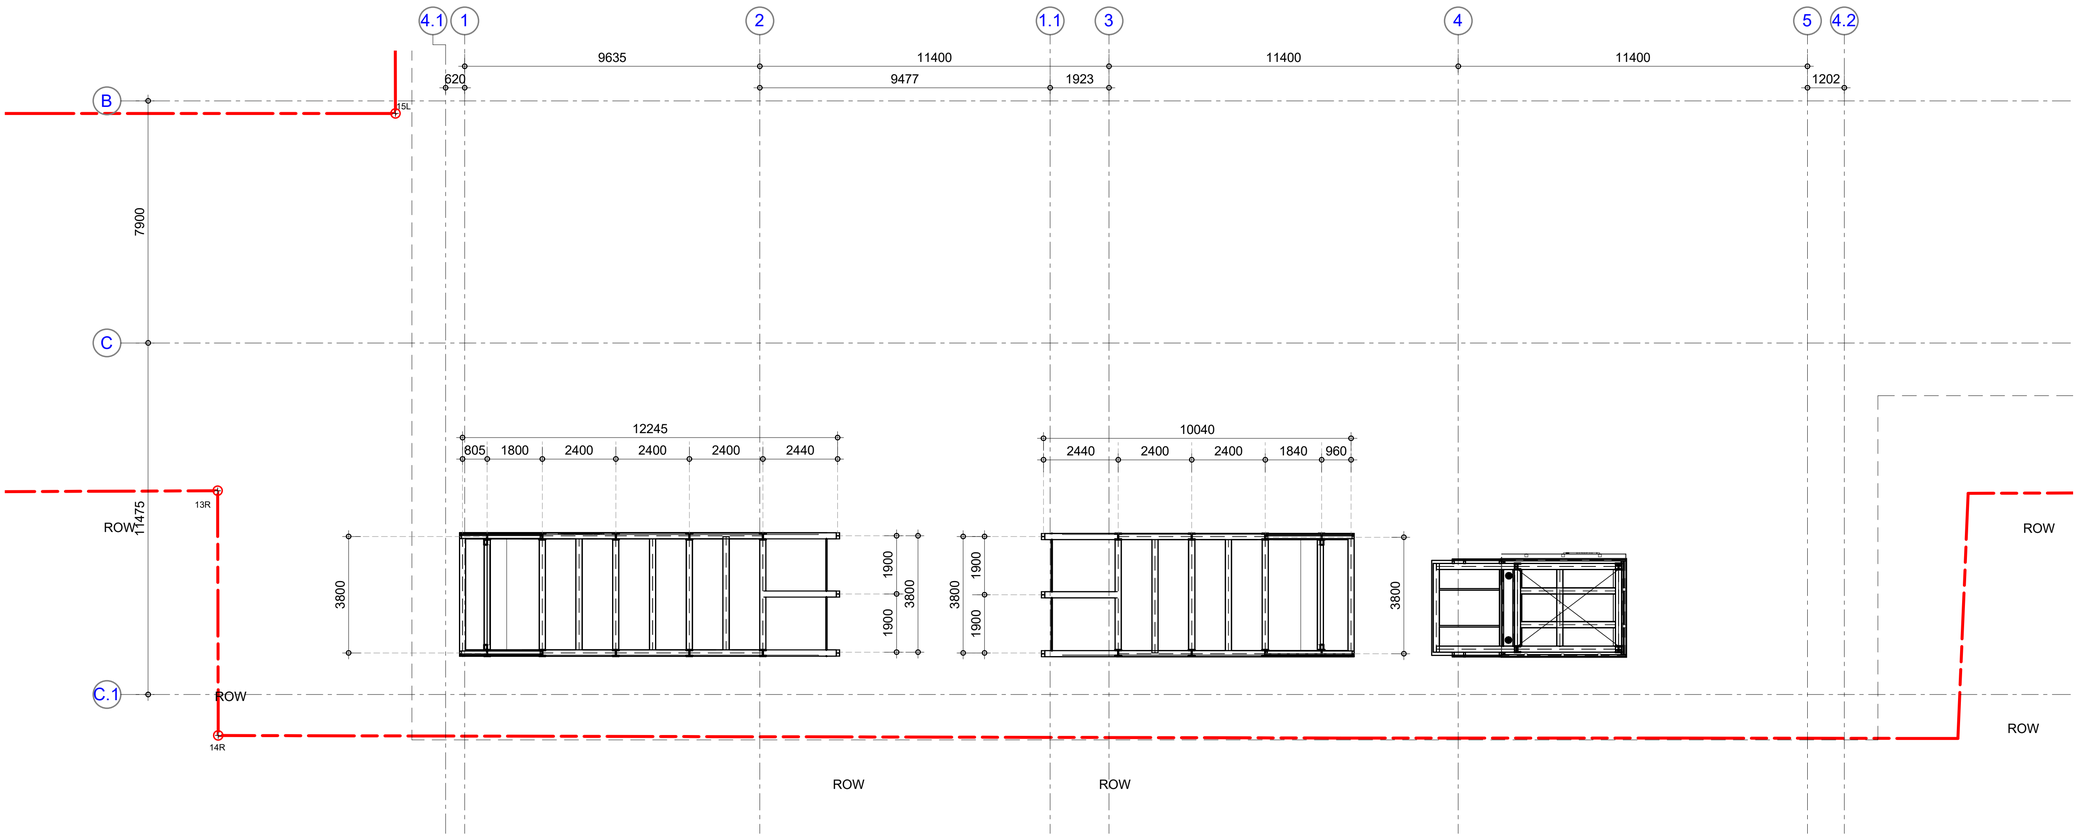

1 / 2120-01 ENLARGED ENTRANCE 4 GROUND LEVEL - REFLECTED CEILING PLAN

SCALE 1 : 100

NOTES :

1. ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2. LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3. DRAWING TO SCALE WHEN PLOTTED AT A1
4. DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5. ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E&M DRAWINGS, CONTRACT DOCUMENTS AND SPECIFICATIONS
6. FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7. DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
8. BLOCKWORK WALLS/ LIGHT WEIGHT CONCRETE PANEL (LPC) WALL TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN
9. FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
10. TO BE READ IN CONJUNCTION WITH SUBM. NO. 1-PROJ-AR-2311-1 & GRAPHIC DESIGN PACKAGE.

LEGENDS :

FLOOR FINISH LEVEL — ROOM NUMBER / ROOM NAME — CEILING TYPE — SKIRTING TYPE — CEILING HEIGHT FROM FFL

F-00	S-00	C-00
+00.000	+0.000	

REFER TO 'OPERATION ROOMS' DETAIL DWG. NO. 1-PP19-AR-5XXX-1

X / PP19-AR-XXXX-01 — REFER TO SUBM. NO. 1-PP19-AR-XXXX-1

X / XXXX — REFER TO SUBM. NO. 1-PROJ-AR-2311-1 & 1-PROJ-AR-2321-1

FINISHES CODE :

CEILINGS

C-00 NO CEILING, EXPOSED CONCRETE
C-01 NO CEILING, ACRYLIC INTERIOR PAINT
C-02 600X600 SOLID ALUMN CEILING PANEL
C-03 600X600 PERFORATED ALUMN CEILING PANEL
C-04 (ADIT) & C-05 (PSD) & C-08 (CONCOURSE/ PLATFORM) 300MM (W) PARTIAL PERFORATED ALUMN CEILING PLANK WITH ACOUSTIC NON-WOVEN BACKING [MIN. 25% FREE AREA] C/W 200MM (W) ALUMN CEILING RUNNER
C-06 SOLID ALUMN CEILING PANEL
C-07 1200MM (W) SOLID ALUMN CEILING PANEL
C-09 300MM (W) SOLID ALUMN CEILING PANEL C/W ALUMN GRID RUNNER
C-10 FEATURE CEILING : 300MM (W) SOLID ALUMN CEILING PANEL WITH PRINTED PATTERN C/W STEPPING CEILING ON 4-SIDE
C-11 1500 MM (W) SOLID ALUMN CEILING PANEL

NOTES:
1. ALL ALUMN WORKS TO BE IN POWDER COATING FINISH, OTHERWISE STATED.

CEILING FINISHES :

- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- SOLID ALUMN CEILING
- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- 300MM (W) ALUMN CEILING WITH PRINTED GRAPHIC
- SOLID ALUMN CEILING
- SOLID ALUMN GRID RUNNERS
- SOLID ALUMN TRIMMING / STEPPING ALUMN CEILING

LEGENDS FOR E&M FIXTURES:


- RECESSED DOWNLIGHT
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ DISFUSSER
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ LOUVRE
- 300x600 DB. RECESSED FLUORESCENT W/ LOUVRE
- RECESSED WALL MOUNT LIGHT
- SURFACED WALL MOUNT LIGHT [L1: ROUND SHAPE, L2: SQUARE SHAPE] (L1)

NOTES:
1. ALL ALUMN CEILING RUNNER TO BE IN 'DARK GREY' COLOUR

- 1200x600 & 600x600 RETURN AIR GRILLE
- 600x600 SUPPLY AIR DIFFUSER
- SMOKE / HEAT DETECTOR
- SPRINKLER HEAD
- LAMP POST
- LAMP POST
- LED STRIP LIGHT
- 1200x200MM SUPPLY / RETURN AIR DIFFUSER

0 1 2 5 10 M.
GRAPHIC SCALE 1:100

KEY PLAN

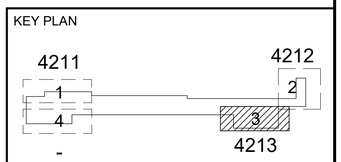

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
PMCSC1
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMSCS1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE
STECON
DESIGNER:
AECOM
TEAM Consulting Engineering and Management Co.,Ltd.
GFE The Geotechnical Expert
SEA-CONSULT ENGINEERING CO.,LTD.

DESIGNER		OYT							
DESIGN CHECKED		AJT							
PROJECT MANAGER		LCC	A	24-01-25	CRD	LCC	OYT	AJT	
			REV.	DATE	REVISIONS	DWG.	CHK.	APP.	


PURPLE LINE PROJECT
CONTRACT 1: UNDERGROUND CIVIL WORKS

SCALE : A1 = 1:100, A3 = 1:200
UNITS : mm.

PP19 : VAJIRA HOSPITAL STATION
ENTRANCE 4 GROUND LEVEL - REFLECTED CEILING PLAN

DATE :	STATUS :	DRAWING NO.	REVISION :	SHEET NO.
24-01-2025	C	1-PP19-AR-4214-01	A	

1/24/2025 4:32:17 PM Autodesk Docs://Purple Line Extension/PPL-C-DPAR-1-PP19-AR-M3-0001.rvt

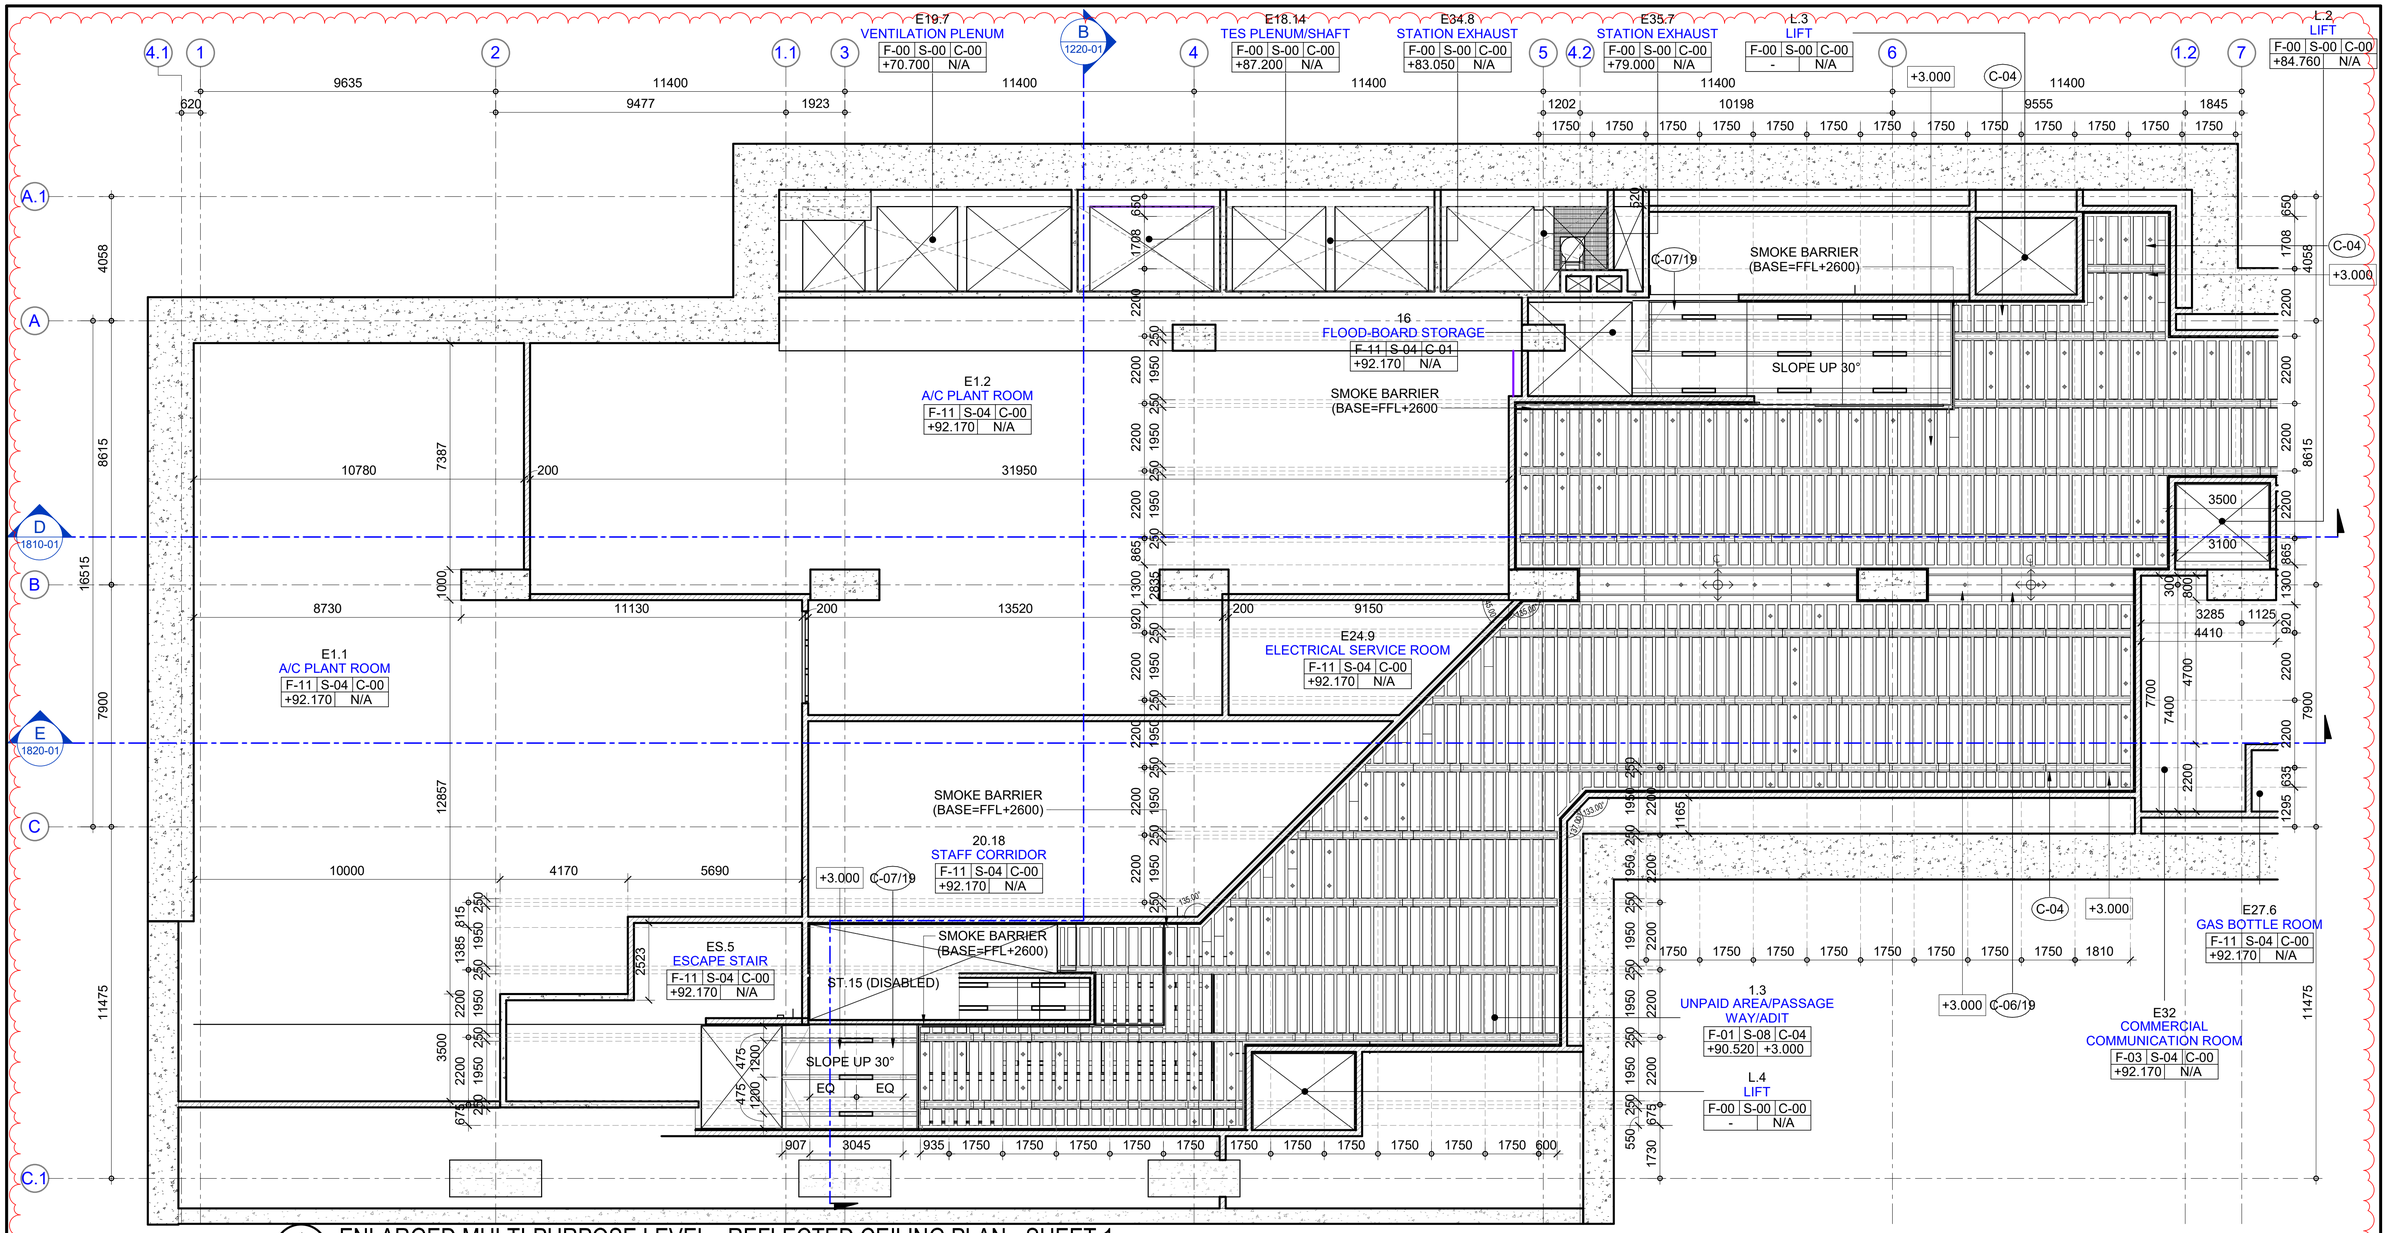

1 ENLARGED MULTI-PURPOSE LEVEL - REFLECTED CEILING PLAN - SHEET 1

SCALE 1 : 100

NOTES :

1. ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2. LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3. DRAWING TO SCALE WHEN PLOTTED AT A1
4. DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5. ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E&M DRAWINGS, CONTRACT DOCUMENTS AND SPECIFICATIONS
6. FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7. DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
8. BLOCKWORK WALLS/ LIGHT WEIGHT CONCRETE PANEL (LPC) WALL TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN
9. FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
10. TO BE READ IN CONJUNCTION WITH SUBM. NO. 1-PROJ-AR-2311-1 & GRAPHIC DESIGN PACKAGE.

LEGENDS :

FLOOR FINISH LEVEL — ROOM NUMBER / ROOM NAME — CEILING TYPE — SKIRTING TYPE — CEILING HEIGHT FROM FFL

F-00 S-00 C-00
+00.000 +0.000

REFER TO 'OPERATION ROOMS' DETAIL DWG. NO. 1-PP19-AR-5XXX-1

X / PP19-AR-XXXX-01 — REFER TO SUBM. NO. 1-PP19-AR-XXXX-1

X / XXXX — REFER TO SUBM. NO. 1-PROJ-AR-2311-1 & 1-PROJ-AR-2321-1

FINISHES CODE :

CEILINGS

- **C-00** NO CEILING, EXPOSED CONCRETE
- **C-01** NO CEILING, ACRYLIC INTERIOR PAINT
- **C-02** 600X600 SOLID ALUMN CEILING PANEL
- **C-03** 600X600 PERFORATED ALUMN CEILING PANEL
- **C-04** (ADIT) & C-05 (PSD) & C-08 (CONCOURSE/ PLATFORM) 300MM (W) PARTIAL PERFORATED ALUMN CEILING PLANK WITH ACOUSTIC NON-WOVEN BACKING [MIN. 25% FREE AREA] C/W 200MM (W) ALUMN CEILING RUNNER
- **C-06** SOLID ALUMN CEILING PANEL
- **C-07** 1200MM (W) SOLID ALUMN CEILING PANEL
- **C-09** 300MM (W) SOLID ALUMN CEILING PANEL C/W ALUMN GRID RUNNER
- **C-10** FEATURE CEILING : 300MM (W) SOLID ALUMN CEILING PANEL WITH PRINTED PATTERN C/W STEPPING CEILING ON 4-SIDE
- **C-11** 1500 MM (W) SOLID ALUMN CEILING PANEL

NOTES:
1. ALL ALUMN WORKS TO BE IN POWDER COATING FINISH, OTHERWISE STATED.

CEILING FINISHES :

- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- SOLID ALUMN CEILING
- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- 300MM (W) ALUMN CEILING WITH PRINTED GRAPHIC
- SOLID ALUMN CEILING
- SOLID ALUMN GRID RUNNERS
- SOLID ALUMN TRIMMING / STEPPING ALUMN CEILING


LEGENDS FOR E&M FIXTURES:

- RECESSED DOWNLIGHT
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ DISFUSSER
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ LOUVRE
- 300x600 DB. RECESSED FLUORESCENT W/ LOUVRE
- RECESSED WALL MOUNT LIGHT
- SURFACED WALL MOUNT LIGHT [L1: ROUND SHAPE, L2: SQUARE SHAPE] (L1)
- 1200x600 & 600x600 RETURN AIR GRILLE
- 600x600 SUPPLY AIR DIFFUSER
- 1200x200MM SUPPLY / RETURN AIR DIFFUSER
- SMOKE / HEAT DETECTOR
- SPRINKLER HEAD
- LAMP POST
- LAMP POST
- LED STRIP LIGHT

NOTES:
1. ALL ALUMN CEILING RUNNER TO BE IN 'DARK GREY' COLOUR

GRAPHIC SCALE 0 1 2 5 10 M. — 1:100

KEY PLAN

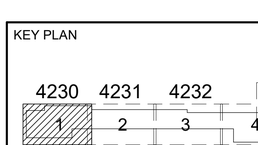

B

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
PMCSC1
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMSCS1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE
STECON
DESIGNER: AECOM
TEAM Consulting Engineering and Management Co.,Ltd.
GFE The Geotechnical Expert
SEA-CONSULT ENGINEERING CO.,LTD.

DESIGNER		OYT
DESIGN CHECKED		AJT
PROJECT MANAGER		LCC

REV.	DATE	REVISIONS	DWG.	CHK.	APP.
B	24-01-25	CRD UPDATED	LCC	OYT	AJT
A	19-04-24	CRD	LCC	OYT	AJT

PURPLE LINE PROJECT

CONTRACT 1: UNDERGROUND CIVIL WORKS

SCALE : A1 = 1:100, A3 = 1:200


UNITS : mm.

DATE : 19-04-2024

PP19 : VAJIRA HOSPITAL STATION
MULTI-PURPOSE LEVEL - REFLECTED CEILING PLAN
SHEET 1

STATUS :	DRAWING NO.	REVISION :	SHEET NO.
C	1-PP19-AR-4230-01	B	

1/24/2025 11:29:57 AM Autodesk Docs://Purple Line Extension/PPL_C_DPAR_1_PP19_AR_M3_0001.rvt

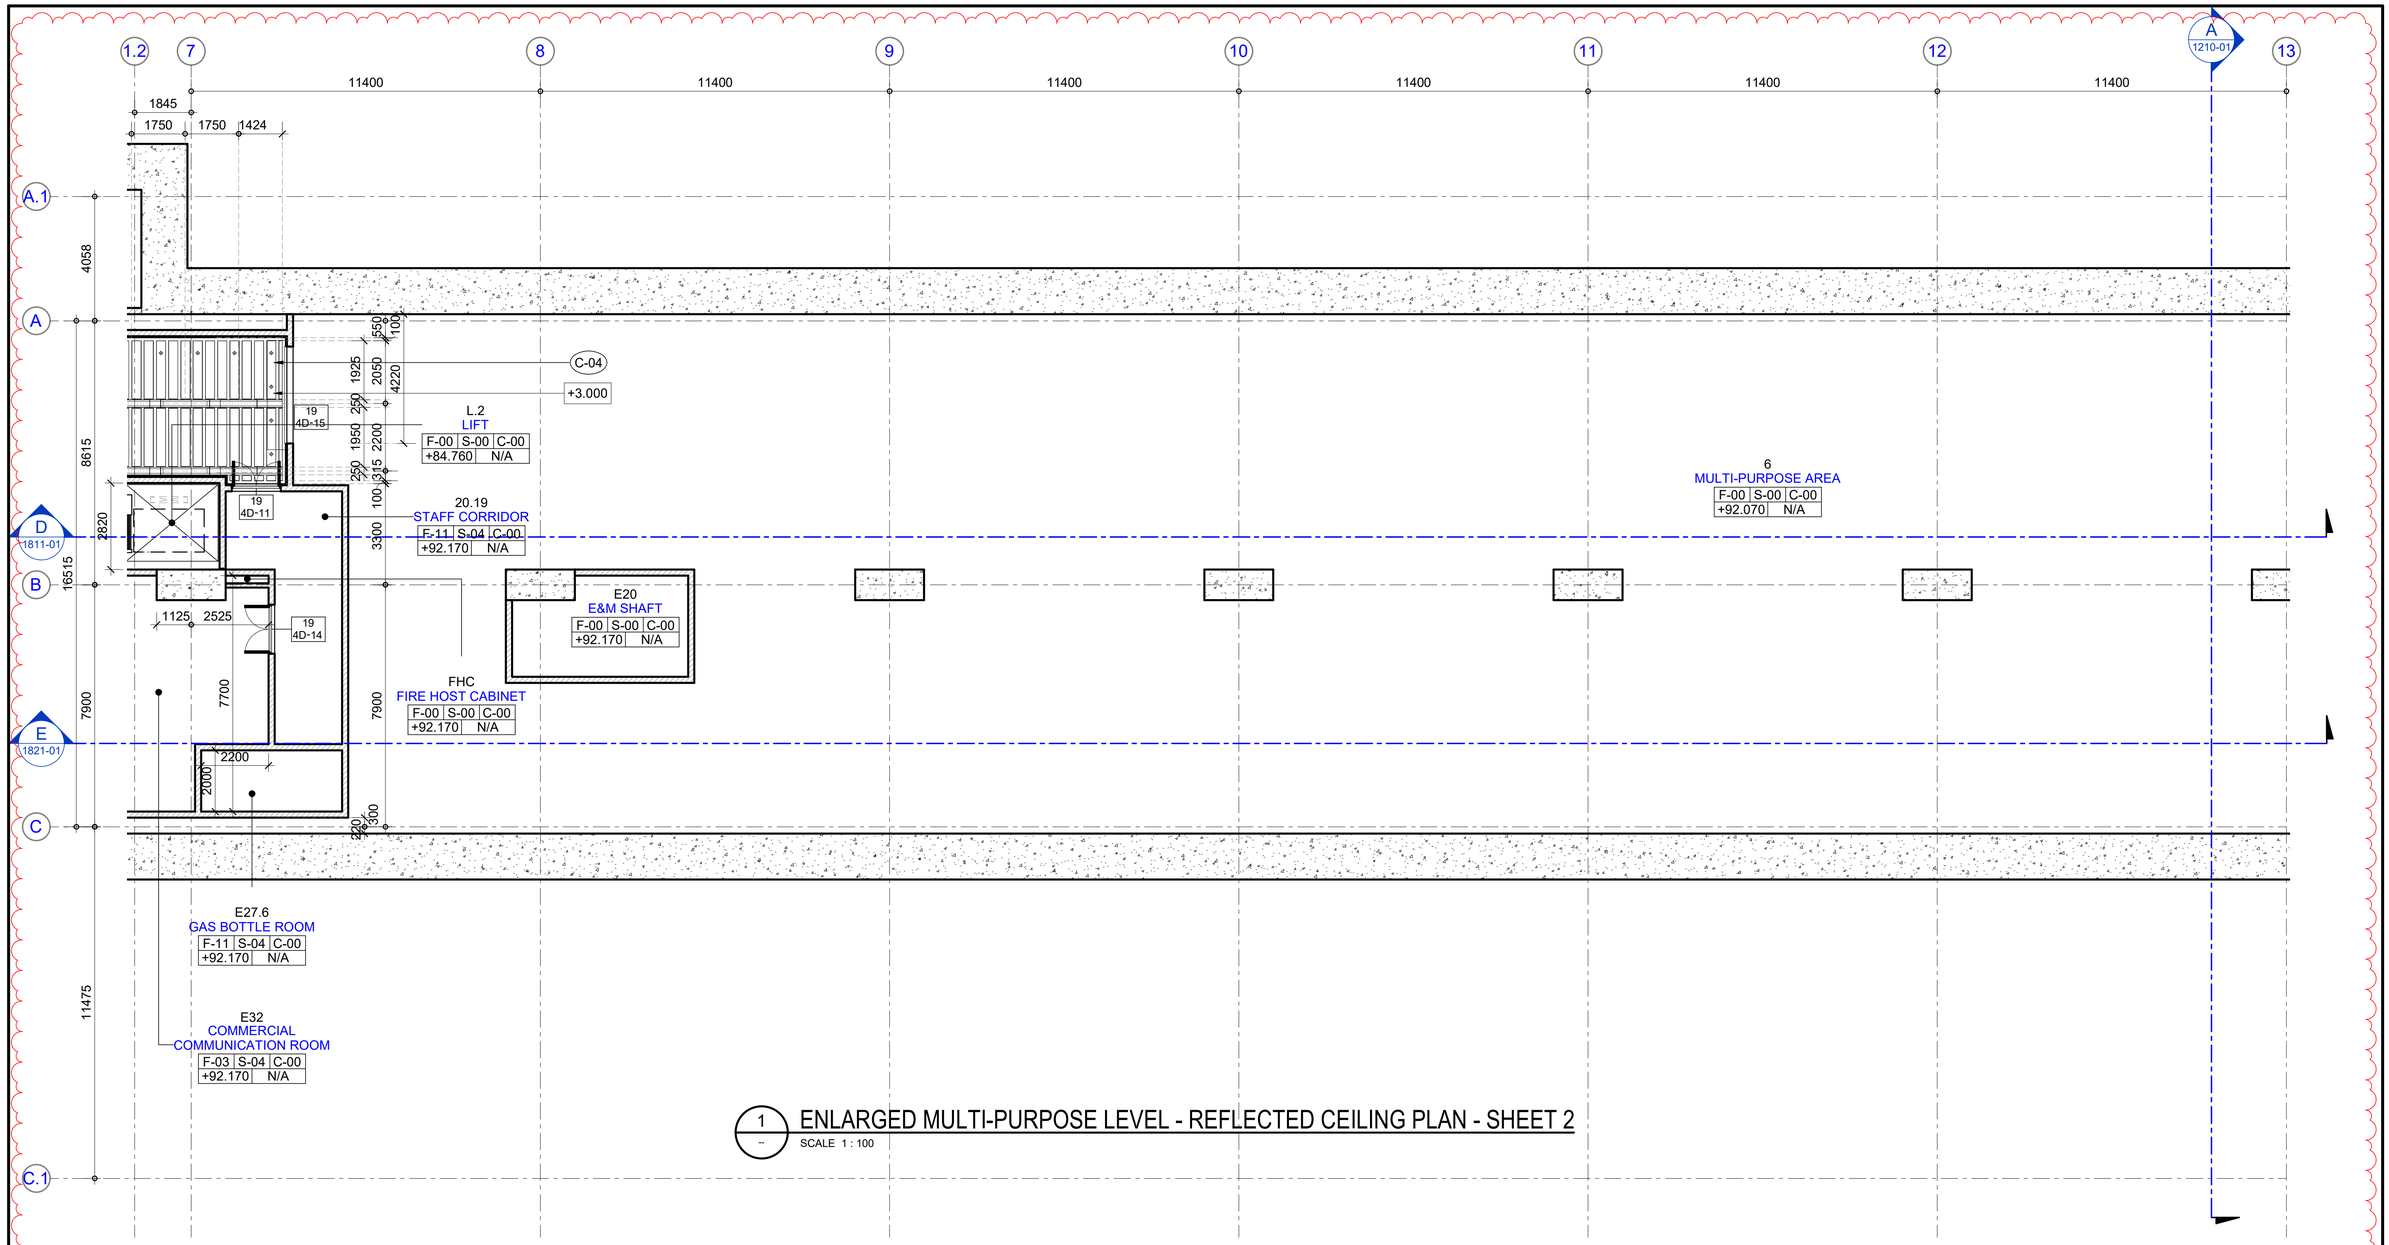

1 ENLARGED MULTI-PURPOSE LEVEL - REFLECTED CEILING PLAN - SHEET 2

SCALE 1 : 100

NOTES :

1. ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2. LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3. DRAWING TO SCALE WHEN PLOTTED AT A1
4. DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5. ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E&M DRAWINGS, CONTRACT DOCUMENTS AND SPECIFICATIONS
6. FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7. DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
8. BLOCKWORK WALLS/ LIGHT WEIGHT CONCRETE PANEL (LPC) WALL TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN
9. FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
10. TO BE READ IN CONJUNCTION WITH SUBM. NO. 1-PROJ-AR-2311-1 & GRAPHIC DESIGN PACKAGE.

LEGENDS :

FLOOR FINISH NUMBER — ROOM NUMBER — ROOM NAME — CEILING TYPE — SKIRTING TYPE — CEILING HEIGHT FROM FFL — FINISHED FLOOR LEVEL

F-00 S-00 C-00
+00.000 +0.000

REFER TO 'OPERATION ROOMS' DETAIL DWG. NO. 1-PP19-AR-5XXX-1

X / PP19-AR-XXXX-01 — REFER TO SUBM. NO. 1-PP19-AR-XXXX-1

X / XXXX — REFER TO SUBM. NO. 1-PROJ-AR-2311-1 & 1-PROJ-AR-2321-1

FINISHES CODE :

CEILINGS

C-00 NO CEILING, EXPOSED CONCRETE
C-01 NO CEILING, ACRYLIC INTERIOR PAINT
C-02 600X600 SOLID ALUMN CEILING PANEL
C-03 600X600 PERFORATED ALUMN CEILING PANEL
C-04 (ADIT) & C-05 (PSD) & C-08 (CONCOURSE/ PLATFORM) 300MM (W) PARTIAL PERFORATED ALUMN CEILING PLANK WITH ACOUSTIC NON-WOVEN BACKING [MIN. 25% FREE AREA] C/W 200MM (W) ALUMN CEILING RUNNER
C-06 SOLID ALUMN CEILING PANEL
C-07 1200MM (W) SOLID ALUMN CEILING PANEL
C-09 300MM (W) SOLID ALUMN CEILING PANEL C/W ALUMN GRID RUNNER
C-10 FEATURE CEILING : 300MM (W) SOLID ALUMN CEILING PANEL WITH PRINTED PATTERN C/W STEPPING CEILING ON 4-SIDE
C-11 1500 MM (W) SOLID ALUMN CEILING PANEL

NOTES:
1. ALL ALUMN WORKS TO BE IN POWDER COATING FINISH, OTHERWISE STATED.

CEILING FINISHES :

- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- SOLID ALUMN CEILING
- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- 300MM (W) ALUMN CEILING WITH PRINTED GRAPHIC
- SOLID ALUMN CEILING
- SOLID ALUMN GRID RUNNERS
- SOLID ALUMN TRIMMING / STEPPING ALUMN CEILING


LEGENDS FOR E&M FIXTURES:

- RECESSED DOWNLIGHT
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ DISFUSSER
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ LOUVRE
- 300x600 DB. RECESSED FLUORESCENT W/ LOUVRE
- RECESSED WALL MOUNT LIGHT
- SURFACED WALL MOUNT LIGHT [L1: ROUND SHAPE, L2: SQUARE SHAPE] (L1)
- 1200x600 & 600x600 RETURN AIR GRILLE
- 1200x200MM SUPPLY / RETURN AIR DIFFUSER
- 600x600 SUPPLY AIR DIFFUSER
- SMOKE / HEAT DETECTOR
- SPRINKLER HEAD
- LAMP POST
- LAMP POST
- LED STRIP LIGHT

NOTES:
1. ALL ALUMN CEILING RUNNER TO BE IN 'DARK GREY' COLOUR

0 1 2 5 10 M.
GRAPHIC SCALE 1:100

KEY PLAN

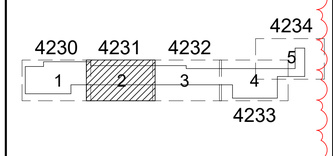

B

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMSCS1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE
DESIGNER: AECOM, TEAM Consulting Engineering and Management Co.,Ltd., GFE The Geotechnical Expert, SEA-CONSULT ENGINEERING CO.,LTD.

DESIGNER		OYT
DESIGN CHECKED		AJT
PROJECT MANAGER		LCC

REV.	DATE	REVISIONS	DWG.	CHK.	APP.
B	24-01-25	CRD UPDATED	LCC	OYT	AJT
A	19-04-24	CRD	LCC	OYT	AJT


PURPLE LINE PROJECT
CONTRACT 1: UNDERGROUND CIVIL WORKS

SCALE : A1 = 1:100, A3 = 1:200
UNITS : mm.
DATE : 19-04-2024

PP19 : VAJIRA HOSPITAL STATION
MULTI-PURPOSE LEVEL - REFLECTED CEILING PLAN
SHEET 2

STATUS :	DRAWING NO.	REVISION :	SHEET NO.
C	1-PP19-AR-4231-01	B	

1/24/2025 4:32:29 PM Autodesk Docs://Purple Line Extension/PPL-C-DPAR-1-PP19-AR-M3-0001.rvt

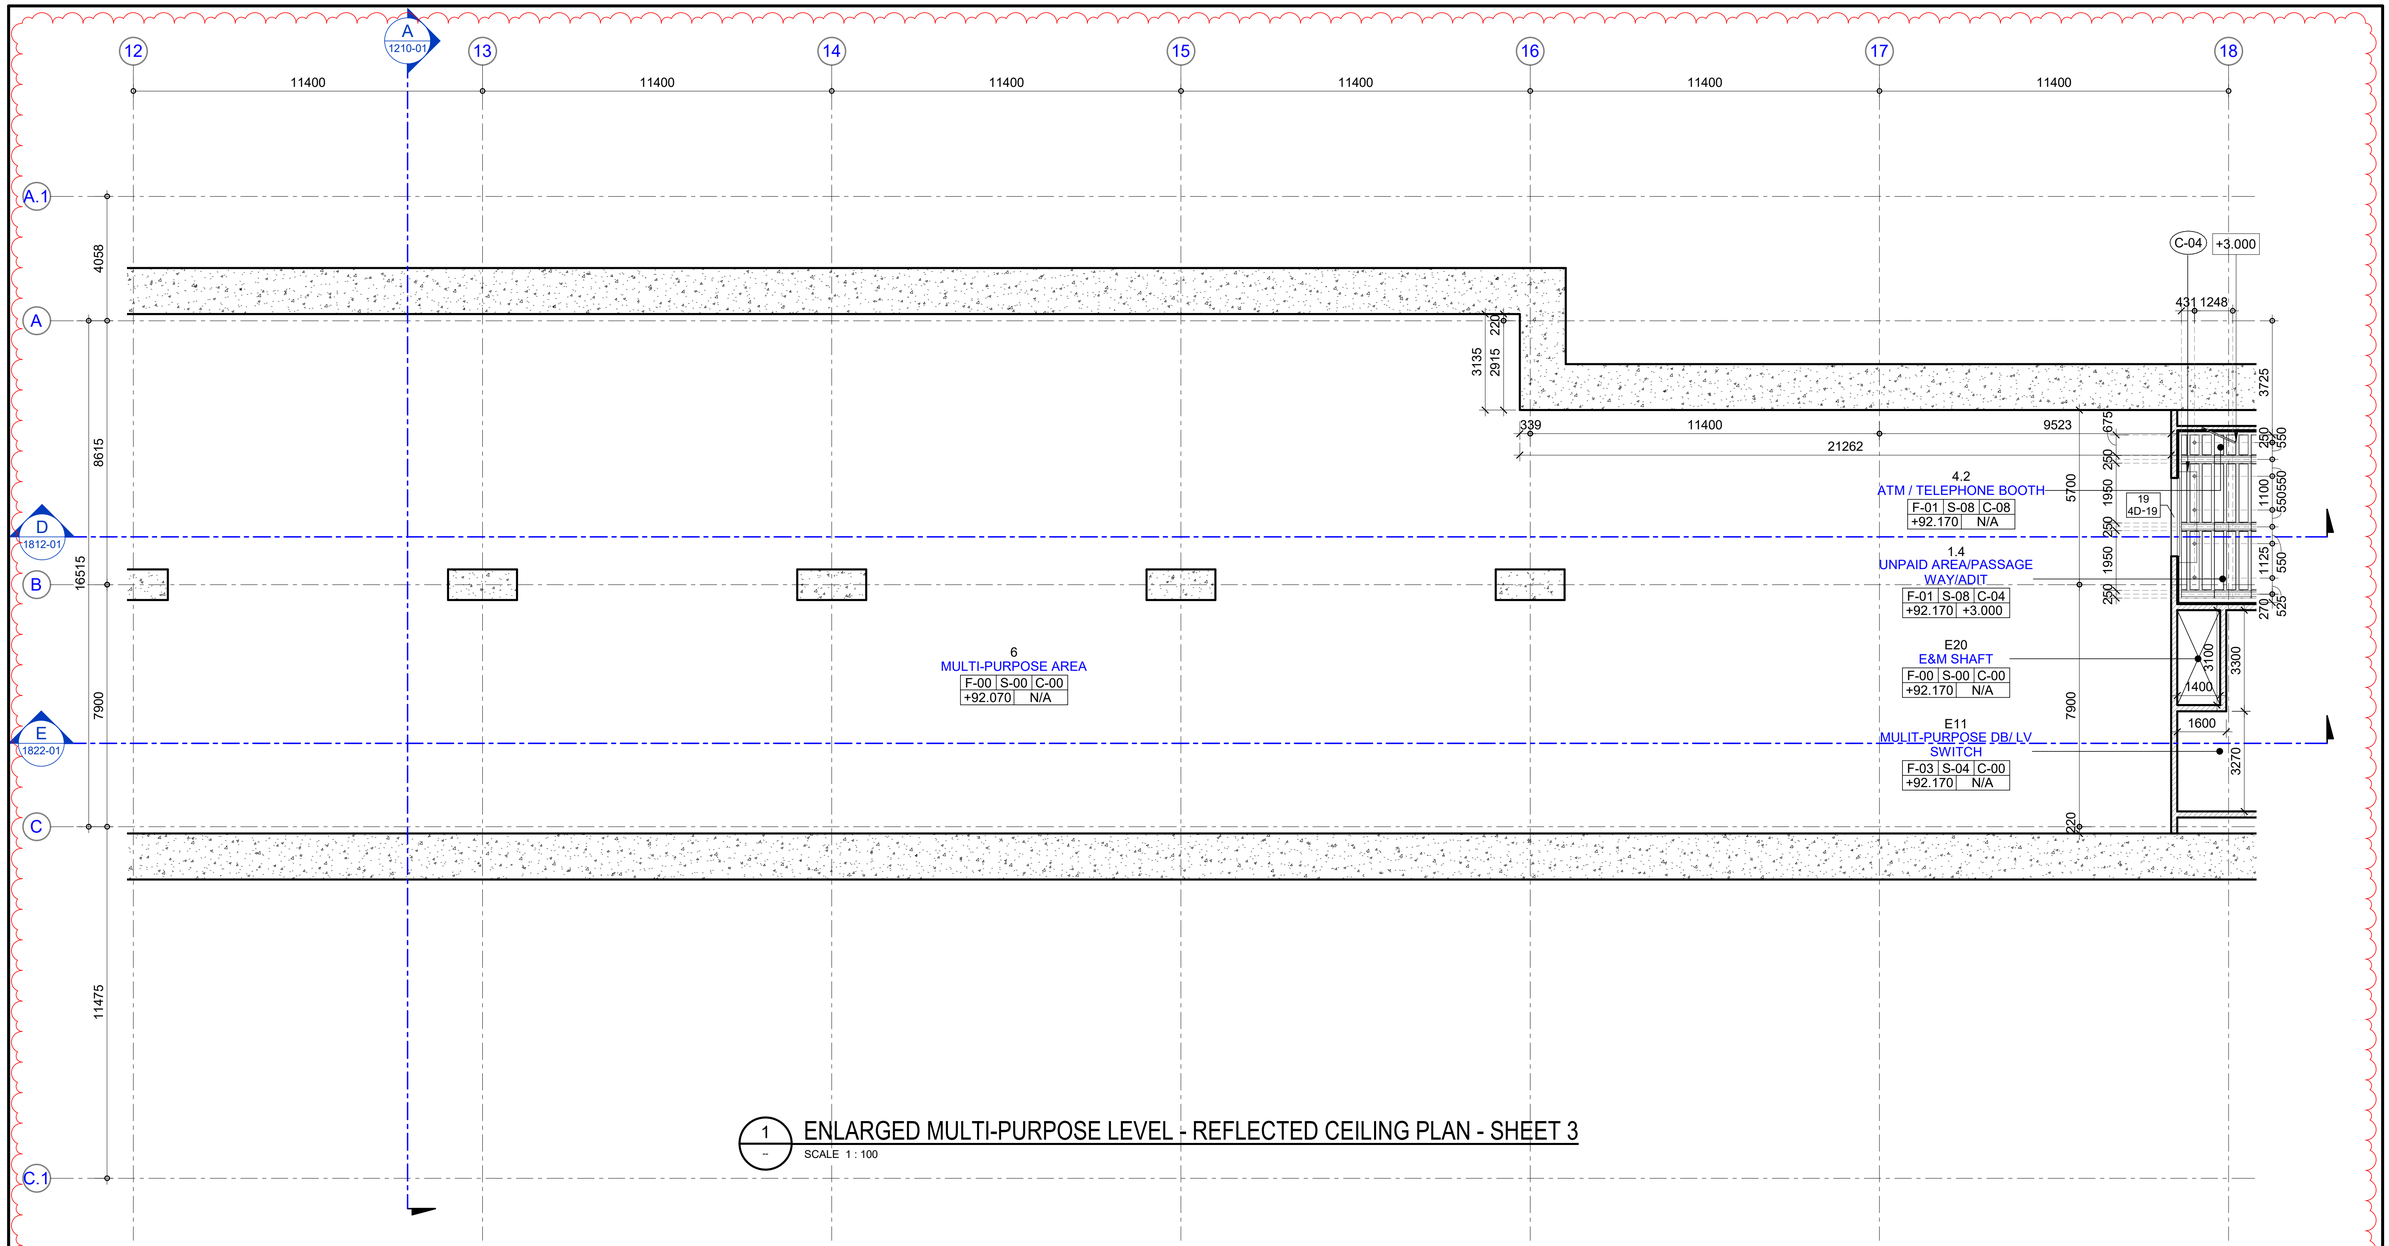

1 ENLARGED MULTI-PURPOSE LEVEL - REFLECTED CEILING PLAN - SHEET 3

SCALE 1 : 100

NOTES :

1. ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2. LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3. DRAWING TO SCALE WHEN PLOTTED AT A1
4. DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5. ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E&M DRAWINGS, CONTRACT DOCUMENTS AND SPECIFICATIONS
6. FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7. DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
8. BLOCKWORK WALLS/ LIGHT WEIGHT CONCRETE PANEL (LPC) WALL TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN
9. FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
10. TO BE READ IN CONJUNCTION WITH SUBM. NO. 1-PROJ-AR-2311-1 & GRAPHIC DESIGN PACKAGE.

LEGENDS :

FLOOR FINISH NUMBER / ROOM NUMBER / ROOM NAME — CEILING TYPE

F-00 S-00 C-00 — SKIRTING TYPE

+00.000 +0.000 — CEILING HEIGHT FROM FFL

FINISHED FLOOR LEVEL

REFER TO 'OPERATION ROOMS' DETAIL DWG. NO. 1-PP19-AR-5XXX-1

X / PP19-AR-XXXX-01 — REFER TO SUBM. NO. 1-PP19-AR-XXXX-1

X / XXXX — REFER TO SUBM. NO. 1-PROJ-AR-2311-1 & 1-PROJ-AR-2321-1

FINISHES CODE :

CEILINGS

C-00 NO CEILING, EXPOSED CONCRETE
C-01 NO CEILING, ACRYLIC INTERIOR PAINT
C-02 600X600 SOLID ALUMN CEILING PANEL
C-03 600X600 PERFORATED ALUMN CEILING PANEL
C-04 (ADIT) & C-05 (PSD) & C-08 (CONCOURSE/ PLATFORM) 300MM (W) PARTIAL PERFORATED ALUMN CEILING PLANK WITH ACOUSTIC NON-WOVEN BACKING [MIN. 25% FREE AREA] C/W 200MM (W) ALUMN CEILING RUNNER
C-06 SOLID ALUMN CEILING PANEL
C-07 1200MM (W) SOLID ALUMN CEILING PANEL
C-09 300MM (W) SOLID ALUMN CEILING PANEL C/W ALUMN GRID RUNNER
C-10 FEATURE CEILING : 300MM (W) SOLID ALUMN CEILING PANEL WITH PRINTED PATTERN C/W STEPPING CEILING ON 4-SIDE
C-11 1500 MM (W) SOLID ALUMN CEILING PANEL

NOTES:
1. ALL ALUMN WORKS TO BE IN POWDER COATING FINISH, OTHERWISE STATED.

CEILING FINISHES :

- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- SOLID ALUMN CEILING
- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- 300MM (W) ALUMN CEILING WITH PRINTED GRAPHIC
- SOLID ALUMN CEILING
- SOLID ALUMN GRID RUNNERS
- SOLID ALUMN TRIMMING / STEPPING ALUMN CEILING

LEGENDS FOR E&M FIXTURES:


- RECESSED DOWNLIGHT
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ DISFUSSER
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ LOUVRE
- 300x600 DB. RECESSED FLUORESCENT W/ LOUVRE
- RECESSED WALL MOUNT LIGHT
- SURFACED WALL MOUNT LIGHT [L1: ROUND SHAPE, L2: SQUARE SHAPE] (L1)
- 1200x600 & 600x600 RETURN AIR GRILLE
- 600x600 SUPPLY AIR DIFFUSER
- SMOKE / HEAT DETECTOR
- SPRINKLER HEAD
- LAMP POST
- LAMP POST
- LED STRIP LIGHT
- 1200x200MM SUPPLY / RETURN AIR DIFFUSER

NOTES:
1. ALL ALUMN CEILING RUNNER TO BE IN 'DARK GREY' COLOUR

B

0 1 2 5 10 M.
GRAPHIC SCALE 1:100

KEY PLAN

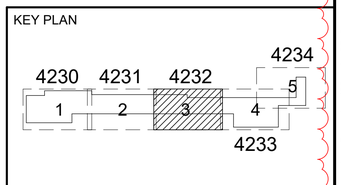

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
PMCSC1
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMSCS1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE
STECON

DESIGNER: AECOM
TEAM Consulting Engineering and Management Co.,Ltd.
GFE The Geotechnical Expert

DESIGNER		OYT
DESIGN CHECKED		AJT
PROJECT MANAGER		LCC

REV.	DATE	REVISIONS	DWG.	CHK.	APP.
B	24-01-25	CRD UPDATED	LCC	OYT	AJT
A	19-04-24	CRD	LCC	OYT	AJT


PURPLE LINE PROJECT
CONTRACT 1: UNDERGROUND CIVIL WORKS

SCALE : A1 = 1:100, A3 = 1:200
UNITS : mm.
DATE : 19-04-2024

PP19 : VAJIRA HOSPITAL STATION
MULTI-PURPOSE LEVEL - REFLECTED CEILING PLAN
SHEET 3

STATUS :	DRAWING NO.	REVISION :	SHEET NO.
C	1-PP19-AR-4232-01	B	

1/24/2025 11:30:35 AM Autodesk Docs://Purple Line Extension/PPL-C-DPAR-1-PP19-AR-M3-0001.rvt

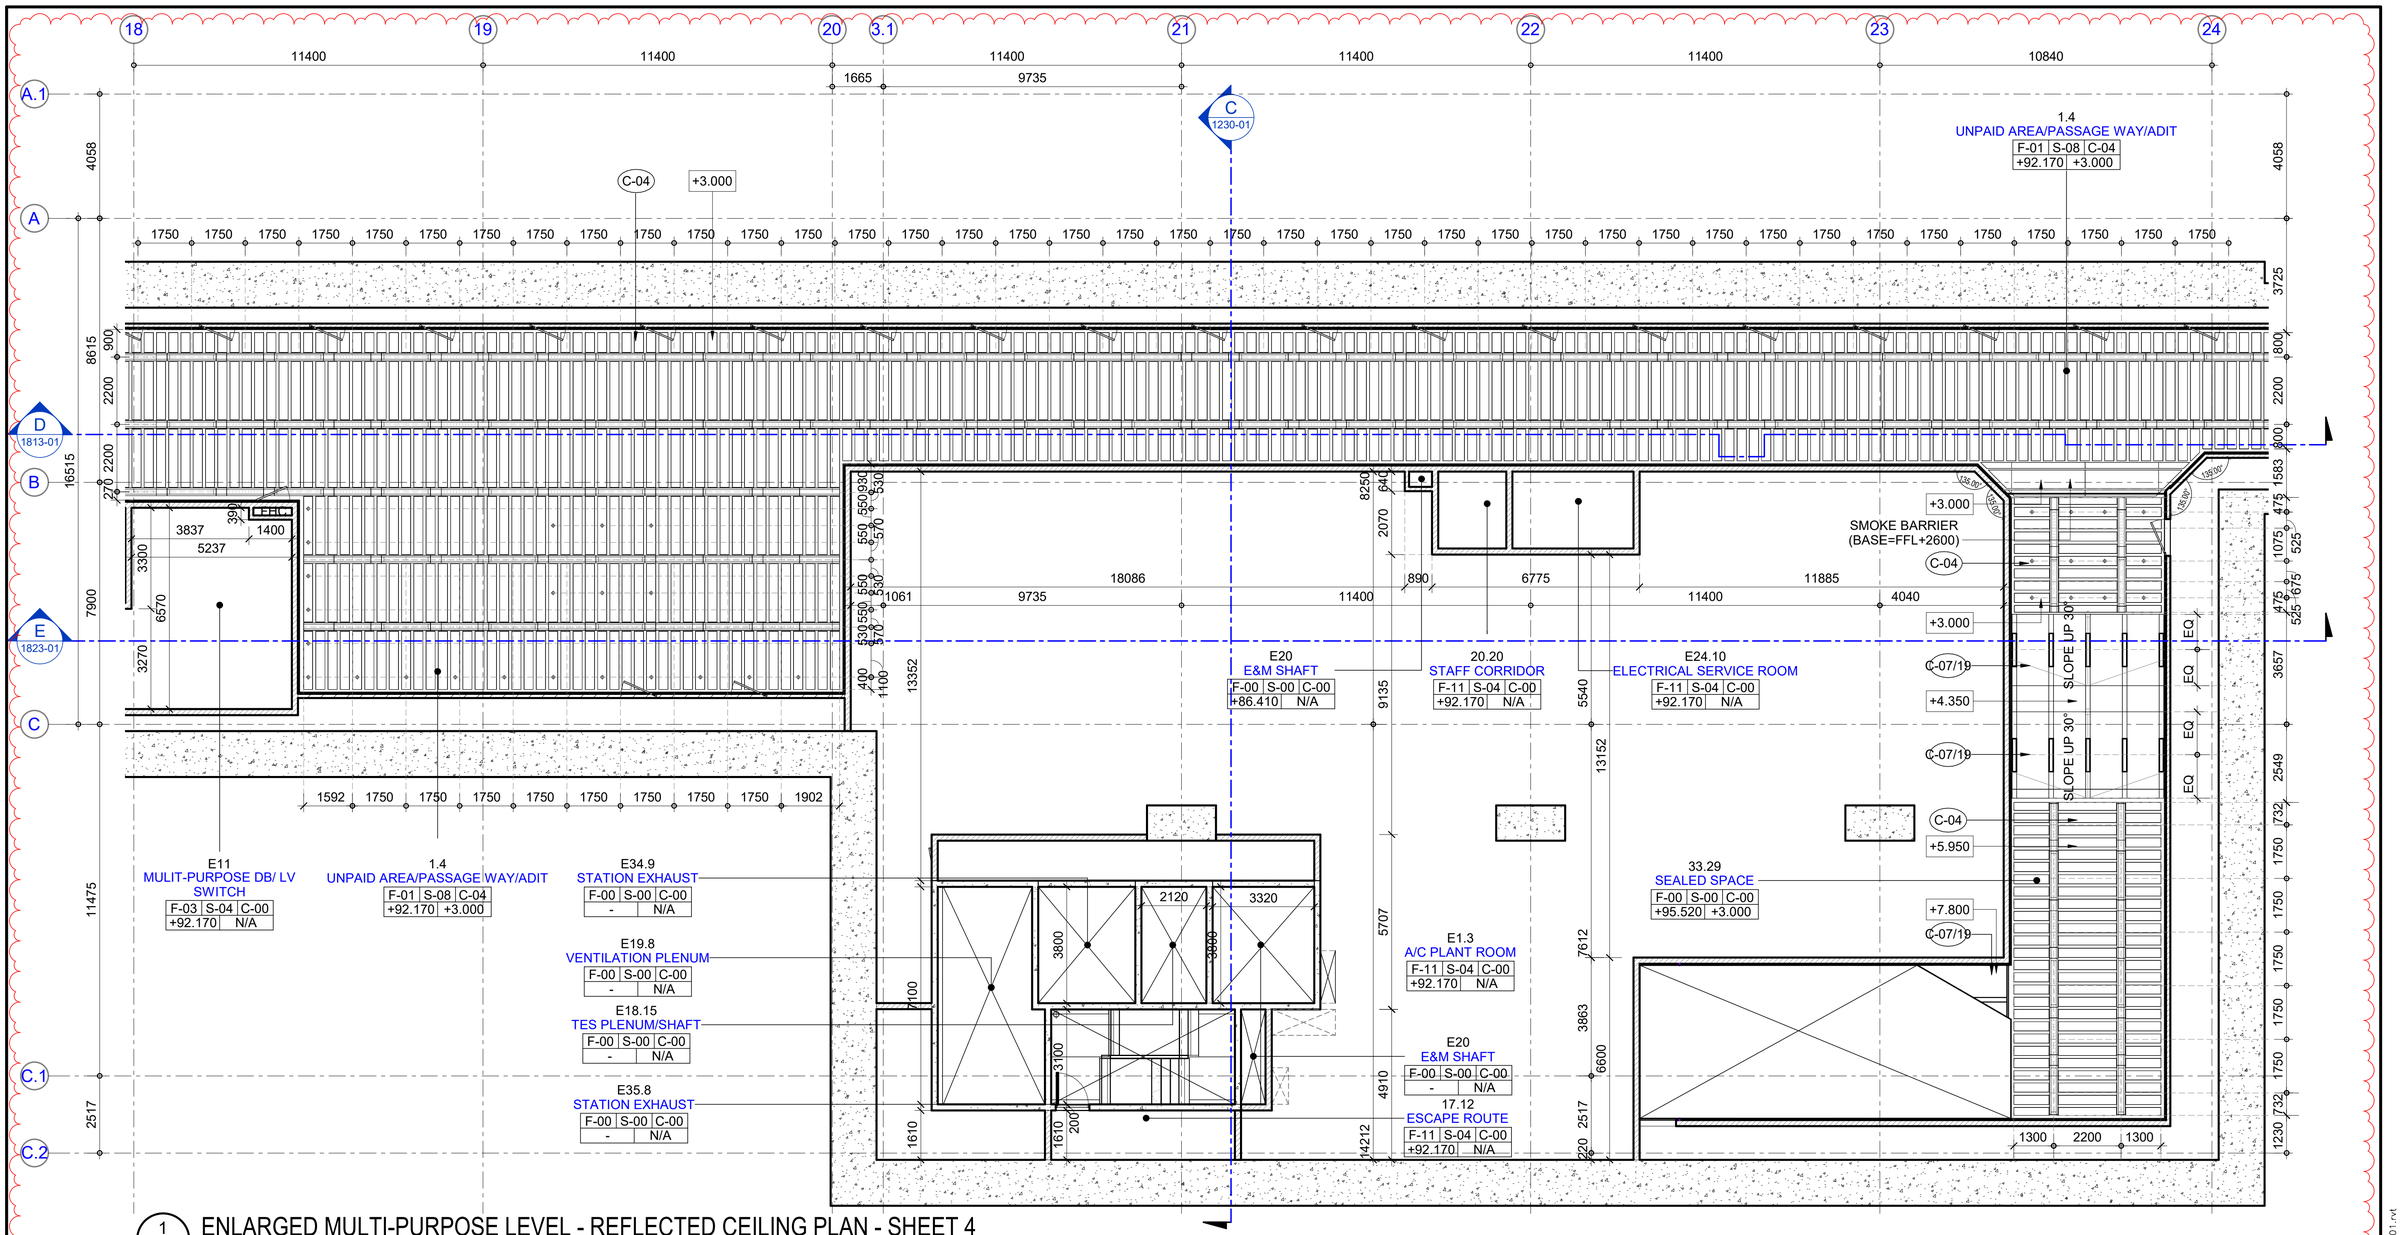

1 SCALE 1 : 100

ENLARGED MULTI-PURPOSE LEVEL - REFLECTED CEILING PLAN - SHEET 4

NOTES :

1. ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2. LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3. DRAWING TO SCALE WHEN PLOTTED AT A1
4. DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5. ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E&M DRAWINGS, CONTRACT DOCUMENTS AND SPECIFICATIONS
6. FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7. DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
8. BLOCKWORK WALLS/ LIGHT WEIGHT CONCRETE PANEL (LPC) WALL TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN
9. FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
10. TO BE READ IN CONJUNCTION WITH SUBM. NO. 1-PROJ-AR-2311-1 & GRAPHIC DESIGN PACKAGE.

LEGENDS :

FLOOR FINISH NUMBER — ROOM NUMBER / ROOM NAME — CEILING TYPE

F-00 S-00 C-00 — SKIRTING TYPE

+00.000 +0.000 — CEILING HEIGHT FROM FFL

FINISHED FLOOR LEVEL

REFER TO 'OPERATION ROOMS' DETAIL DWG. NO. 1-PP19-AR-5XXX-1

X PP19-AR-XXXX-01 REFER TO SUBM. NO. 1-PP19-AR-XXXX-1

X XXXX REFER TO SUBM. NO. 1-PROJ-AR-2311-1 & 1-PROJ-AR-2321-1

FINISHES CODE :

CEILINGS

C-00 NO CEILING, EXPOSED CONCRETE
C-01 NO CEILING, ACRYLIC INTERIOR PAINT
C-02 600X600 SOLID ALUMN CEILING PANEL
C-03 600X600 PERFORATED ALUMN CEILING PANEL
C-04 (ADIT) & C-05 (PSD) & C-08 (CONCOURSE/ PLATFORM) 300MM (W) PARTIAL PERFORATED ALUMN CEILING PLANK WITH ACOUSTIC NON-WOVEN BACKING [MIN. 25% FREE AREA] C/W 200MM (W) ALUMN CEILING RUNNER
C-06 SOLID ALUMN CEILING PANEL
C-07 1200MM (W) SOLID ALUMN CEILING PANEL
C-09 300MM (W) SOLID ALUMN CEILING PANEL C/W ALUMN GRID RUNNER
C-10 FEATURE CEILING : 300MM (W) SOLID ALUMN CEILING PANEL WITH PRINTED PATTERN C/W STEPPING CEILING ON 4-SIDE
C-11 1500 MM (W) SOLID ALUMN CEILING PANEL

NOTES:
1. ALL ALUMN WORKS TO BE IN POWDER COATING FINISH, OTHERWISE STATED.

CEILING FINISHES :

- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- SOLID ALUMN CEILING
- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- 300MM (W) ALUMN CEILING WITH PRINTED GRAPHIC
- SOLID ALUMN CEILING
- SOLID ALUMN GRID RUNNERS
- SOLID ALUMN TRIMMING / STEPPING ALUMN CEILING


NOTES:
1. ALL ALUMN CEILING RUNNER TO BE IN 'DARK GREY' COLOUR

LEGENDS FOR E&M FIXTURES:

- RECESSED DOWNLIGHT
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ DISFUSSER
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ LOUVRE
- 300x600 DB. RECESSED FLUORESCENT W/ LOUVRE
- RECESSED WALL MOUNT LIGHT
- SURFACED WALL MOUNT LIGHT [L1: ROUND SHAPE, L2: SQUARE SHAPE] (L1)
- 1200x600 & 600x600 RETURN AIR GRILLE
- 600x600 SUPPLY AIR DIFFUSER
- SMOKE / HEAT DETECTOR
- SPRINKLER HEAD
- LAMP POST
- LAMP POST
- LED STRIP LIGHT
- 1200x200MM SUPPLY / RETURN AIR DIFFUSER

0 1 2 5 10 M.
GRAPHIC SCALE 1:100

KEY PLAN

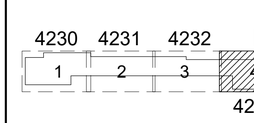

B

PURPLE LINE PROJECT

CONTRACT 1: UNDERGROUND CIVIL WORKS

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
PMCSC1
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMSCS1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE

DESIGNER: AECOM
TEAM Consulting Engineering and Management Co.,Ltd.
GFE The Geotechnical Expert
SEA-CONSULT ENGINEERING CO.,LTD.

DESIGNER		OYT
DESIGN CHECKED	ATT.	AJT
PROJECT MANAGER		LCC


REV.	DATE	REVISIONS	DWG.	CHK.	APP.
B	24-01-25	CRD UPDATED	LCC	OYT	AJT
A	19-04-24	CRD	LCC	OYT	AJT

SCALE : A1 = 1:100, A3 = 1:200
UNITS : mm.
DATE : 19-04-2024

PP19 : VAJIRA HOSPITAL STATION
MULTI-PURPOSE LEVEL - REFLECTED CEILING PLAN
SHEET 4

STATUS :	DRAWING NO.	REVISION :	SHEET NO.
C	1-PP19-AR-4233-01	B	

1/24/2025 11:30:51 AM Autodesk Docs://Purple Line Extension/PPL-C-DPAR-1-PP19-AR-M3-0001.rvt

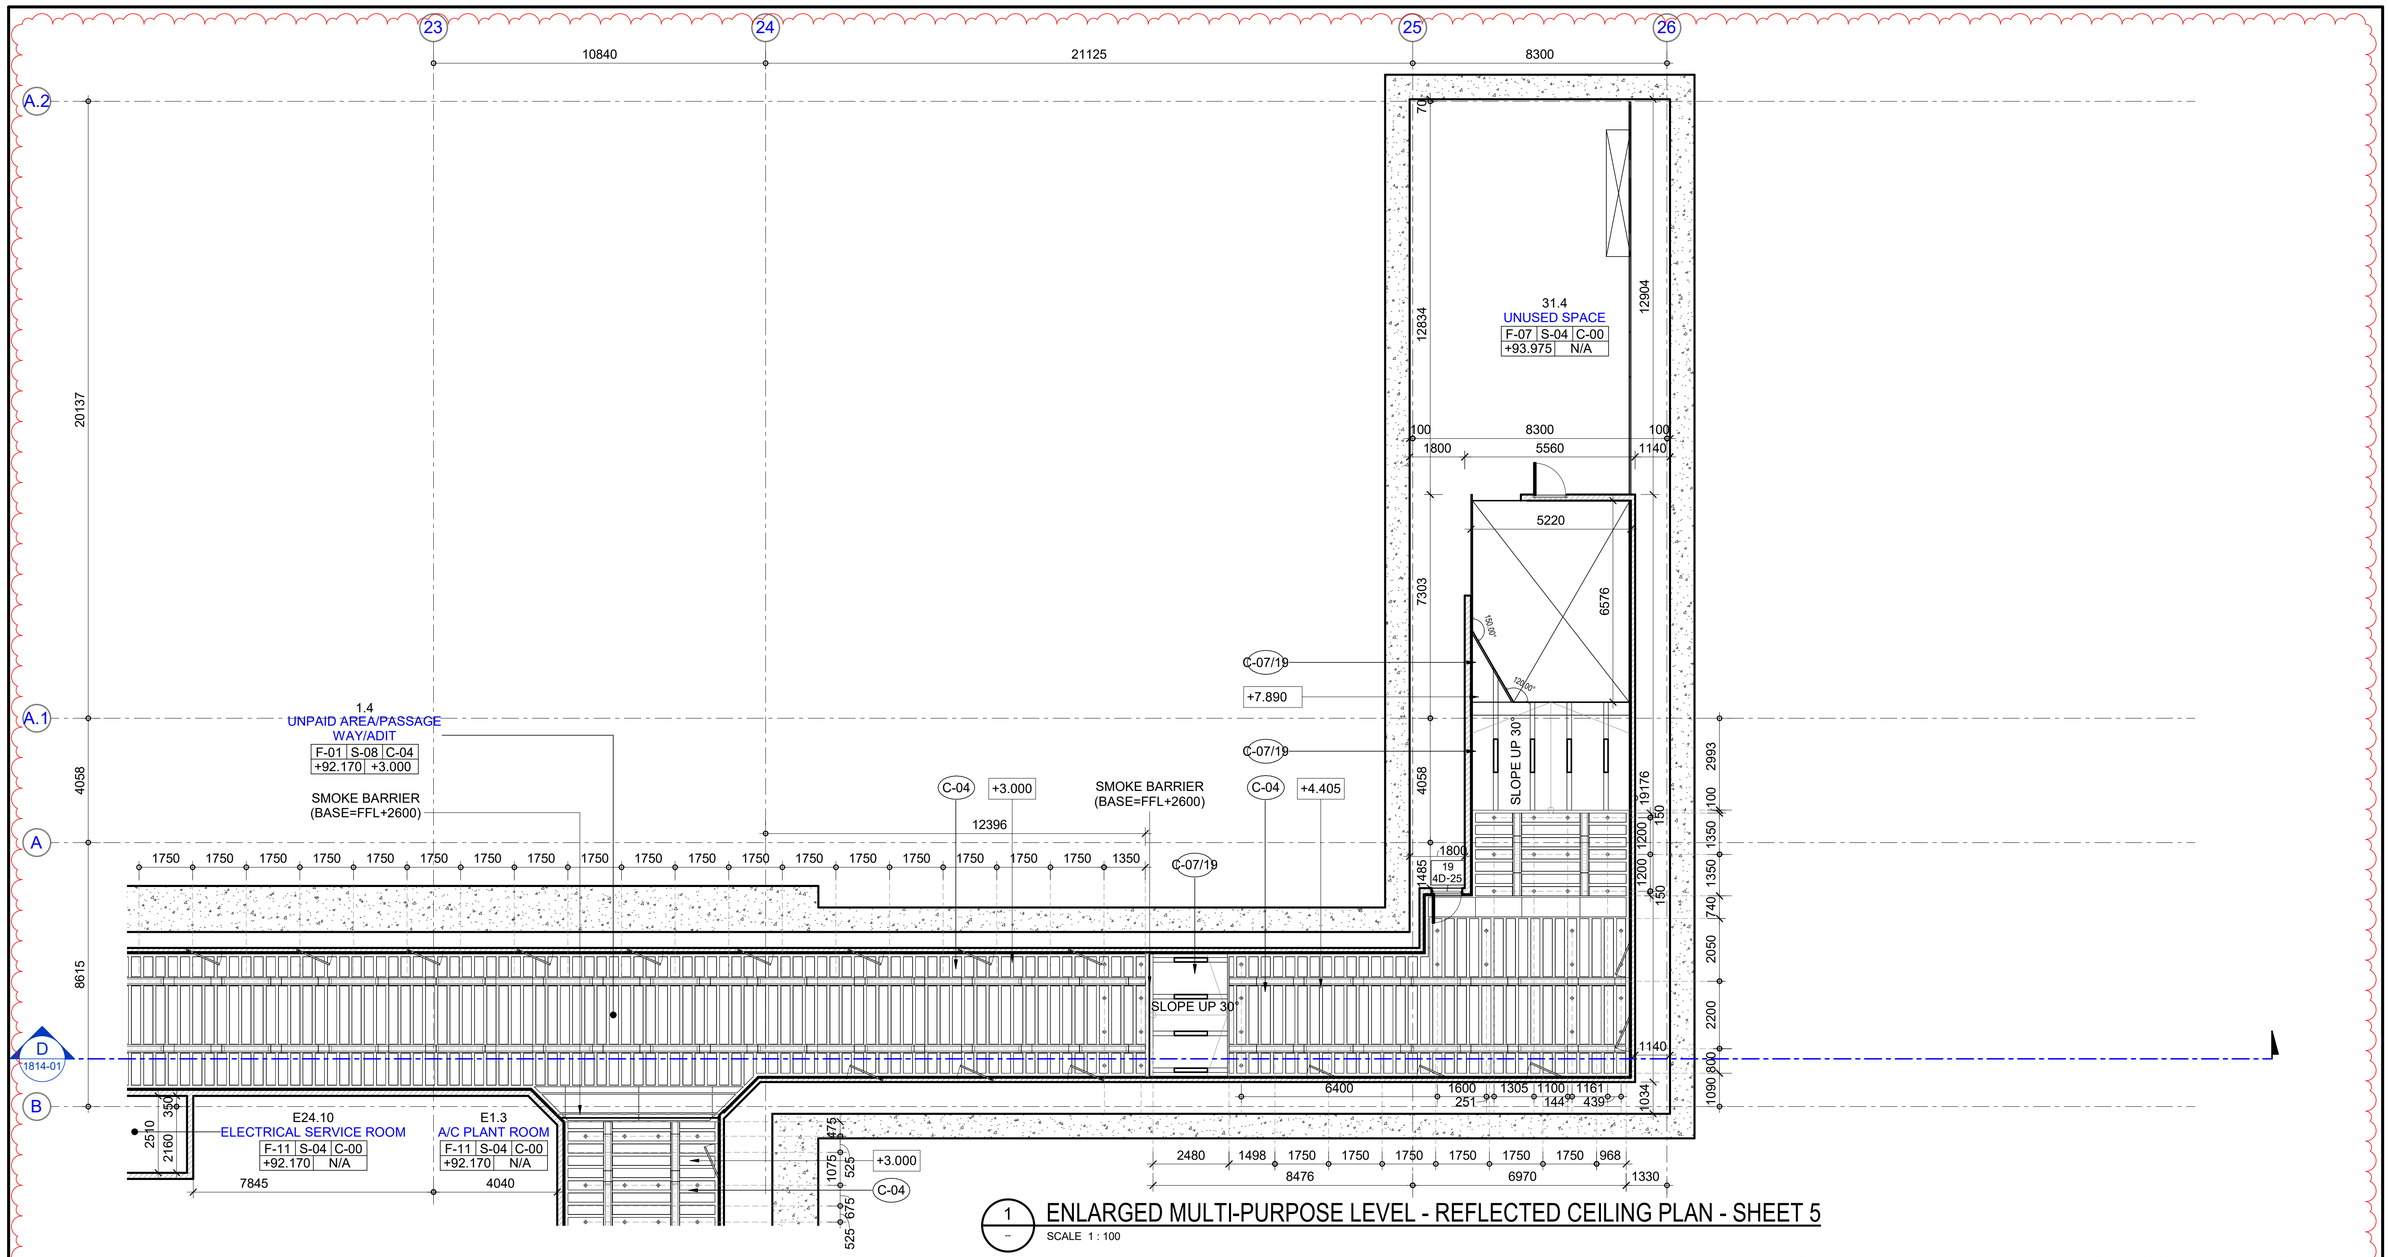

1 ENLARGED MULTI-PURPOSE LEVEL - REFLECTED CEILING PLAN - SHEET 5

SCALE 1 : 100

NOTES :

1. ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2. LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3. DRAWING TO SCALE WHEN PLOTTED AT A1
4. DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5. ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E&M DRAWINGS, CONTRACT DOCUMENTS AND SPECIFICATIONS
6. FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7. DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
8. BLOCKWORK WALLS/ LIGHT WEIGHT CONCRETE PANEL (LPC) WALL TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN
9. FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
10. TO BE READ IN CONJUNCTION WITH SUBM. NO. 1-PROJ-AR-2311-1 & GRAPHIC DESIGN PACKAGE.

LEGENDS :

FLOOR FINISH NUMBER — ROOM NUMBER / ROOM NAME — CEILING TYPE

F-00 S-00 C-00 — SKIRTING TYPE

+00.000 +0.000 — CEILING HEIGHT FROM FFL

FINISHED FLOOR LEVEL

REFER TO 'OPERATION ROOMS' DETAIL DWG. NO. 1-PP19-AR-5XXX-1

X / PP19-AR-XXXX-01 — REFER TO SUBM. NO. 1-PP19-AR-XXXX-1

X / XXXX — REFER TO SUBM. NO. 1-PROJ-AR-2311-1 & 1-PROJ-AR-2321-1

FINISHES CODE :

CEILINGS

C-00 NO CEILING, EXPOSED CONCRETE
C-01 NO CEILING, ACRYLIC INTERIOR PAINT
C-02 600X600 SOLID ALUMN CEILING PANEL
C-03 600X600 PERFORATED ALUMN CEILING PANEL
C-04 (ADIT) & C-05 (PSD) & C-08 (CONCOURSE/ PLATFORM) 300MM (W) PARTIAL PERFORATED ALUMN CEILING PLANK WITH ACOUSTIC NON-WOVEN BACKING [MIN. 25% FREE AREA] C/W 200MM (W) ALUMN CEILING RUNNER
C-06 SOLID ALUMN CEILING PANEL
C-07 1200MM (W) SOLID ALUMN CEILING PANEL
C-09 300MM (W) SOLID ALUMN CEILING PANEL C/W ALUMN GRID RUNNER
C-10 FEATURE CEILING : 300MM (W) SOLID ALUMN CEILING PANEL WITH PRINTED PATTERN C/W STEPPING CEILING ON 4-SIDE
C-11 1500 MM (W) SOLID ALUMN CEILING PANEL

NOTES:
1. ALL ALUMN WORKS TO BE IN POWDER COATING FINISH, OTHERWISE STATED.

CEILING FINISHES :

- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- SOLID ALUMN CEILING
- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- 300MM (W) ALUMN CEILING WITH PRINTED GRAPHIC
- SOLID ALUMN CEILING
- SOLID ALUMN GRID RUNNERS
- SOLID ALUMN TRIMMING / STEPPING ALUMN CEILING


LEGENDS FOR E&M FIXTURES:

- RECESSED DOWNLIGHT
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ DISFUSSER
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ LOUVRE
- 300x600 DB. RECESSED FLUORESCENT W/ LOUVRE
- RECESSED WALL MOUNT LIGHT
- SURFACED WALL MOUNT LIGHT [L1: ROUND SHAPE, L2: SQUARE SHAPE] (L1)
- 1200x600 & 600x600 RETURN AIR GRILLE
- 600x600 SUPPLY AIR DIFFUSER
- SMOKE / HEAT DETECTOR
- SPRINKLER HEAD
- LAMP POST
- LAMP POST
- LED STRIP LIGHT
- 1200x200MM SUPPLY / RETURN AIR DIFFUSER

NOTES:
1. ALL ALUMN CEILING RUNNER TO BE IN 'DARK GREY' COLOUR

0 1 2 5 10 M.
GRAPHIC SCALE 1:100

KEY PLAN

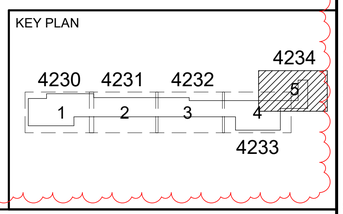

B

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
PMCSC1
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMSCS1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE
STECON
DESIGNER:
AECOM
TEAM Consulting Engineering and Management Co.,Ltd.
GFE The Geotechnical Expert

DESIGNER		OYT						
DESIGN CHECKED		AJT	B	24-01-25	CRD UPDATED	LCC	OYT	AJT
PROJECT MANAGER		LCC	A	19-04-24	CRD	LCC	OYT	AJT
			REV.	DATE	REVISIONS	DWG.	CHK.	APP.


PURPLE LINE PROJECT
CONTRACT 1: UNDERGROUND CIVIL WORKS

SCALE : A1 = 1:100, A3 = 1:200
UNITS : mm.
DATE : 19-04-2024

PP19 : VAJIRA HOSPITAL STATION
MULTI-PURPOSE LEVEL - REFLECTED CEILING PLAN
SHEET 5

STATUS :	DRAWING NO.	REVISION :	SHEET NO.
C	1-PP19-AR-4234-01	B	

1/24/2025 11:31:06 AM Autodesk Docs://Purple Line Extension/PPL-C-DPAR-1-PP19-AR-M3-0001.rvt

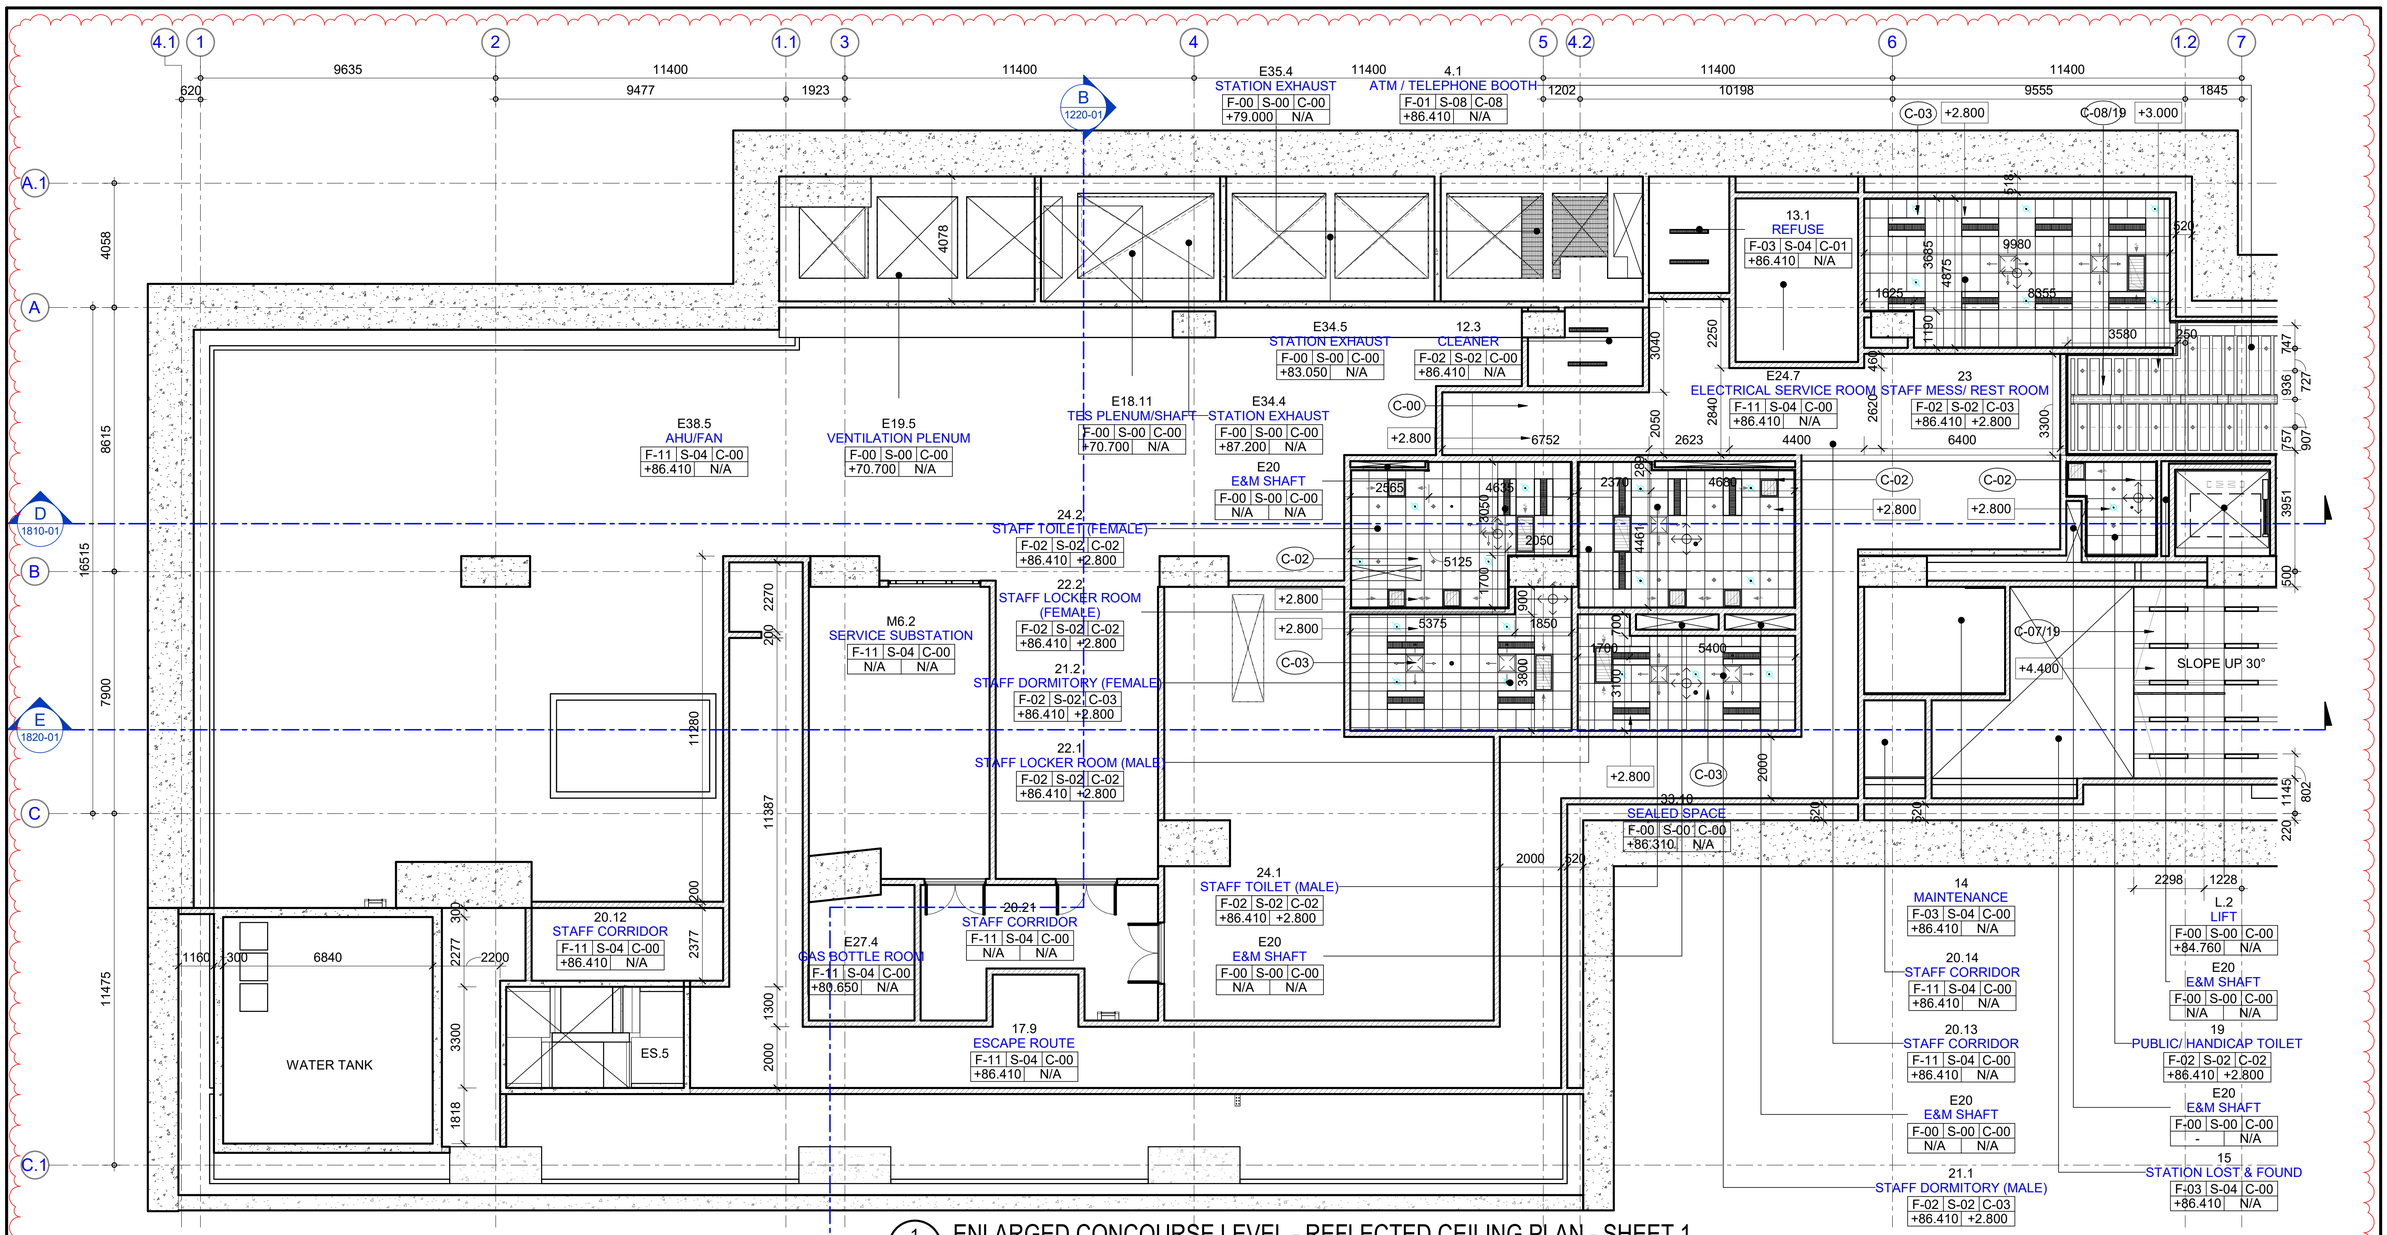

1 -- ENLARGED CONCOURSE LEVEL - REFLECTED CEILING PLAN - SHEET 1

SCALE 1 : 100

NOTES :

1. ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2. LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3. DRAWING TO SCALE WHEN PLOTTED AT A1
4. DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5. ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E&M DRAWINGS, CONTRACT DOCUMENTS AND SPECIFICATIONS
6. FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7. DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
8. BLOCKWORK WALLS/ LIGHT WEIGHT CONCRETE PANEL (LPC) WALL TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN
9. FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
10. TO BE READ IN CONJUNCTION WITH SUBM. NO. 1-PROJ-AR-2311-1 & GRAPHIC DESIGN PACKAGE.

LEGENDS :

FLOOR FINISH NUMBER — ROOM NUMBER — ROOM NAME — F-00 S-00 C-00 — +00.000 +0.000 — CEILING TYPE — SKIRTING TYPE — CEILING HEIGHT FROM FFL

REFER TO 'OPERATION ROOMS' DETAIL DWG. NO. 1-PP19-AR-5XXX-1

X PP19-AR-XXXX-01 REFER TO SUBM. NO. 1-PP19-AR-XXXX-1

X XXXX REFER TO SUBM. NO. 1-PROJ-AR-2311-1 & 1-PROJ-AR-2321-1

FINISHES CODE :

CEILINGS

- **C-00** NO CEILING, EXPOSED CONCRETE
- **C-01** NO CEILING, ACRYLIC INTERIOR PAINT
- **C-02** 600X600 SOLID ALUMN CEILING PANEL
- **C-03** 600X600 PERFORATED ALUMN CEILING PANEL
- **C-04** (ADIT) & C-05 (PSD) & C-08 (CONCOURSE/ PLATFORM) 300MM (W) PARTIAL PERFORATED ALUMN CEILING PLANK WITH ACOUSTIC NON-WOVEN BACKING [MIN. 25% FREE AREA] C/W 200MM (W) ALUMN CEILING RUNNER
- **C-06** SOLID ALUMN CEILING PANEL
- **C-07** 1200MM (W) SOLID ALUMN CEILING PANEL
- **C-09** 300MM (W) SOLID ALUMN CEILING PANEL C/W ALUMN GRID RUNNER
- **C-10** FEATURE CEILING : 300MM (W) SOLID ALUMN CEILING PANEL WITH PRINTED PATTERN C/W STEPPING CEILING ON 4-SIDE
- **C-11** 1500 MM (W) SOLID ALUMN CEILING PANEL

NOTES:
1. ALL ALUMN WORKS TO BE IN POWDER COATING FINISH, OTHERWISE STATED.

CEILING FINISHES :

- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- SOLID ALUMN CEILING
- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- 300MM (W) ALUMN CEILING WITH PRINTED GRAPHIC
- SOLID ALUMN CEILING
- SOLID ALUMN GRID RUNNERS
- SOLID ALUMN TRIMMING / STEPPING ALUMN CEILING

LEGENDS FOR E&M FIXTURES:


- RECESSED DOWNLIGHT
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ DISFUSSER
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ LOUVRE
- 300x600 DB. RECESSED FLUORESCENT W/ LOUVRE
- RECESSED WALL MOUNT LIGHT
- SURFACED WALL MOUNT LIGHT [L1: ROUND SHAPE, L2: SQUARE SHAPE] (L1)

NOTES:
1. ALL ALUMN CEILING RUNNER TO BE IN 'DARK GREY' COLOUR

- 1200x600 & 600x600 RETURN AIR GRILLE
- 600x600 SUPPLY AIR DIFFUSER
- SMOKE / HEAT DETECTOR
- SPRINKLER HEAD
- LAMP POST
- LAMP POST
- LED STRIP LIGHT
- 1200x200MM SUPPLY / RETURN AIR DIFFUSER

GRAPHIC SCALE 0 1 2 5 10 M. — 1:100

KEY PLAN

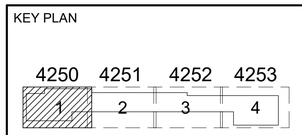

B

PURPLE LINE PROJECT

CONTRACT 1: UNDERGROUND CIVIL WORKS

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
PMCSC1
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMSCS1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE
STECON

DESIGNER:
AECOM
TEAM Consulting Engineering and Management Co.,Ltd.
GFE The Geotechnical Expert
SEA-CONSULT ENGINEERING CO.,LTD.

DESIGNER		OYT
DESIGN CHECKED		AJT
PROJECT MANAGER		LCC


REV.	DATE	REVISIONS	DWG.	CHK.	APP.
B	24-01-25	CRD UPDATED	LCC	OYT	AJT
A	19-04-24	CRD	LCC	OYT	AJT

SCALE : A1 = 1:100 A3 = 1:200
UNITS : mm.
DATE : 19-04-2024

PP19 : VAJIRA HOSPITAL STATION
CONCOURSE LEVEL - REFLECTED CEILING PLAN
SHEET 1

STATUS :	DRAWING NO.	REVISION :	SHEET NO.
C	1-PP19-AR-4250-01	B	

1/24/2025 11:31:15 AM Autodesk Docs://Purple Line Extension/PPL-C-DPAR-1-PP19-AR-M3-0001.rvt

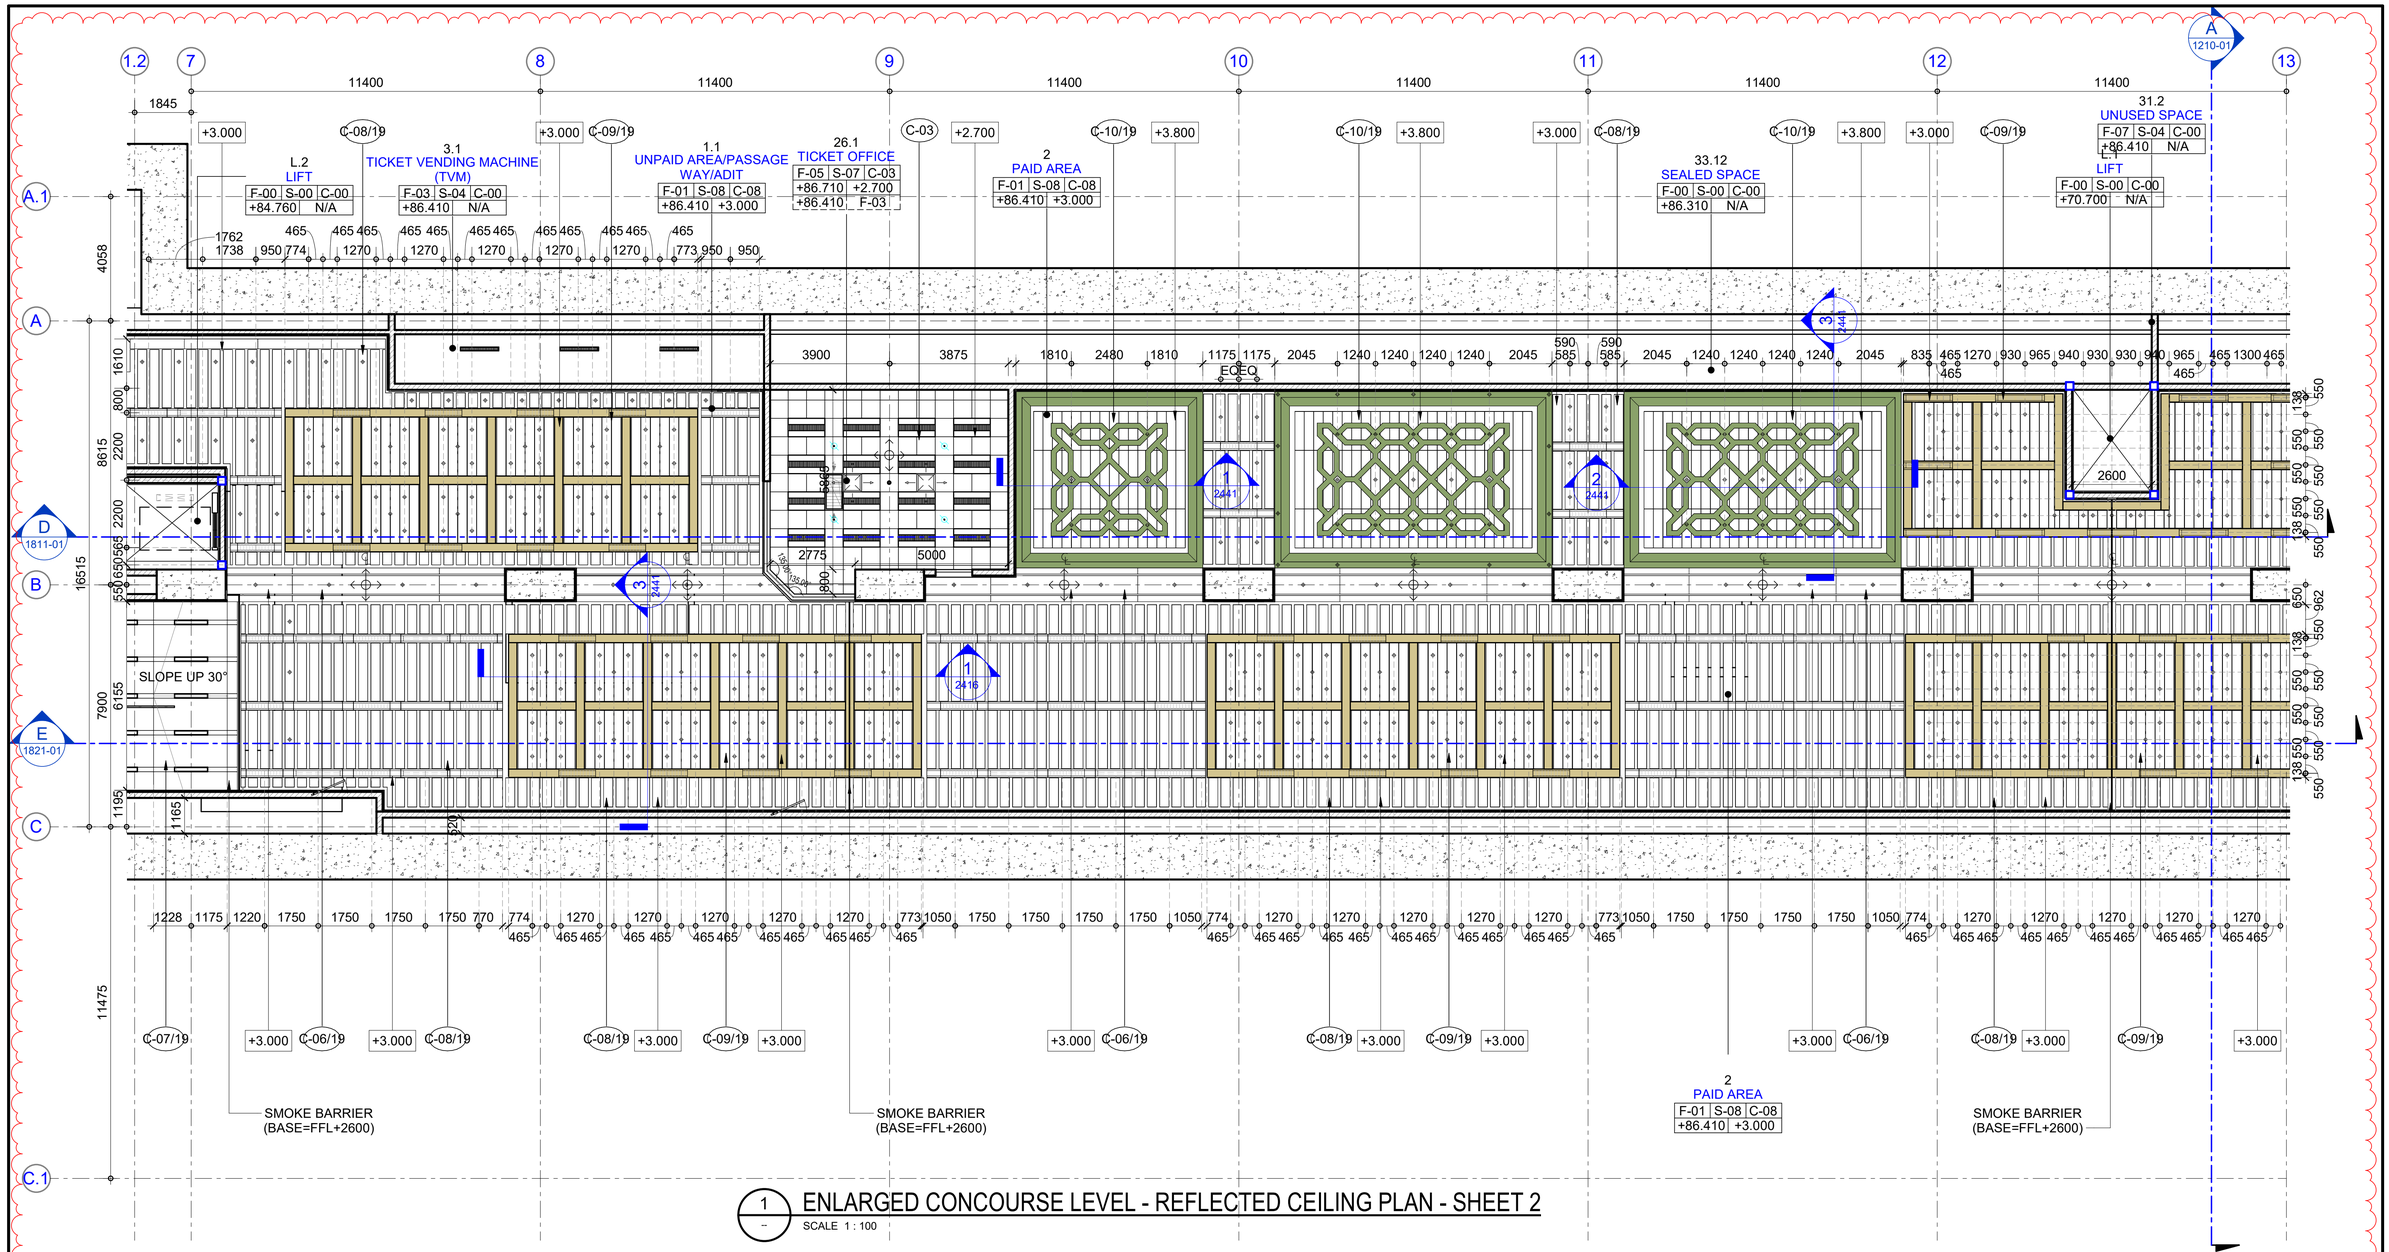

1 ENLARGED CONCOURSE LEVEL - REFLECTED CEILING PLAN - SHEET 2

SCALE 1 : 100

NOTES :

1. ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2. LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3. DRAWING TO SCALE WHEN PLOTTED AT A1
4. DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5. ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E&M DRAWINGS, CONTRACT DOCUMENTS AND SPECIFICATIONS
6. FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7. DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
8. BLOCKWORK WALLS/ LIGHT WEIGHT CONCRETE PANEL (LPC) WALL TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN
9. FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
10. TO BE READ IN CONJUNCTION WITH SUBM. NO. 1-PROJ-AR-2311-1 & GRAPHIC DESIGN PACKAGE.

LEGENDS :

FLOOR FINISH LEVEL — ROOM NUMBER / ROOM NAME — CEILING TYPE — SKIRTING TYPE — CEILING HEIGHT FROM FFL

F-00 | S-00 | C-00
+00.000 | +0.000

REFER TO 'OPERATION ROOMS' DETAIL DWG. NO. 1-PP19-AR-5XXX-1

X / PP19-AR-XXXX-01 — REFER TO SUBM. NO. 1-PP19-AR-XXXX-1

X / XXXX — REFER TO SUBM. NO. 1-PROJ-AR-2311-1 & 1-PROJ-AR-2321-1

FINISHES CODE :

CEILINGS

- **C-00** NO CEILING, EXPOSED CONCRETE
- **C-01** NO CEILING, ACRYLIC INTERIOR PAINT
- **C-02** 600X600 SOLID ALUMN CEILING PANEL
- **C-03** 600X600 PERFORATED ALUMN CEILING PANEL
- **C-04** (ADIT) & C-05 (PSD) & C-08 (CONCOURSE/ PLATFORM) 300MM (W) PARTIAL PERFORATED ALUMN CEILING PLANK WITH ACOUSTIC NON-WOVEN BACKING [MIN. 25% FREE AREA] C/W 200MM (W) ALUMN CEILING RUNNER
- **C-06** SOLID ALUMN CEILING PANEL
- **C-07** 1200MM (W) SOLID ALUMN CEILING PANEL
- **C-09** 300MM (W) SOLID ALUMN CEILING PANEL C/W ALUMN GRID RUNNER
- **C-10** FEATURE CEILING : 300MM (W) SOLID ALUMN CEILING PANEL WITH PRINTED PATTERN C/W STEPPING CEILING ON 4-SIDE
- **C-11** 1500 MM (W) SOLID ALUMN CEILING PANEL

NOTES:
1. ALL ALUMN WORKS TO BE IN POWDER COATING FINISH, OTHERWISE STATED.

CEILING FINISHES :

- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- SOLID ALUMN CEILING
- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- 300MM (W) ALUMN CEILING WITH PRINTED GRAPHIC
- SOLID ALUMN CEILING
- SOLID ALUMN GRID RUNNERS
- SOLID ALUMN TRIMMING / STEPPING ALUMN CEILING

LEGENDS FOR E&M FIXTURES:


- RECESSED DOWNLIGHT
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ DISFUSSER
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ LOUVRE
- 300x600 DB. RECESSED FLUORESCENT W/ LOUVRE
- RECESSED WALL MOUNT LIGHT
- SURFACED WALL MOUNT LIGHT [L1: ROUND SHAPE, L2: SQUARE SHAPE] (L1)
- 1200x600 & 600x600 RETURN AIR GRILLE
- 600x600 SUPPLY AIR DIFFUSER
- SMOKE / HEAT DETECTOR (S)
- SPRINKLER HEAD
- LAMP POST
- LAMP POST
- LED STRIP LIGHT
- 1200x200MM SUPPLY / RETURN AIR DIFFUSER

NOTES:
1. ALL ALUMN CEILING RUNNER TO BE IN 'DARK GREY' COLOUR

B

GRAPHIC SCALE 0 1 2 5 10 M. — 1:100

KEY PLAN

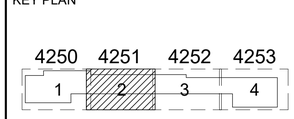

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
PMCSC1
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMSCS1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE
STECON
DESIGNER: AECOM
TEAM Consulting Engineering and Management Co.,Ltd.
GFE The Geotechnical Expert
SEA-CONSULT ENGINEERING CO.,LTD.

			REV.	DATE	REVISIONS	DWG.	CHK.	APP.
DESIGNER		OYT	B	24-01-25	CRD UPDATED	LCC	OYT	AJT
DESIGN CHECKED		AJT	A	19-04-24	CRD	LCC	OYT	AJT
PROJECT MANAGER		LCC						


PURPLE LINE PROJECT
CONTRACT 1: UNDERGROUND CIVIL WORKS

SCALE : A1 = 1:100, A3 = 1:200
UNITS : mm.
DATE : 19-04-2024

PP19 : VAJIRA HOSPITAL STATION
CONCOURSE LEVEL - REFLECTED CEILING PLAN
SHEET 2

STATUS : C
DRAWING NO. 1-PP19-AR-4251-01
REVISION : B
SHEET NO.

1/24/2025 4:32:41 PM Autodesk Docs://Purple Line Extension/PPL-C-DPAR-1-PP19-AR-M3-0001.rvt

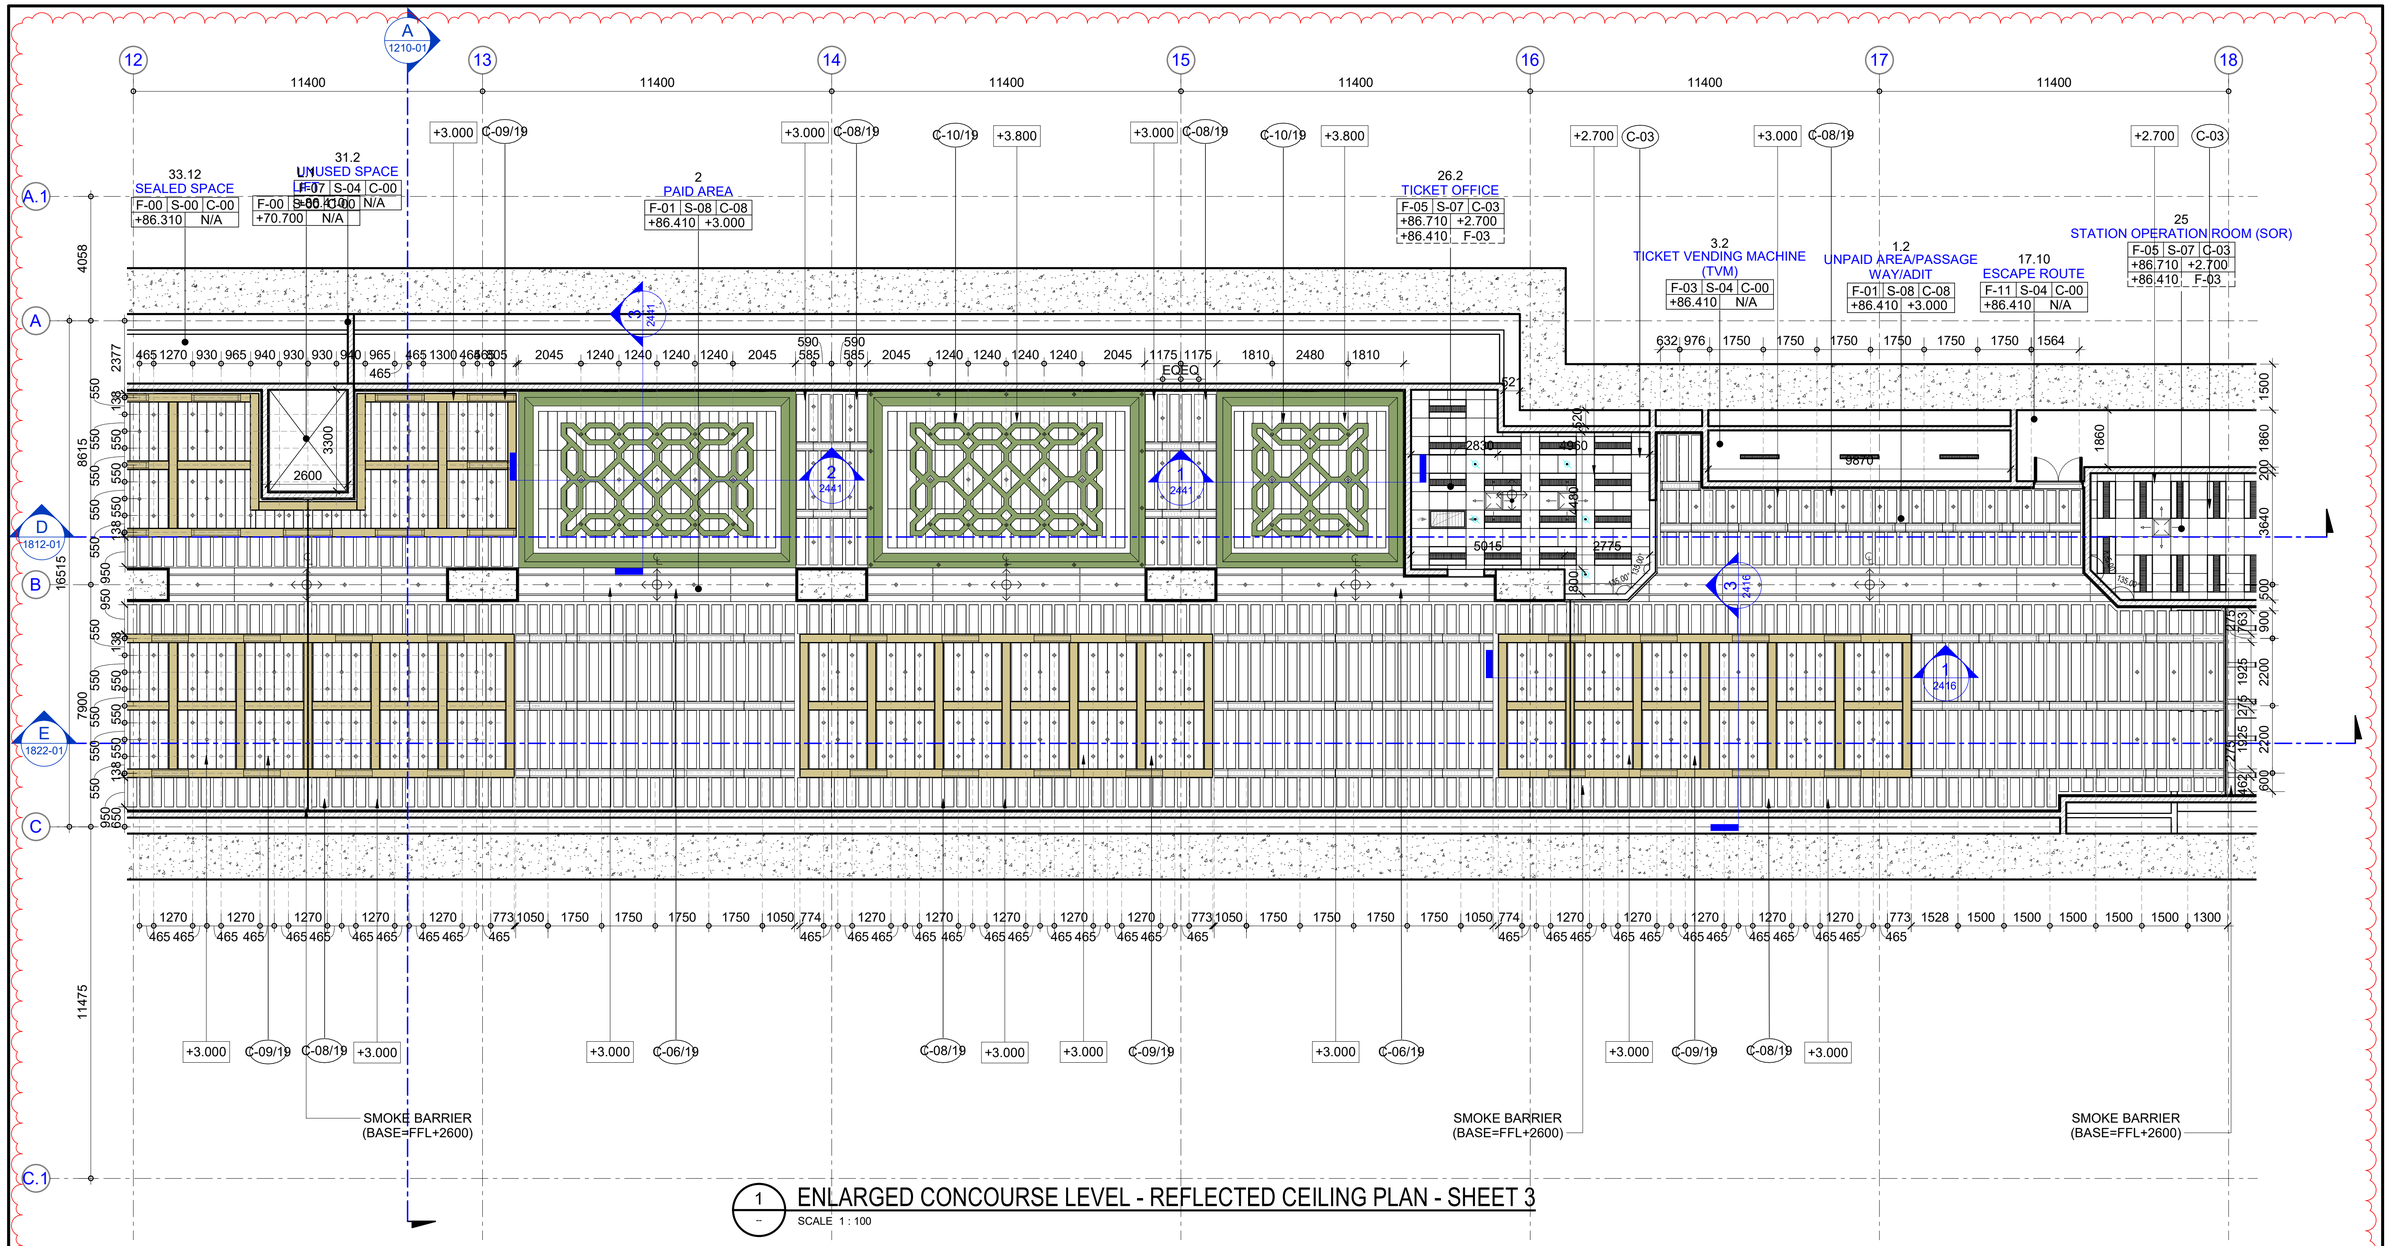

1 ENLARGED CONCOURSE LEVEL - REFLECTED CEILING PLAN - SHEET 3

SCALE 1 : 100

NOTES :

1. ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2. LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3. DRAWING TO SCALE WHEN PLOTTED AT A1
4. DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5. ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E&M DRAWINGS, CONTRACT DOCUMENTS AND SPECIFICATIONS
6. FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7. DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
8. BLOCKWORK WALLS/ LIGHT WEIGHT CONCRETE PANEL (LPC) WALL TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN
9. FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
10. TO BE READ IN CONJUNCTION WITH SUBM. NO. 1-PROJ-AR-2311-1 & GRAPHIC DESIGN PACKAGE.

LEGENDS :

FLOOR FINISH NUMBER — ROOM NUMBER — ROOM NAME — CEILING TYPE — SKIRTING TYPE — CEILING HEIGHT FROM FFL — FINISHED FLOOR LEVEL

F-00 S-00 C-00
+00.000 +0.000

REFER TO 'OPERATION ROOMS' DETAIL DWG. NO. 1-PP19-AR-5XXX-1

X PP19-AR-XXXX-01 REFER TO SUBM. NO. 1-PP19-AR-XXXX-1

X XXXX REFER TO SUBM. NO. 1-PROJ-AR-2311-1 & 1-PROJ-AR-2321-1

FINISHES CODE :

CEILINGS

- **C-00** NO CEILING, EXPOSED CONCRETE
- **C-01** NO CEILING, ACRYLIC INTERIOR PAINT
- **C-02** 600X600 SOLID ALUMN CEILING PANEL
- **C-03** 600X600 PERFORATED ALUMN CEILING PANEL
- **C-04** (ADIT) & C-05 (PSD) & C-08 (CONCOURSE/ PLATFORM) 300MM (W) PARTIAL PERFORATED ALUMN CEILING PLANK WITH ACOUSTIC NON-WOVEN BACKING [MIN. 25% FREE AREA] C/W 200MM (W) ALUMN CEILING RUNNER
- **C-06** SOLID ALUMN CEILING PANEL
- **C-07** 1200MM (W) SOLID ALUMN CEILING PANEL
- **C-09** 300MM (W) SOLID ALUMN CEILING PANEL C/W ALUMN GRID RUNNER
- **C-10** FEATURE CEILING : 300MM (W) SOLID ALUMN CEILING PANEL WITH PRINTED PATTERN C/W STEPPING CEILING ON 4-SIDE
- **C-11** 1500 MM (W) SOLID ALUMN CEILING PANEL

NOTES:
1. ALL ALUMN WORKS TO BE IN POWDER COATING FINISH, OTHERWISE STATED.

CEILING FINISHES :

- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- SOLID ALUMN CEILING
- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- 300MM (W) ALUMN CEILING WITH PRINTED GRAPHIC
- SOLID ALUMN CEILING
- SOLID ALUMN GRID RUNNERS
- SOLID ALUMN TRIMMING / STEPPING ALUMN CEILING


LEGENDS FOR E&M FIXTURES:

- RECESSED DOWNLIGHT
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ DISFUSSER
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ LOUVRE
- 300x600 DB. RECESSED FLUORESCENT W/ LOUVRE
- RECESSED WALL MOUNT LIGHT
- SURFACED WALL MOUNT LIGHT [L1: ROUND SHAPE, L2: SQUARE SHAPE] (L1)
- 1200x600 & 600x600 RETURN AIR GRILLE
- 600x600 SUPPLY AIR DIFFUSER
- SMOKE / HEAT DETECTOR
- SPRINKLER HEAD
- LAMP POST
- LAMP POST
- LED STRIP LIGHT
- 1200x200MM SUPPLY / RETURN AIR DIFFUSER

NOTES:
1. ALL ALUMN CEILING RUNNER TO BE IN 'DARK GREY' COLOUR

GRAPHIC SCALE 0 1 2 5 10 M. — 1:100

KEY PLAN

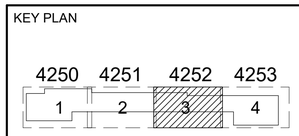

B

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
PMCSC1
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMSCS1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE
STECON
DESIGNER: AECOM
TEAM Consulting Engineering and Management Co.,Ltd.
GFE The Geotechnical Expert

DESIGNER		OYT						
DESIGN CHECKED		AJT						
PROJECT MANAGER		LCC	B	24-01-25	CRD UPDATED	LCC	OYT	AJT
			A	19-04-24	CRD	LCC	OYT	AJT
			REV.	DATE	REVISIONS	DWG.	CHK.	APP.


PURPLE LINE PROJECT
CONTRACT 1: UNDERGROUND CIVIL WORKS

SCALE : A1 = 1:100, A3 = 1:200
UNITS : mm.
DATE : 19-04-2024

PP19 : VAJIRA HOSPITAL STATION
CONCOURSE LEVEL - REFLECTED CEILING PLAN
SHEET 3

STATUS :	DRAWING NO.	REVISION :	SHEET NO.
C	1-PP19-AR-4252-01	B	

1/24/2025 4:33:19 PM Autodesk Docs://Purple Line Extension/PPL-C-DPAR-1-PP19-AR-M3-0001.rvt

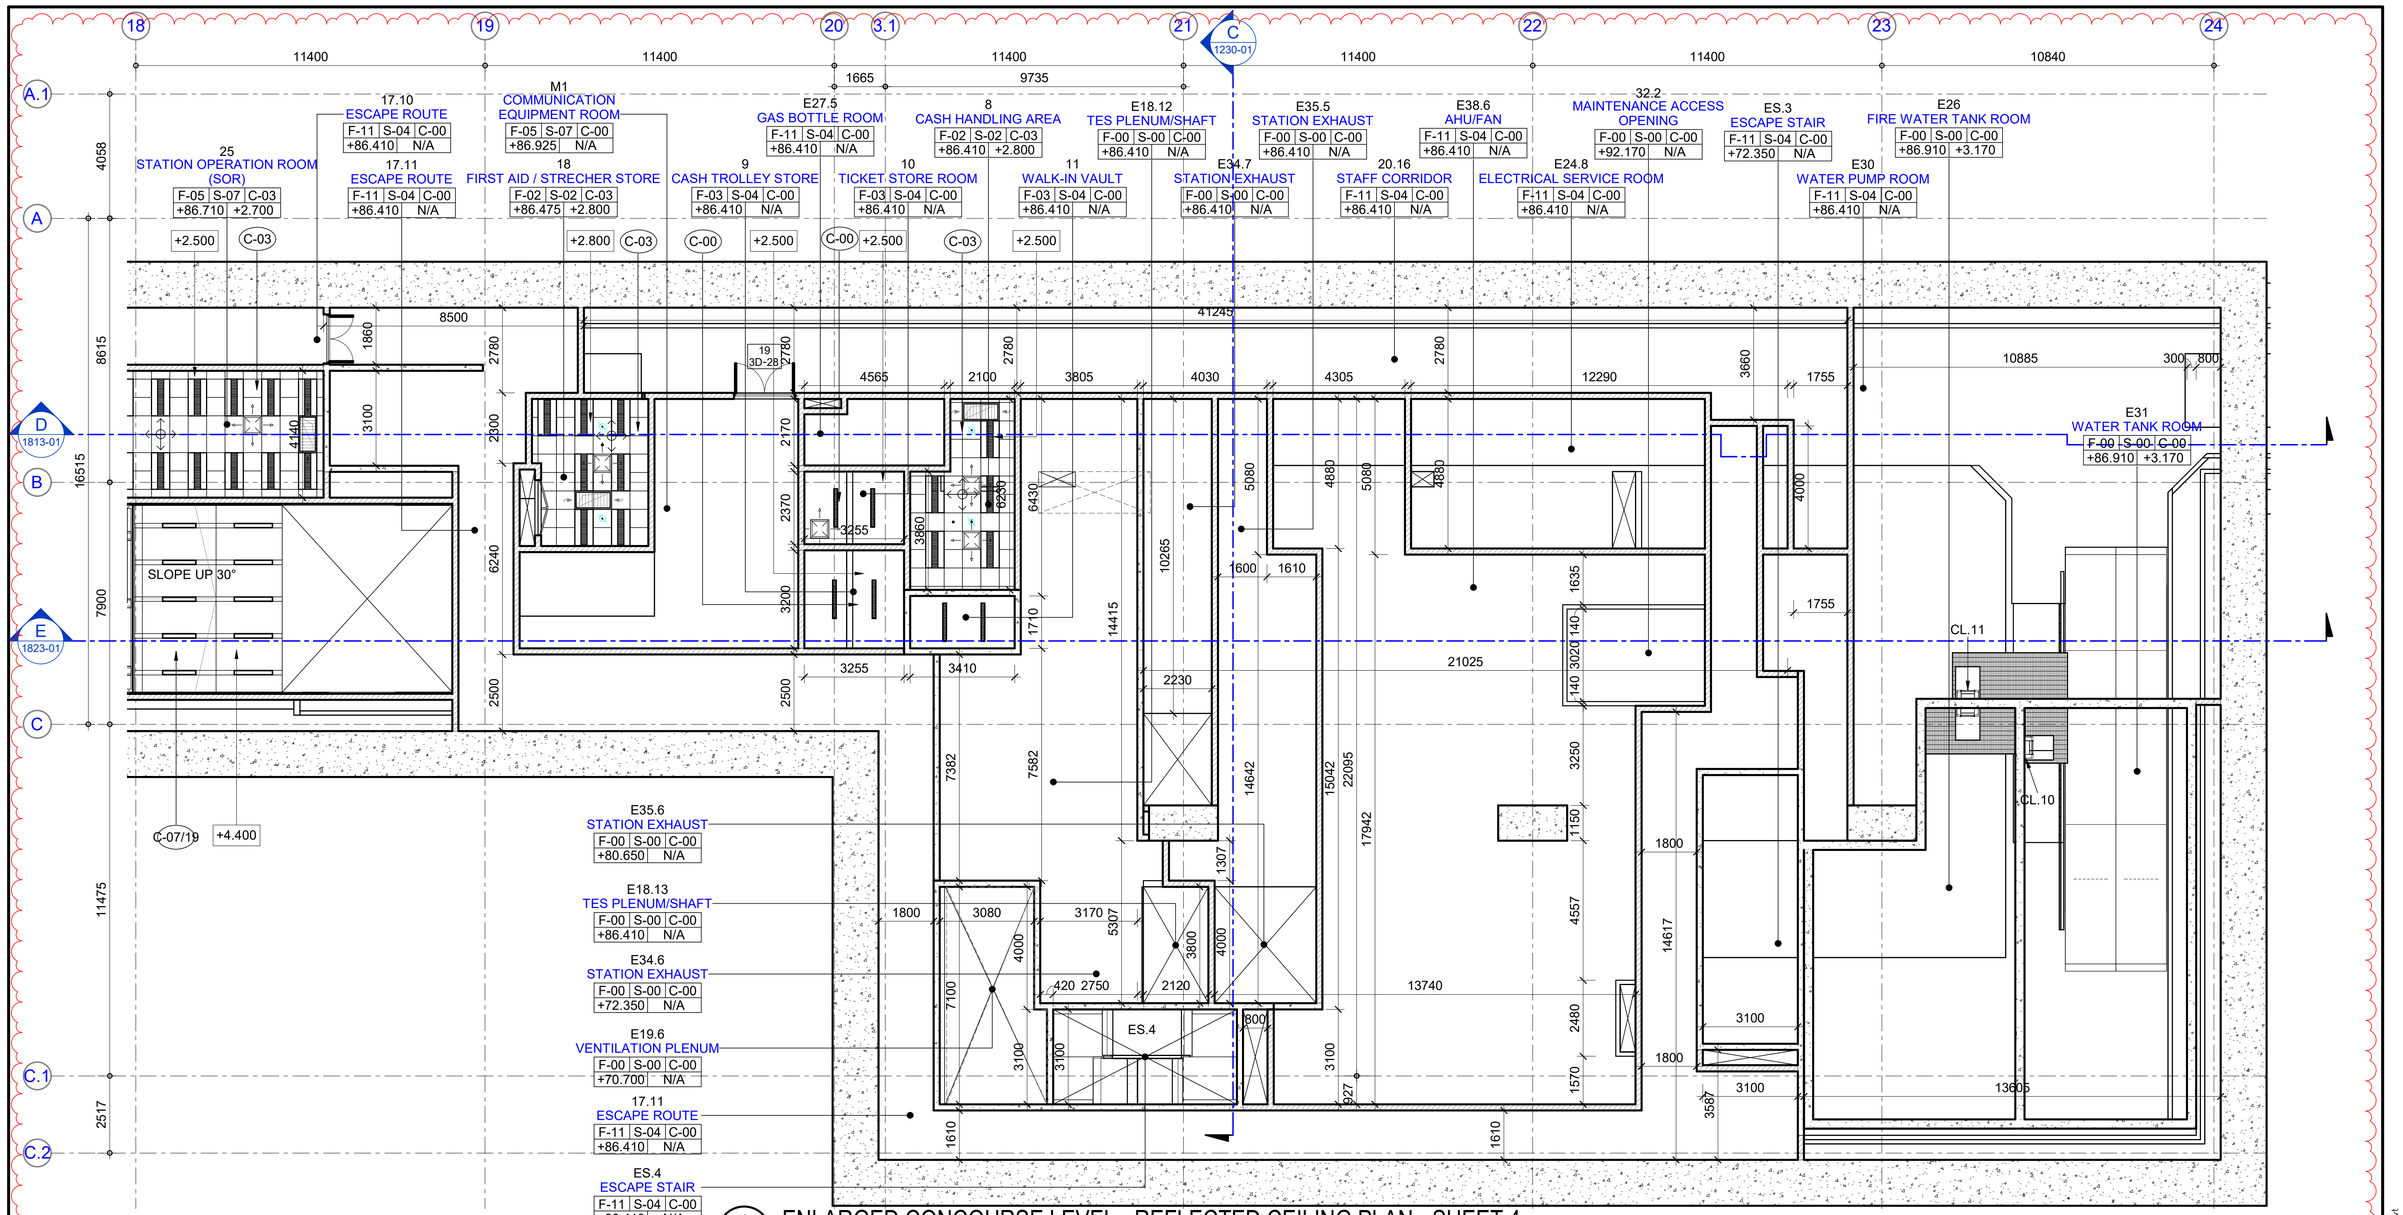

ENLARGED CONCOURSE LEVEL - REFLECTED CEILING PLAN - SHEET 4

1 / -- SCALE 1 : 100

NOTES :

1. ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2. LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3. DRAWING TO SCALE WHEN PLOTTED AT A1
4. DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5. ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E&M DRAWINGS, CONTRACT DOCUMENTS AND SPECIFICATIONS
6. FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7. DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
8. BLOCKWORK WALLS/ LIGHT WEIGHT CONCRETE PANEL (LPC) WALL TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN
9. FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
10. TO BE READ IN CONJUNCTION WITH SUBM. NO. 1-PROJ-AR-2311-1 & GRAPHIC DESIGN PACKAGE.

LEGENDS :

FLOOR FINISH NUMBER — ROOM NUMBER — ROOM NAME — CEILING TYPE — SKIRTING TYPE (F-00 S-00 C-00 / +00.000 +0.000) — CEILING HEIGHT FROM FFL — FINISHED FLOOR LEVEL

REFER TO 'OPERATION ROOMS' DETAIL DWG. NO. 1-PP19-AR-5XXX-1

X / PP19-AR-XXXX-01 — REFER TO SUBM. NO. 1-PP19-AR-XXXX-1

X / XXXX — REFER TO SUBM. NO. 1-PROJ-AR-2311-1 & 1-PROJ-AR-2321-1

FINISHES CODE :

CEILINGS

- **C-00** NO CEILING, EXPOSED CONCRETE
- **C-01** NO CEILING, ACRYLIC INTERIOR PAINT
- **C-02** 600X600 SOLID ALUMN CEILING PANEL
- **C-03** 600X600 PERFORATED ALUMN CEILING PANEL
- **C-04** (ADIT) & C-05 (PSD) & C-08 (CONCOURSE/ PLATFORM) 300MM (W) PARTIAL PERFORATED ALUMN CEILING PLANK WITH ACOUSTIC NON-WOVEN BACKING [MIN. 25% FREE AREA] C/W 200MM (W) ALUMN CEILING RUNNER
- **C-06** SOLID ALUMN CEILING PANEL
- **C-07** 1200MM (W) SOLID ALUMN CEILING PANEL
- **C-09** 300MM (W) SOLID ALUMN CEILING PANEL C/W ALUMN GRID RUNNER
- **C-10** FEATURE CEILING : 300MM (W) SOLID ALUMN CEILING PANEL WITH PRINTED PATTERN C/W STEPPING CEILING ON 4-SIDE
- **C-11** 1500 MM (W) SOLID ALUMN CEILING PANEL

NOTES:
1. ALL ALUMN WORKS TO BE IN POWDER COATING FINISH, OTHERWISE STATED.

CEILING FINISHES :

- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- SOLID ALUMN CEILING
- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- 300MM (W) ALUMN CEILING WITH PRINTED GRAPHIC
- SOLID ALUMN CEILING
- SOLID ALUMN GRID RUNNERS
- SOLID ALUMN TRIMMING / STEPPING ALUMN CEILING

LEGENDS FOR E&M FIXTURES:


- RECESSED DOWNLIGHT
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ DISFUSSER
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ LOUVRE
- 300x600 DB. RECESSED FLUORESCENT W/ LOUVRE
- RECESSED WALL MOUNT LIGHT
- SURFACED WALL MOUNT LIGHT [L1: ROUND SHAPE, L2: SQUARE SHAPE] (L1)

NOTES:
1. ALL ALUMN CEILING RUNNER TO BE IN 'DARK GREY' COLOUR

- 1200x600 & 600x600 RETURN AIR GRILLE
- 1200x200MM SUPPLY / RETURN AIR DIFFUSER
- 600x600 SUPPLY AIR DIFFUSER
- SMOKE / HEAT DETECTOR
- SPRINKLER HEAD
- LAMP POST
- LAMP POST
- LED STRIP LIGHT

GRAPHIC SCALE 0 1 2 5 10 M. — 1:100

KEY PLAN

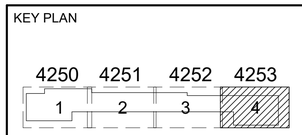

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
PMCSC1
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMSCS1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE
DESIGNER: AECOM, TEAM Consulting Engineering and Management Co.,Ltd., GFE The Geotechnical Expert

DESIGNER		OYT
DESIGN CHECKED		AJT
PROJECT MANAGER		LCC


REV.	DATE	REVISIONS	DWG.	CHK.	APP.
B	24-01-25	CRD UPDATED	LCC	OYT	AJT
A	19-04-24	CRD	LCC	OYT	AJT

PURPLE LINE PROJECT
CONTRACT 1: UNDERGROUND CIVIL WORKS

PP19 : VAJIRA HOSPITAL STATION
CONCOURSE LEVEL - REFLECTED CEILING PLAN
SHEET 4

SCALE : A1 = 1:100, A3 = 1:200
UNITS : mm.
DATE : 19-04-2024
STATUS : C
DRAWING NO. : 1-PP19-AR-4253-01
REVISION : B
SHEET NO. :

1/24/2025 11:32:02 AM Autodesk Docs://Purple Line Extension/PPL-C-DPAR-1-PP19-AR-M3-0001.rvt

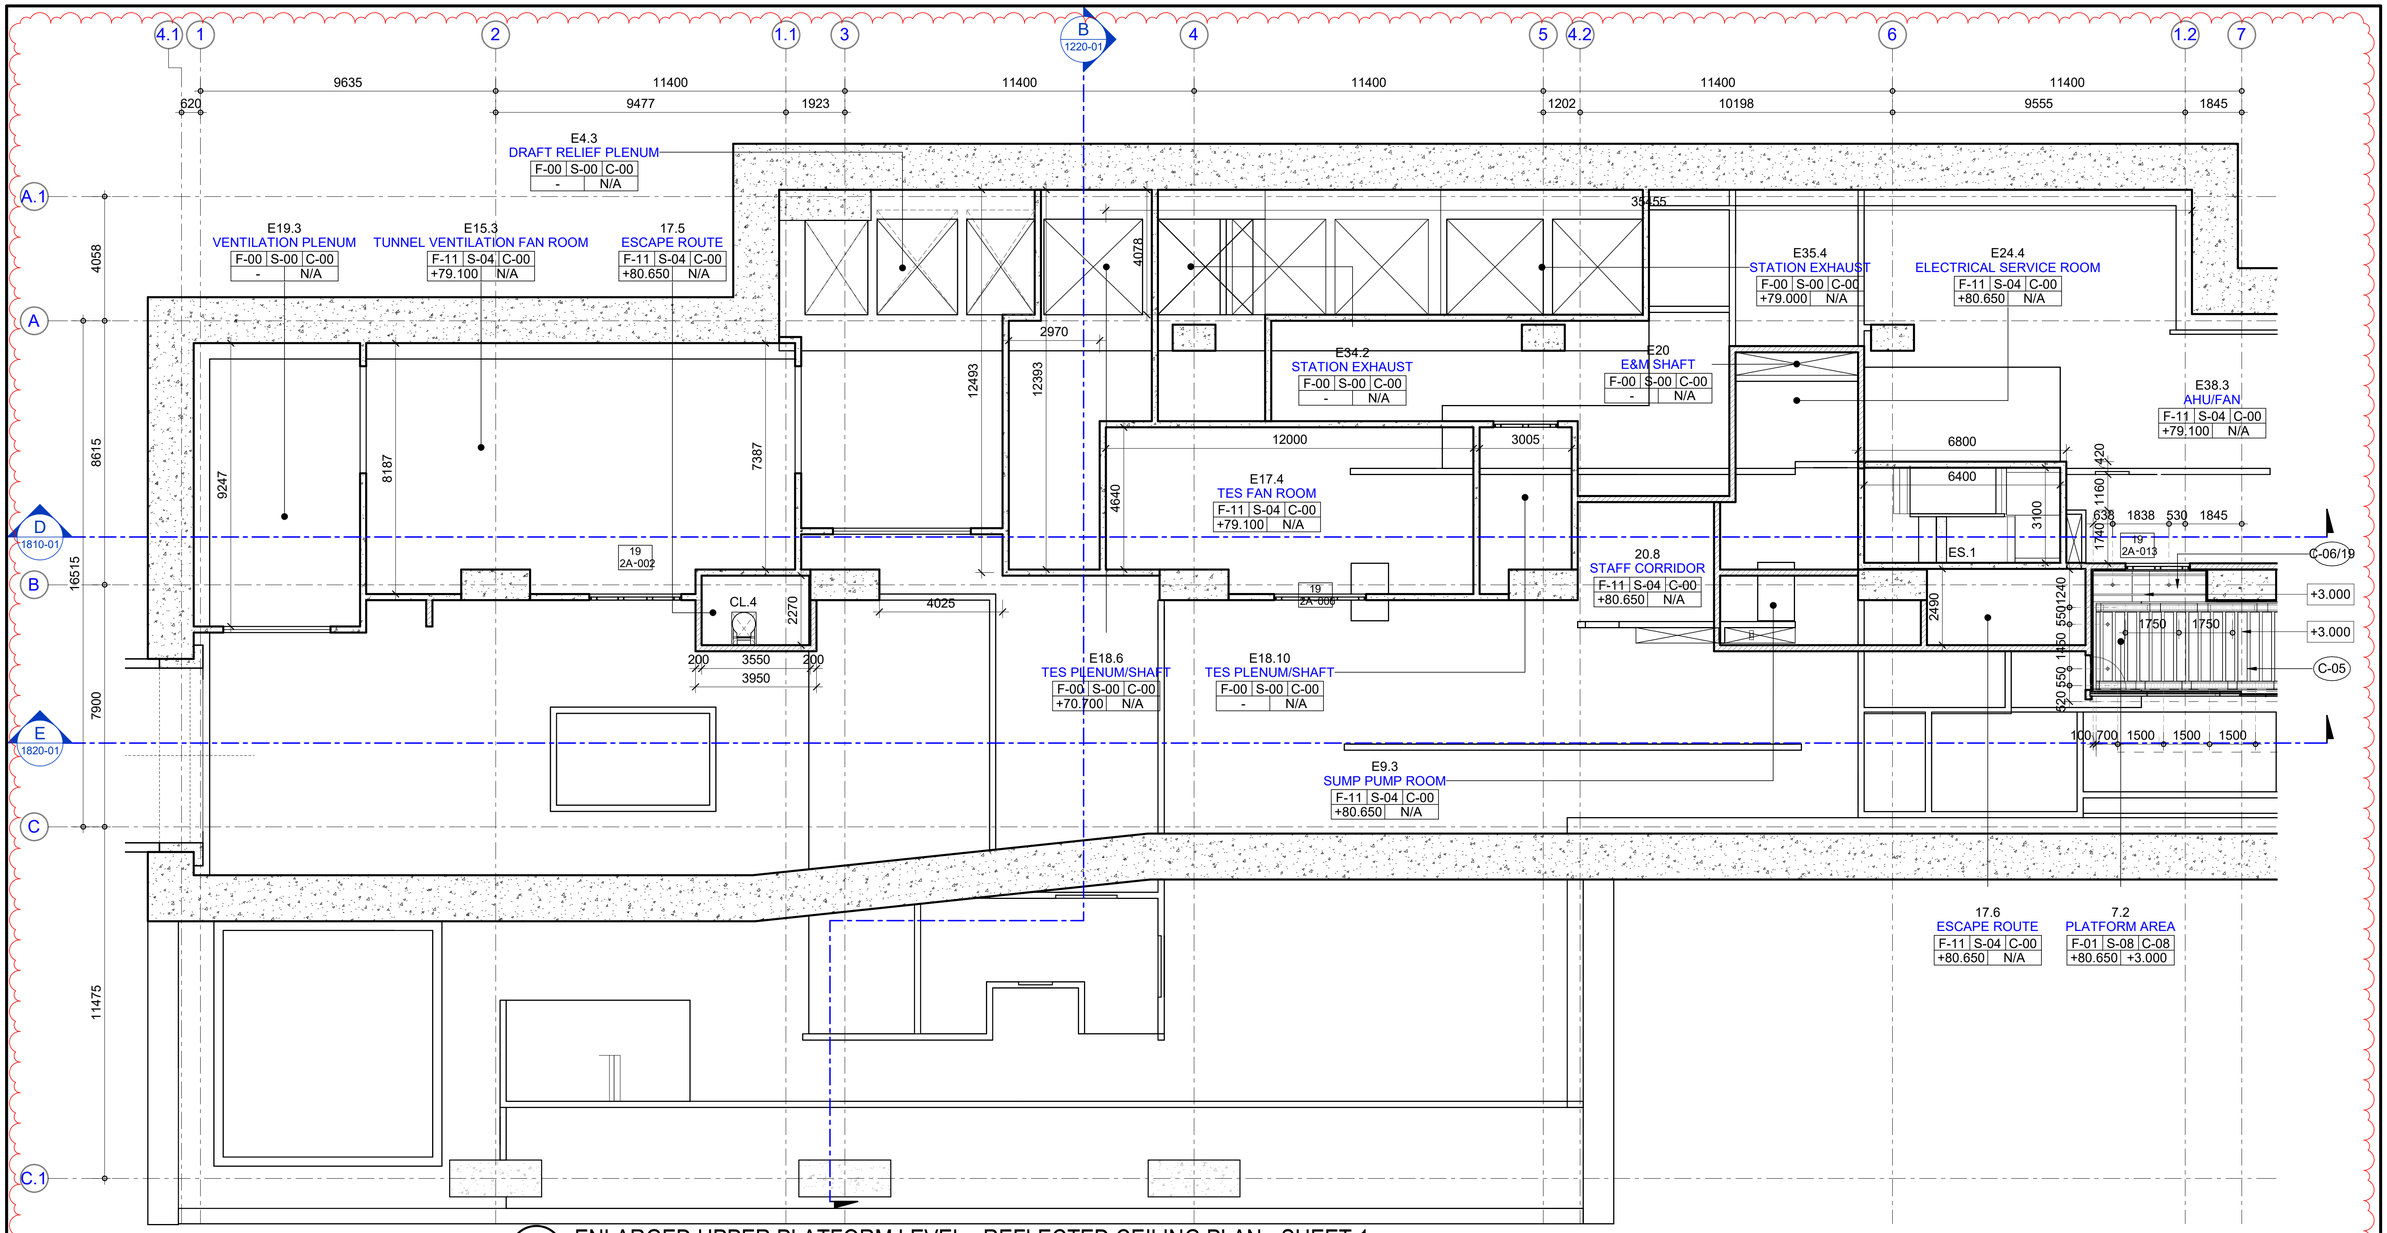

1 ENLARGED UPPER PLATFORM LEVEL - REFLECTED CEILING PLAN - SHEET 1

SCALE 1 : 100

NOTES :

1. ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2. LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3. DRAWING TO SCALE WHEN PLOTTED AT A1
4. DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5. ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E&M DRAWINGS, CONTRACT DOCUMENTS AND SPECIFICATIONS
6. FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7. DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
8. BLOCKWORK WALLS/ LIGHT WEIGHT CONCRETE PANEL (LPC) WALL TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN
9. FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
10. TO BE READ IN CONJUNCTION WITH SUBM. NO. 1-PROJ-AR-2311-1 & GRAPHIC DESIGN PACKAGE.

LEGENDS :

FLOOR FINISH LEVEL — ROOM NUMBER — ROOM NAME — CEILING TYPE — SKIRTING TYPE — CEILING HEIGHT FROM FFL

F-00 S-00 C-00
+00.000 +0.000

REFER TO 'OPERATION ROOMS' DETAIL DWG. NO. 1-PP19-AR-5XXX-1

X PP19-AR-XXXX-01 REFER TO SUBM. NO. 1-PP19-AR-XXXX-1

X XXXX REFER TO SUBM. NO. 1-PROJ-AR-2311-1 & 1-PROJ-AR-2321-1

FINISHES CODE :

CEILINGS

C-00 NO CEILING, EXPOSED CONCRETE
C-01 NO CEILING, ACRYLIC INTERIOR PAINT
C-02 600X600 SOLID ALUMN CEILING PANEL
C-03 600X600 PERFORATED ALUMN CEILING PANEL
C-04 (ADIT) & C-05 (PSD) & C-08 (CONCOURSE/ PLATFORM) 300MM (W) PARTIAL PERFORATED ALUMN CEILING PLANK WITH ACOUSTIC NON-WOVEN BACKING [MIN. 25% FREE AREA] C/W 200MM (W) ALUMN CEILING RUNNER
C-06 SOLID ALUMN CEILING PANEL
C-07 1200MM (W) SOLID ALUMN CEILING PANEL
C-09 300MM (W) SOLID ALUMN CEILING PANEL C/W ALUMN GRID RUNNER
C-10 FEATURE CEILING : 300MM (W) SOLID ALUMN CEILING PANEL WITH PRINTED PATTERN C/W STEPPING CEILING ON 4-SIDE
C-11 1500 MM (W) SOLID ALUMN CEILING PANEL

NOTES:
1. ALL ALUMN WORKS TO BE IN POWDER COATING FINISH, OTHERWISE STATED.

CEILING FINISHES :

- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- SOLID ALUMN CEILING
- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- 300MM (W) ALUMN CEILING WITH PRINTED GRAPHIC
- SOLID ALUMN CEILING
- SOLID ALUMN GRID RUNNERS
- SOLID ALUMN TRIMMING / STEPPING ALUMN CEILING


LEGENDS FOR E&M FIXTURES:

- RECESSED DOWNLIGHT
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ DISFUSSER
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ LOUVRE
- 300x600 DB. RECESSED FLUORESCENT W/ LOUVRE
- RECESSED WALL MOUNT LIGHT
- SURFACED WALL MOUNT LIGHT [L1: ROUND SHAPE, L2: SQUARE SHAPE] (L1)
- 1200x600 & 600x600 RETURN AIR GRILLE
- 600x600 SUPPLY AIR DIFFUSER
- SMOKE / HEAT DETECTOR
- SPRINKLER HEAD
- LAMP POST
- LAMP POST
- LED STRIP LIGHT
- 1200x200MM SUPPLY / RETURN AIR DIFFUSER

NOTES:
1. ALL ALUMN CEILING RUNNER TO BE IN 'DARK GREY' COLOUR

0 1 2 5 10 M.
GRAPHIC SCALE 1:100

KEY PLAN



B

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
PMCSC1
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMSCS1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE
DESIGNER: AECOM
TEAM Consulting Engineering and Management Co.,Ltd.
GFE The Geotechnical Expert
SEA-CONSULT ENGINEERING CO.,LTD.


			REV.	DATE	REVISIONS	DWG.	CHK.	APP.
DESIGNER		OYT						
DESIGN CHECKED		AJT	B	24-01-25	CRD UPDATED	LCC	OYT	AJT
PROJECT MANAGER		LCC	A	19-04-24	CRD	LCC	OYT	AJT

PURPLE LINE PROJECT
CONTRACT 1: UNDERGROUND CIVIL WORKS

SCALE : A1 = 1:100, A3 = 1:200
UNITS : mm.
DATE : 19-04-2024
STATUS : C
DRAWING NO. : 1-PP19-AR-4260-01
REVISION : B
SHEET NO. :

PP19 : VAJIRA HOSPITAL STATION
UPPER PLATFORM LEVEL - REFLECTED CEILING PLAN
SHEET 1

1/24/2025 11:32:10 AM Autodesk Docs://Purple Line Extension/PPL-C-DPAR-1-PP19-AR-M3-0001.rvt

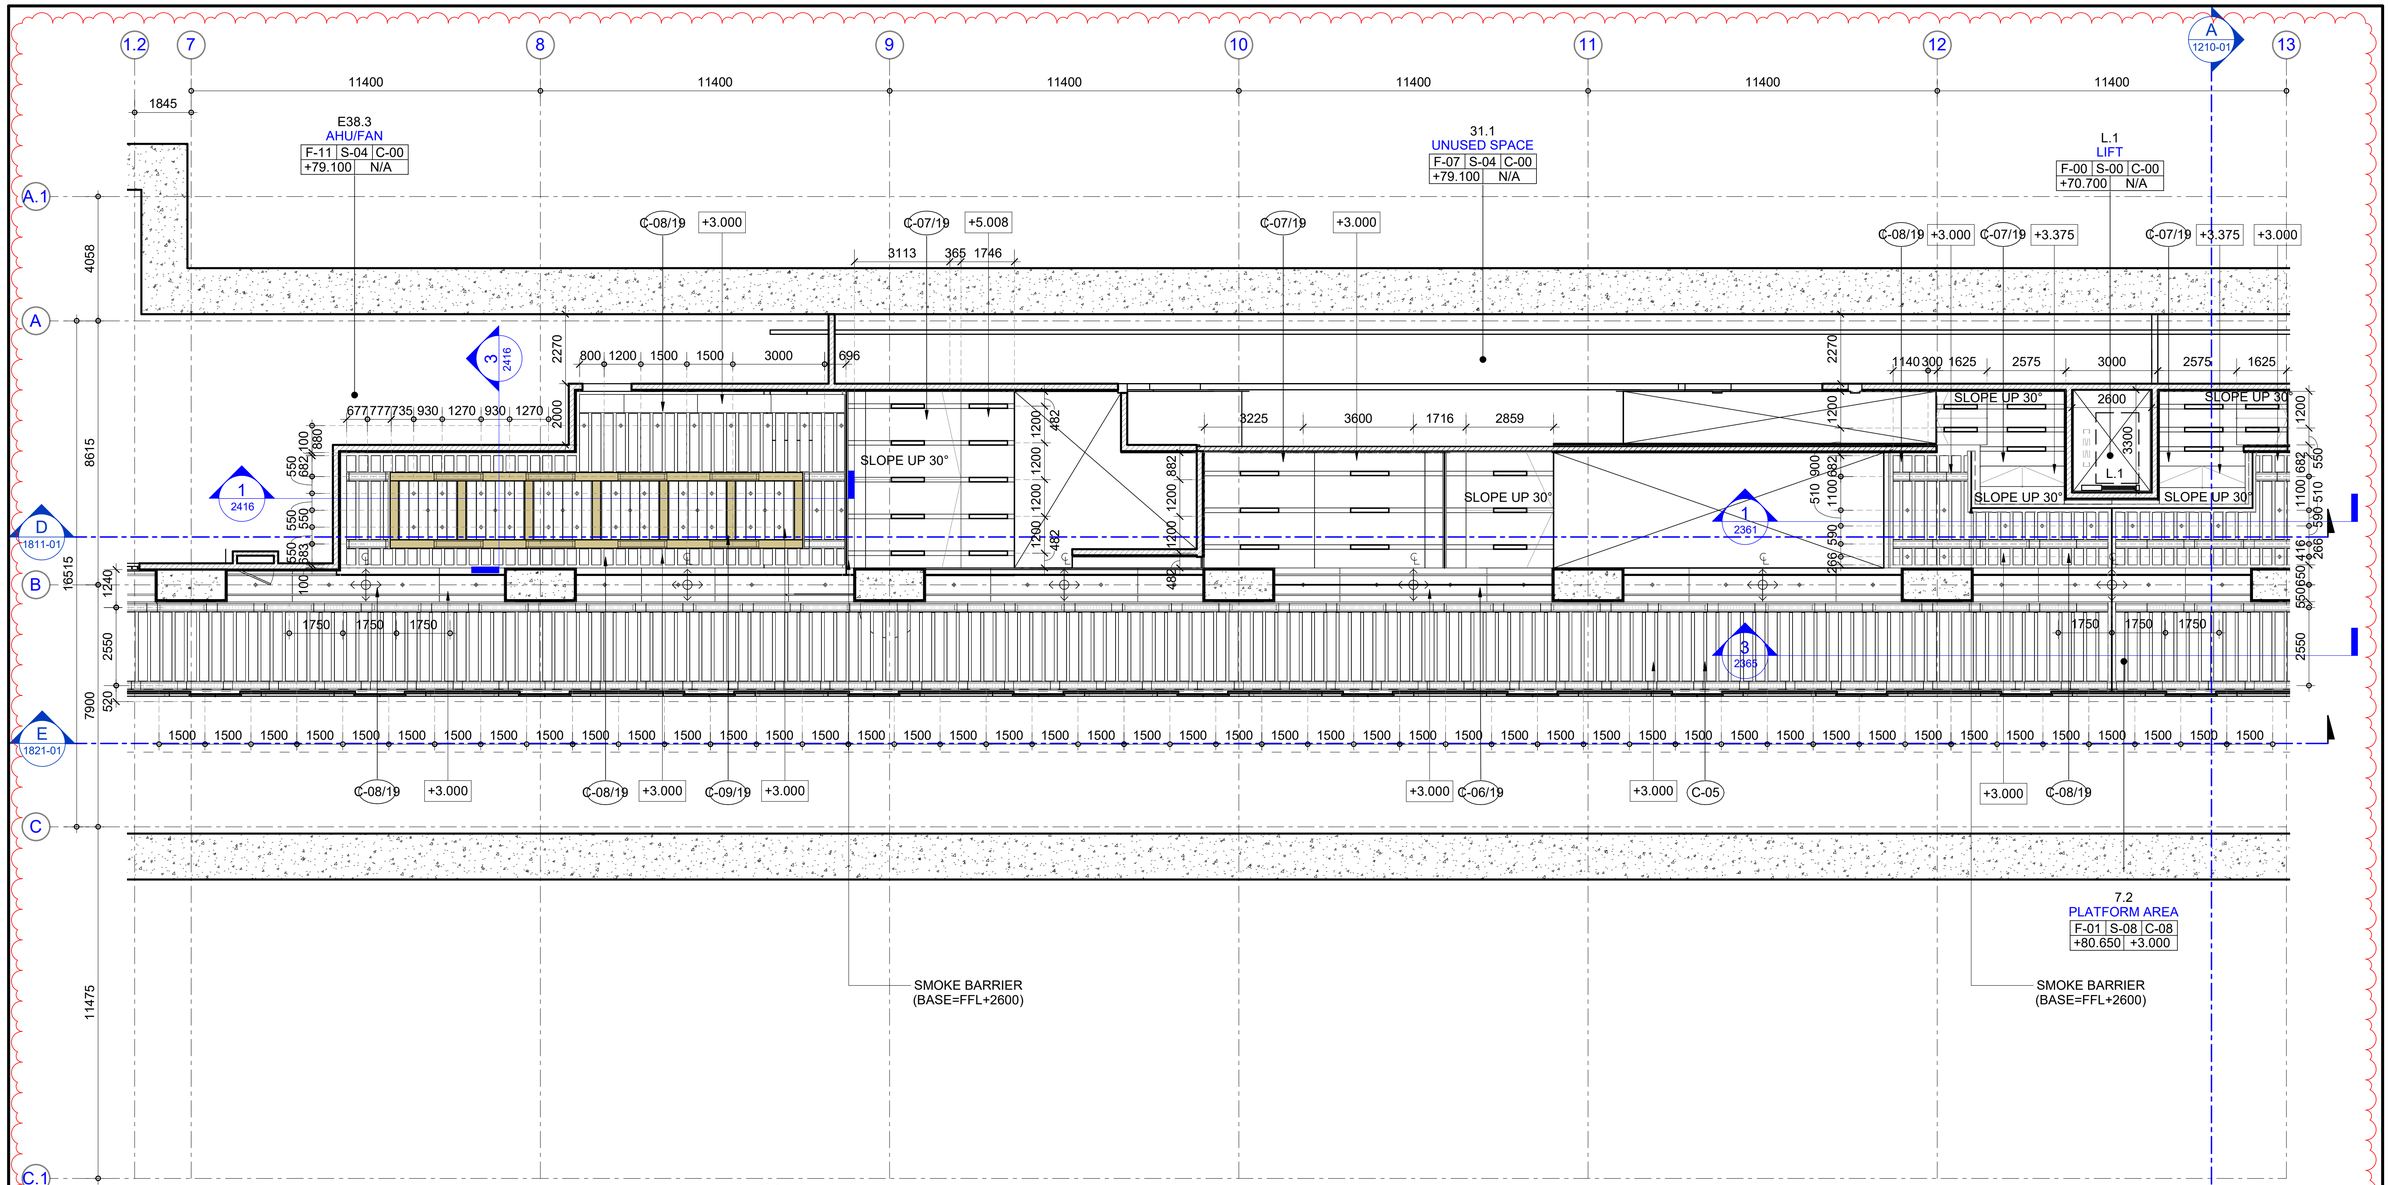

1 ENLARGED UPPER PLATFORM LEVEL - REFLECTED CEILING PLAN - SHEET 2

SCALE 1 : 100

NOTES :

1. ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2. LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3. DRAWING TO SCALE WHEN PLOTTED AT A1
4. DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5. ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E&M DRAWINGS, CONTRACT DOCUMENTS AND SPECIFICATIONS
6. FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7. DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
8. BLOCKWORK WALLS/ LIGHT WEIGHT CONCRETE PANEL (LPC) WALL TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN
9. FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
10. TO BE READ IN CONJUNCTION WITH SUBM. NO. 1-PROJ-AR-2311-1 & GRAPHIC DESIGN PACKAGE.

LEGENDS :

FLOOR FINISH NUMBER — ROOM NUMBER — ROOM NAME — CEILING TYPE — SKIRTING TYPE — CEILING HEIGHT FROM FFL — FINISHED FLOOR LEVEL

F-00 | S-00 | C-00
+00.000 | +0.000

REFER TO 'OPERATION ROOMS' DETAIL DWG. NO. 1-PP19-AR-5XXX-1

X PP19-AR-XXXX-01 — REFER TO SUBM. NO. 1-PP19-AR-XXXX-1

X XXXX — REFER TO SUBM. NO. 1-PROJ-AR-2311-1 & 1-PROJ-AR-2321-1

FINISHES CODE :

CEILINGS

- **C-00** NO CEILING, EXPOSED CONCRETE
- **C-01** NO CEILING, ACRYLIC INTERIOR PAINT
- **C-02** 600X600 SOLID ALUMN CEILING PANEL
- **C-03** 600X600 PERFORATED ALUMN CEILING PANEL
- **C-04** (ADIT) & C-05 (PSD) & C-08 (CONCOURSE/ PLATFORM) 300MM (W) PARTIAL PERFORATED ALUMN CEILING PLANK WITH ACOUSTIC NON-WOVEN BACKING [MIN. 25% FREE AREA] C/W 200MM (W) ALUMN CEILING RUNNER
- **C-06** SOLID ALUMN CEILING PANEL
- **C-07** 1200MM (W) SOLID ALUMN CEILING PANEL
- **C-09** 300MM (W) SOLID ALUMN CEILING PANEL C/W ALUMN GRID RUNNER
- **C-10** FEATURE CEILING : 300MM (W) SOLID ALUMN CEILING PANEL WITH PRINTED PATTERN C/W STEPPING CEILING ON 4-SIDE
- **C-11** 1500 MM (W) SOLID ALUMN CEILING PANEL

NOTES:
1. ALL ALUMN WORKS TO BE IN POWDER COATING FINISH, OTHERWISE STATED.

CEILING FINISHES :

- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- SOLID ALUMN CEILING
- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- 300MM (W) ALUMN CEILING WITH PRINTED GRAPHIC
- SOLID ALUMN CEILING
- SOLID ALUMN GRID RUNNERS
- SOLID ALUMN TRIMMING / STEPPING ALUMN CEILING

LEGENDS FOR E&M FIXTURES:

- RECESSED DOWNLIGHT
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ DISFUSSER
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ LOUVRE
- 300x600 DB. RECESSED FLUORESCENT W/ LOUVRE
- RECESSED WALL MOUNT LIGHT
- SURFACED WALL MOUNT LIGHT [L1: ROUND SHAPE, L2: SQUARE SHAPE]

NOTES:
1. ALL ALUMN CEILING RUNNER TO BE IN 'DARK GREY' COLOUR

- 1200x600 & 600x600 RETURN AIR GRILLE
- 600x600 SUPPLY AIR DIFFUSER
- SMOKE / HEAT DETECTOR
- SPRINKLER HEAD
- LAMP POST
- LAMP POST
- LED STRIP LIGHT
- 1200x200MM SUPPLY / RETURN AIR DIFFUSER

GRAPHIC SCALE 0 1 2 5 10 M. — 1:100

KEY PLAN

B

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
PMCSC1
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMCSC1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE
STECON
DESIGNER: AECOM
TEAM Consulting Engineering and Management Co.,Ltd.
GFE The Geotechnical Expert

DESIGNER	OYT		
DESIGN CHECKED	AJT		
PROJECT MANAGER	LCC		

REV.	DATE	REVISIONS	DWG.	CHK.	APP.
B	24-01-25	CRD UPDATED	LCC	OYT	AJT
A	19-04-24	CRD	LCC	OYT	AJT


PURPLE LINE PROJECT
CONTRACT 1: UNDERGROUND CIVIL WORKS

SCALE : A1 = 1:100, A3 = 1:200
UNITS : mm.
DATE : 19-04-2024

PP19 : VAJIRA HOSPITAL STATION
UPPER PLATFORM LEVEL - REFLECTED CEILING PLAN SHEET 2

STATUS : C
DRAWING NO. 1-PP19-AR-4261-01
REVISION : B
SHEET NO.

1/24/2025 11:32:19 AM Autodesk Docs://Purple Line Extension/PPL-C-DPAR-1-PP19-AR-M3-0001.rvt

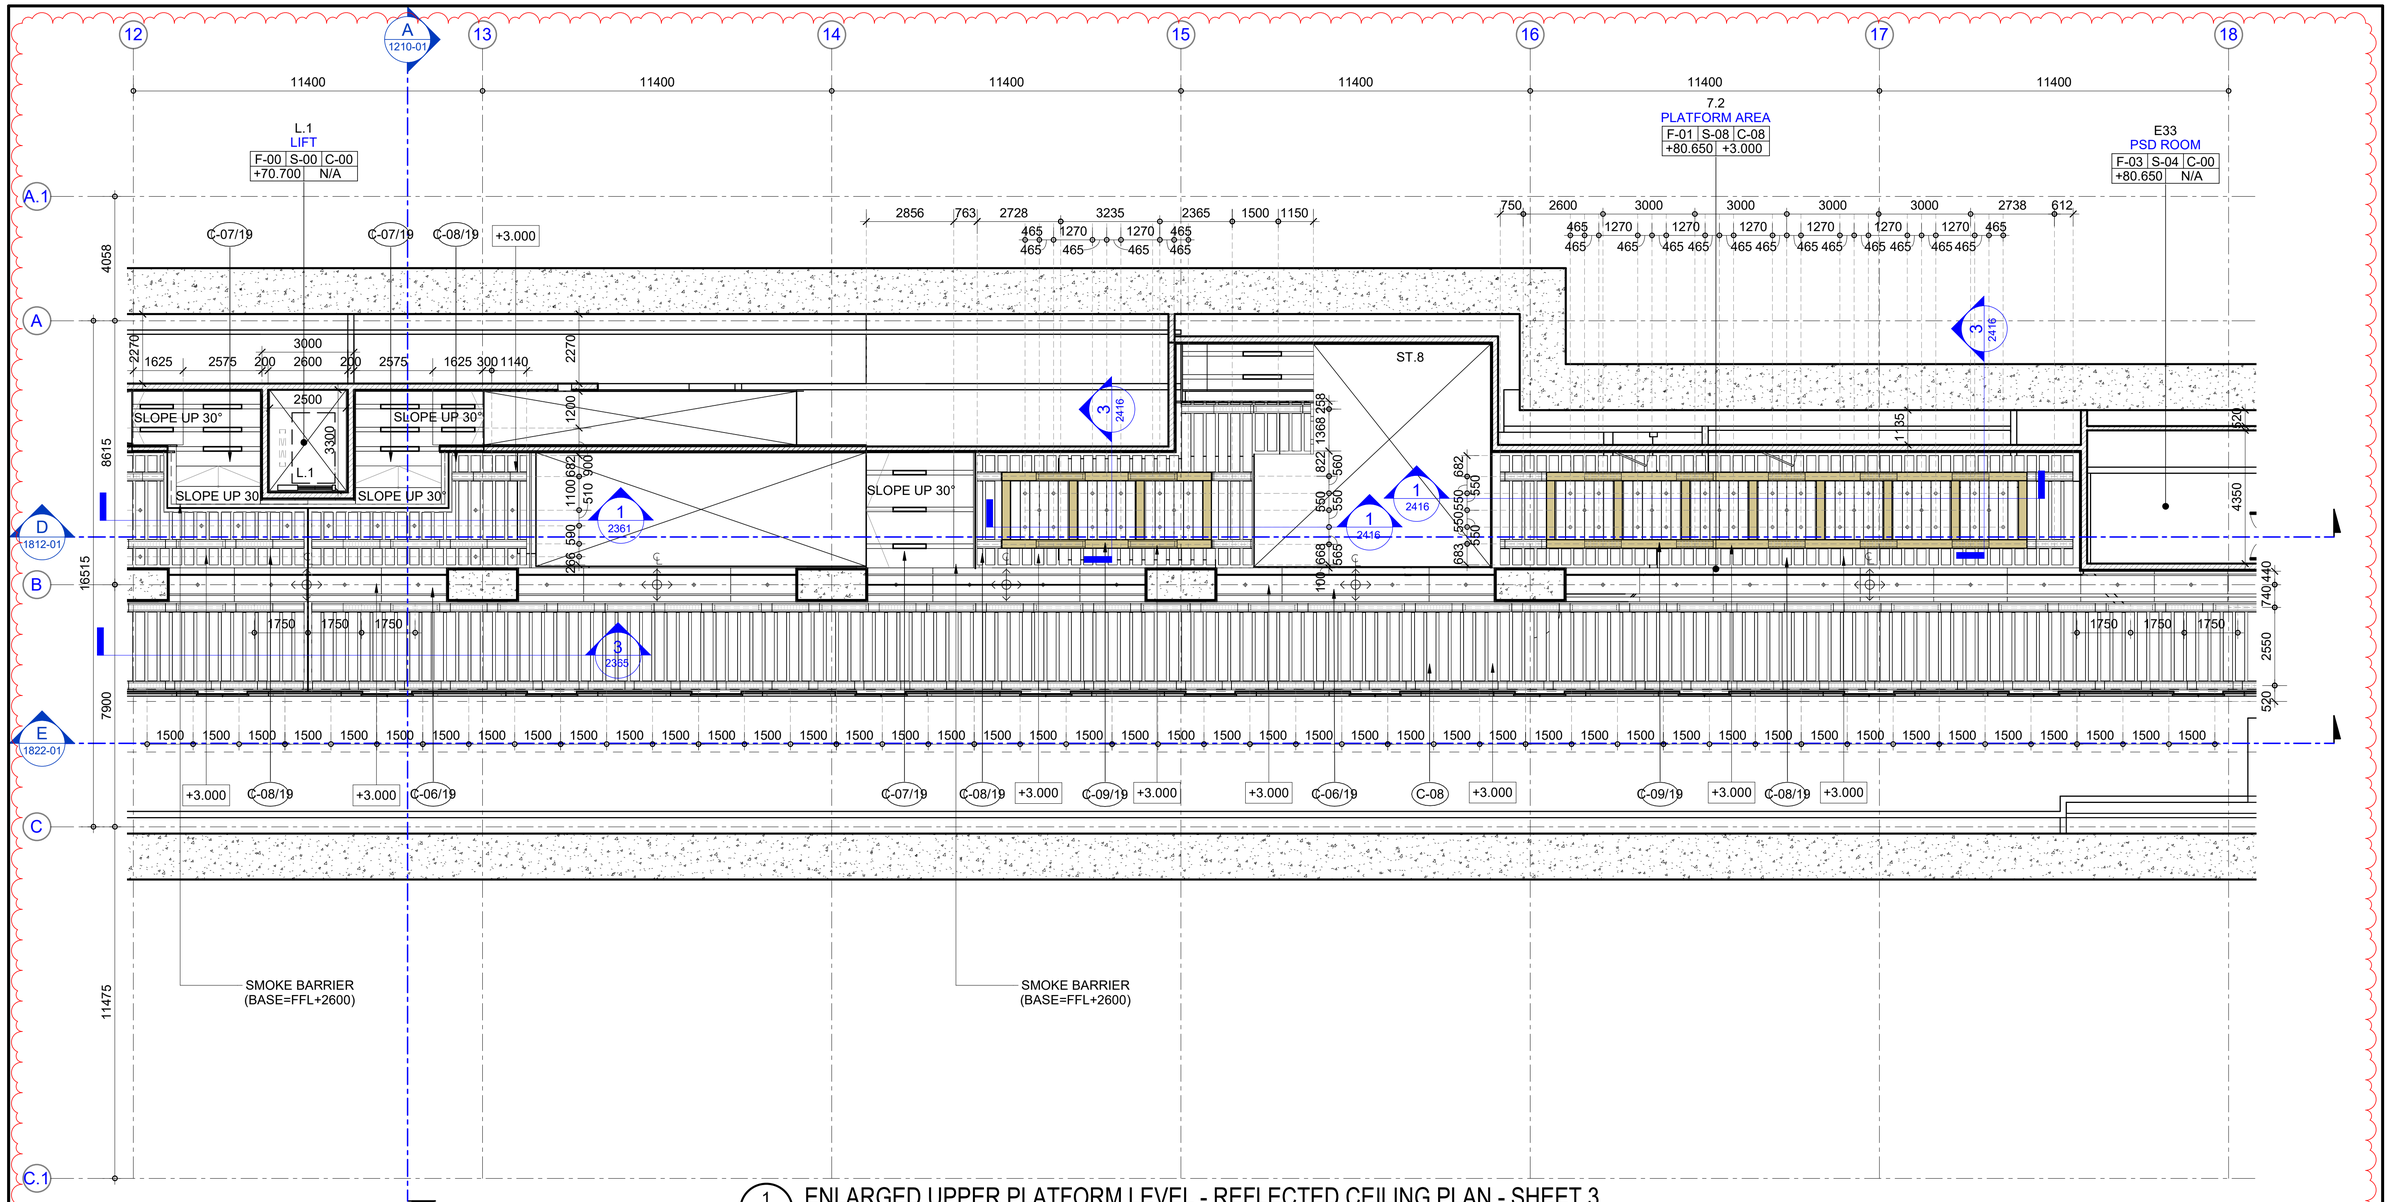

1 — ENLARGED UPPER PLATFORM LEVEL - REFLECTED CEILING PLAN - SHEET 3

SCALE 1 : 100

NOTES :

1. ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2. LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3. DRAWING TO SCALE WHEN PLOTTED AT A1
4. DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5. ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E&M DRAWINGS, CONTRACT DOCUMENTS AND SPECIFICATIONS
6. FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7. DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
8. BLOCKWORK WALLS/ LIGHT WEIGHT CONCRETE PANEL (LPC) WALL TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN
9. FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
10. TO BE READ IN CONJUNCTION WITH SUBM. NO. 1-PROJ-AR-2311-1 & GRAPHIC DESIGN PACKAGE.

LEGENDS :

FLOOR FINISH LEVEL — ROOM NUMBER / ROOM NAME — CEILING TYPE — SKIRTING TYPE — CEILING HEIGHT FROM FFL

F-00 | S-00 | C-00
+00.000 | +0.000

REFER TO 'OPERATION ROOMS' DETAIL DWG. NO. 1-PP19-AR-5XXX-1

X / PP19-AR-XXXX-01 — REFER TO SUBM. NO. 1-PP19-AR-XXXX-1

X / XXXX — REFER TO SUBM. NO. 1-PROJ-AR-2311-1 & 1-PROJ-AR-2321-1

FINISHES CODE :

CEILINGS

C-00 NO CEILING, EXPOSED CONCRETE
C-01 NO CEILING, ACRYLIC INTERIOR PAINT
C-02 600X600 SOLID ALUMN CEILING PANEL
C-03 600X600 PERFORATED ALUMN CEILING PANEL
C-04 (ADIT) & C-05 (PSD) & C-08 (CONCOURSE/ PLATFORM) 300MM (W) PARTIAL PERFORATED ALUMN CEILING PLANK WITH ACOUSTIC NON-WOVEN BACKING [MIN. 25% FREE AREA] C/W 200MM (W) ALUMN CEILING RUNNER
C-06 SOLID ALUMN CEILING PANEL
C-07 1200MM (W) SOLID ALUMN CEILING PANEL
C-09 300MM (W) SOLID ALUMN CEILING PANEL C/W ALUMN GRID RUNNER
C-10 FEATURE CEILING : 300MM (W) SOLID ALUMN CEILING PANEL WITH PRINTED PATTERN C/W STEPPING CEILING ON 4-SIDE
C-11 1500 MM (W) SOLID ALUMN CEILING PANEL

NOTES:
1. ALL ALUMN WORKS TO BE IN POWDER COATING FINISH, OTHERWISE STATED.

CEILING FINISHES :

- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- SOLID ALUMN CEILING
- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- 300MM (W) ALUMN CEILING WITH PRINTED GRAPHIC
- SOLID ALUMN CEILING
- SOLID ALUMN GRID RUNNERS
- SOLID ALUMN TRIMMING / STEPPING ALUMN CEILING

LEGENDS FOR E&M FIXTURES:


- RECESSED DOWNLIGHT
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ DISFUSSER
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ LOUVRE
- 300x600 DB. RECESSED FLUORESCENT W/ LOUVRE
- RECESSED WALL MOUNT LIGHT
- SURFACED WALL MOUNT LIGHT [L1: ROUND SHAPE, L2: SQUARE SHAPE] (L1)

NOTES:
1. ALL ALUMN CEILING RUNNER TO BE IN 'DARK GREY' COLOUR

- 1200x600 & 600x600 RETURN AIR GRILLE
- 1200x200MM SUPPLY / RETURN AIR DIFFUSER
- 600x600 SUPPLY AIR DIFFUSER
- SMOKE / HEAT DETECTOR
- SPRINKLER HEAD
- LAMP POST
- LAMP POST
- LED STRIP LIGHT

GRAPHIC SCALE 0 1 2 5 10 M. — 1:100

KEY PLAN



B

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
PMCSC1
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMSCS1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE
STECON

DESIGNER: AECOM
TEAM Consulting Engineering and Management Co.,Ltd.
GFE The Geotechnical Expert


			REV.	DATE	REVISIONS	DWG.	CHK.	APP.
DESIGNER		OYT						
DESIGN CHECKED		AJT	B	24-01-25	CRD UPDATED	LCC	OYT	AJT
PROJECT MANAGER		LCC	A	19-04-24	CRD	LCC	OYT	AJT

PURPLE LINE PROJECT
CONTRACT 1: UNDERGROUND CIVIL WORKS

SCALE : A1 = 1:100, A3 = 1:200
UNITS : mm.
DATE : 19-04-2024
STATUS : C
DRAWING NO. : 1-PP19-AR-4262-01
REVISION : B
SHEET NO. :

PP19 : VAJIRA HOSPITAL STATION
UPPER PLATFORM LEVEL - REFLECTED CEILING PLAN
SHEET 3

1/24/2025 11:32:27 AM Autodesk Docs://Purple Line Extension/PPL-C-DPAR-1-PP19-AR-M3-0001.rvt

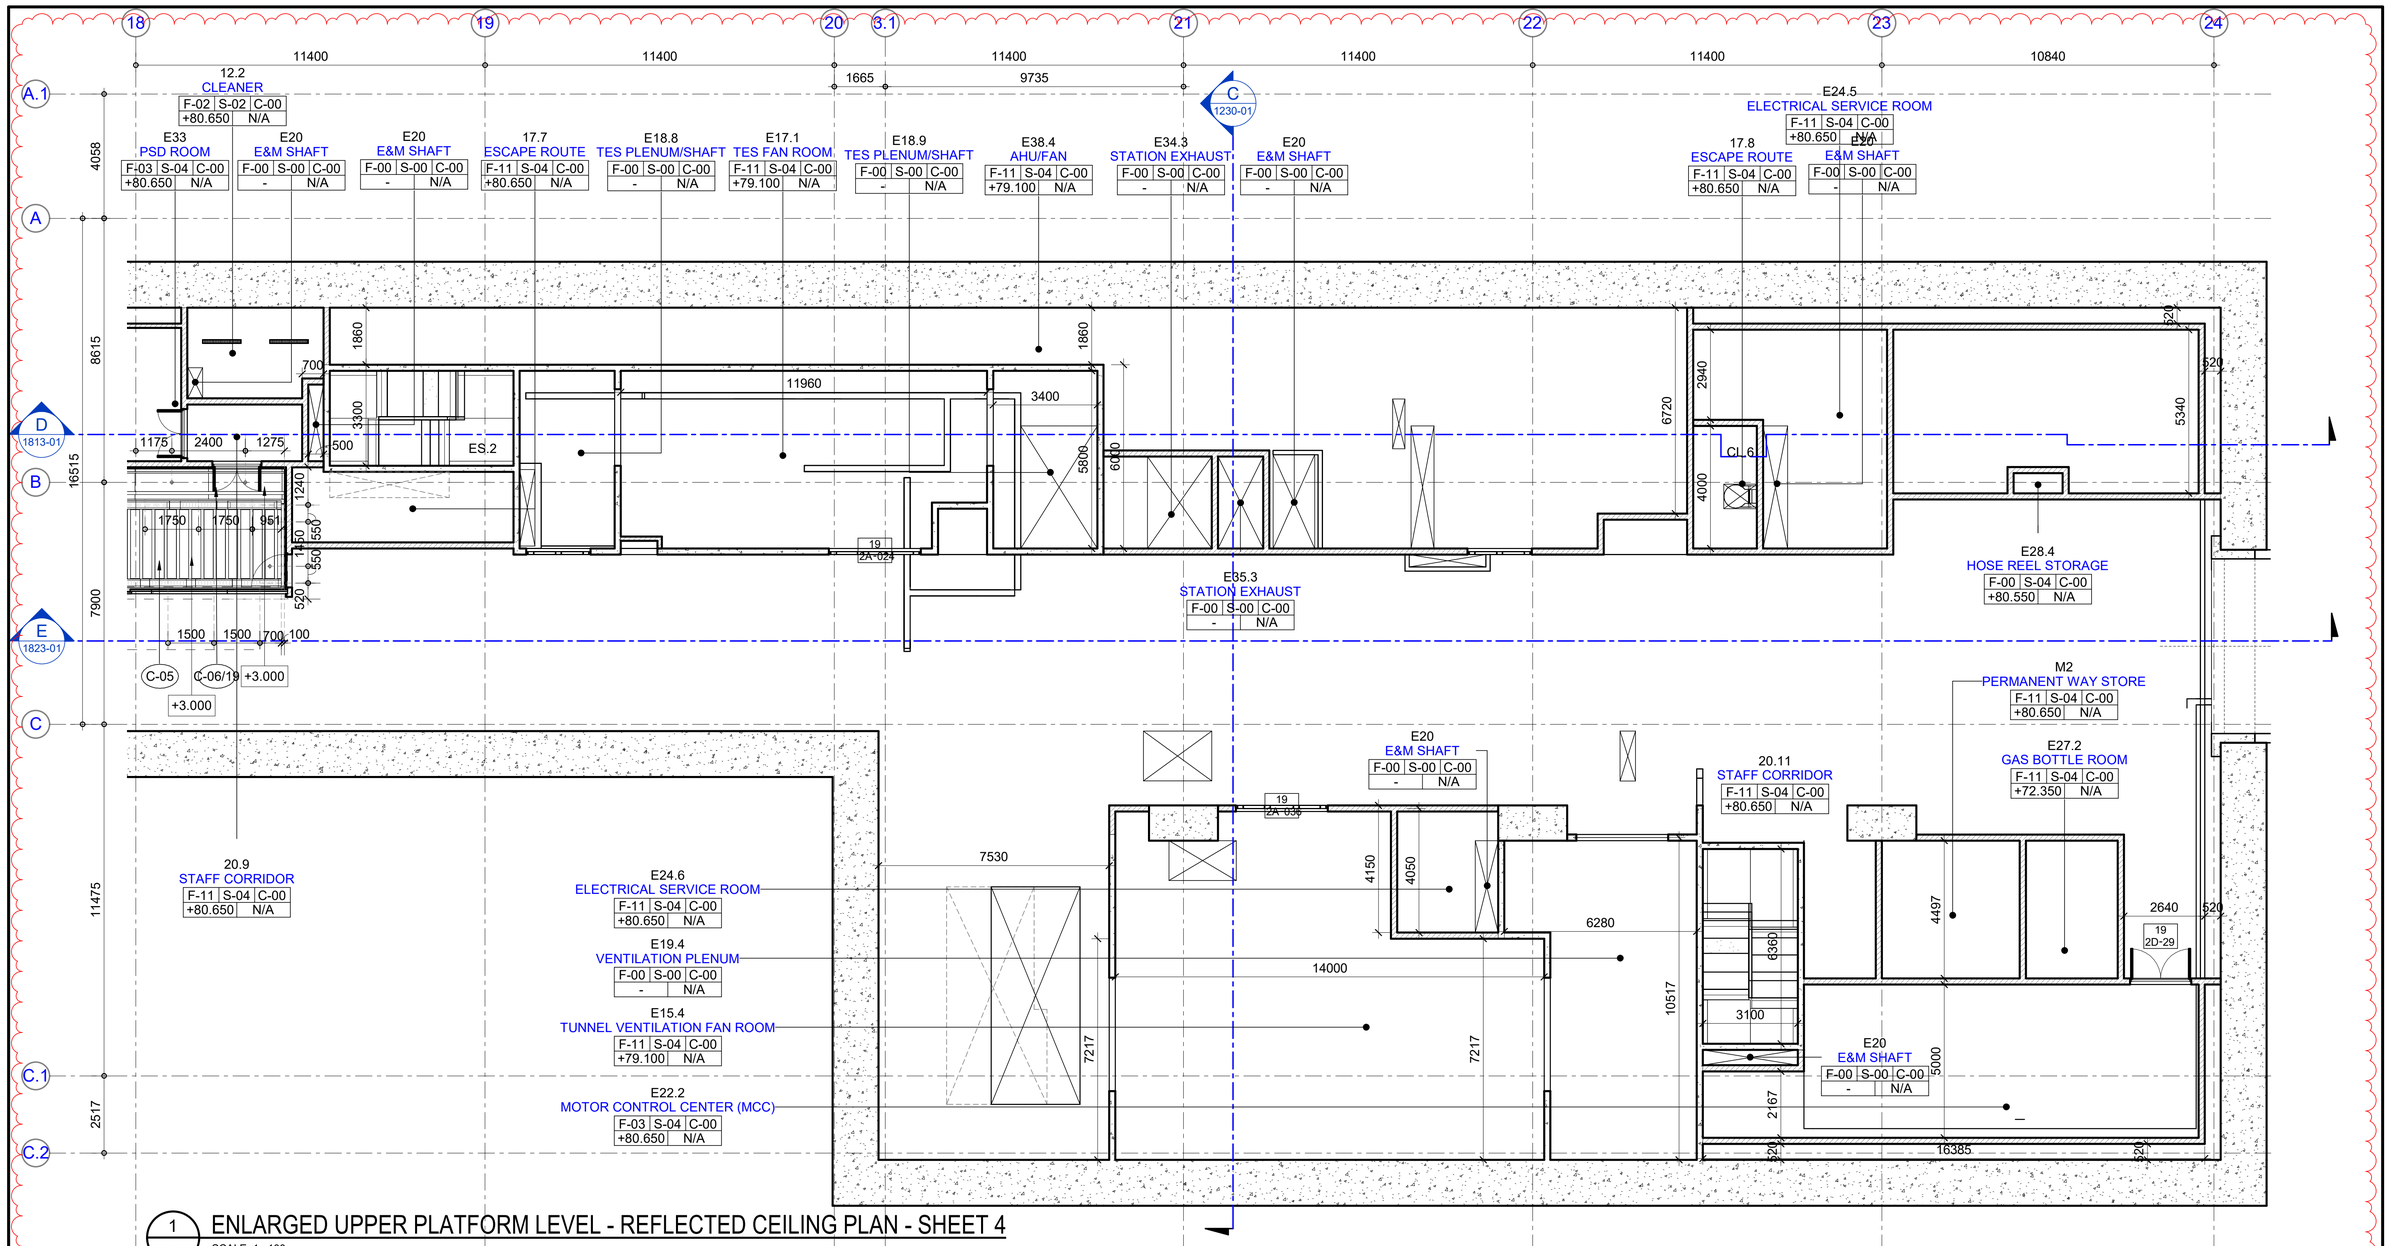

1 ENLARGED UPPER PLATFORM LEVEL - REFLECTED CEILING PLAN - SHEET 4

SCALE 1 : 100

NOTES :

1. ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2. LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3. DRAWING TO SCALE WHEN PLOTTED AT A1
4. DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5. ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E&M DRAWINGS, CONTRACT DOCUMENTS AND SPECIFICATIONS
6. FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7. DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
8. BLOCKWORK WALLS/ LIGHT WEIGHT CONCRETE PANEL (LPC) WALL TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN
9. FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
10. TO BE READ IN CONJUNCTION WITH SUBM. NO. 1-PROJ-AR-2311-1 & GRAPHIC DESIGN PACKAGE.

LEGENDS :

FLOOR FINISH NUMBER — ROOM NUMBER — ROOM NAME — CEILING TYPE — SKIRTING TYPE (F-00 S-00 C-00 / +00.000 +0.000) — FINISHED FLOOR LEVEL — CEILING HEIGHT FROM FFL

REFER TO 'OPERATION ROOMS' DETAIL DWG. NO. 1-PP19-AR-5XXX-1

X / PP19-AR-XXXX-01 — REFER TO SUBM. NO. 1-PP19-AR-XXXX-1

X / XXXX — REFER TO SUBM. NO. 1-PROJ-AR-2311-1 & 1-PROJ-AR-2321-1

FINISHES CODE :

CEILINGS

- **C-00** NO CEILING, EXPOSED CONCRETE
- **C-01** NO CEILING, ACRYLIC INTERIOR PAINT
- **C-02** 600X600 SOLID ALUMN CEILING PANEL
- **C-03** 600X600 PERFORATED ALUMN CEILING PANEL
- **C-04** (ADIT) & C-05 (PSD) & C-08 (CONCOURSE/ PLATFORM) 300MM (W) PARTIAL PERFORATED ALUMN CEILING PLANK WITH ACOUSTIC NON-WOVEN BACKING [MIN. 25% FREE AREA] C/W 200MM (W) ALUMN CEILING RUNNER
- **C-06** SOLID ALUMN CEILING PANEL
- **C-07** 1200MM (W) SOLID ALUMN CEILING PANEL
- **C-09** 300MM (W) SOLID ALUMN CEILING PANEL C/W ALUMN GRID RUNNER
- **C-10** FEATURE CEILING : 300MM (W) SOLID ALUMN CEILING PANEL WITH PRINTED PATTERN C/W STEPPING CEILING ON 4-SIDE
- **C-11** 1500 MM (W) SOLID ALUMN CEILING PANEL

NOTES:
1. ALL ALUMN WORKS TO BE IN POWDER COATING FINISH, OTHERWISE STATED.

CEILING FINISHES :

- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- SOLID ALUMN CEILING
- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- 300MM (W) ALUMN CEILING WITH PRINTED GRAPHIC
- SOLID ALUMN CEILING
- SOLID ALUMN GRID RUNNERS
- SOLID ALUMN TRIMMING / STEPPING ALUMN CEILING

LEGENDS FOR E&M FIXTURES:

- RECESSED DOWNLIGHT
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ DISFUSSER
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ LOUVRE
- 300x600 DB. RECESSED FLUORESCENT W/ LOUVRE
- RECESSED WALL MOUNT LIGHT
- SURFACED WALL MOUNT LIGHT [L1: ROUND SHAPE, L2: SQUARE SHAPE] (L1)
- 1200x600 & 600x600 RETURN AIR GRILLE
- 600x600 SUPPLY AIR DIFFUSER
- SMOKE / HEAT DETECTOR
- SPRINKLER HEAD
- LAMP POST
- LAMP POST
- LED STRIP LIGHT
- 1200x200MM SUPPLY / RETURN AIR DIFFUSER

NOTES:
1. ALL ALUMN CEILING RUNNER TO BE IN 'DARK GREY' COLOUR

GRAPHIC SCALE 0 1 2 5 10 M. — 1:100

KEY PLAN

B

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
PMCSC1
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMSCS1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE
DESIGNER: AECOM

DESIGNER		OYT
DESIGN CHECKED		AJT
PROJECT MANAGER		LCC


REV.	DATE	REVISIONS	DWG.	CHK.	APP.
B	24-01-25	CRD UPDATED	LCC	OYT	AJT
A	19-04-24	CRD	LCC	OYT	AJT

PURPLE LINE PROJECT
CONTRACT 1: UNDERGROUND CIVIL WORKS

SCALE : A1 = 1:100, A3 = 1:200
UNITS : mm.
DATE : 19-04-2024
STATUS : C
DRAWING NO. : 1-PP19-AR-4263-01
REVISION : B
SHEET NO. :

PP19 : VAJIRA HOSPITAL STATION
UPPER PLATFORM LEVEL - REFLECTED CEILING PLAN
SHEET 4

1/24/2025 11:32:42 AM Autodesk Docs://Purple Line Extension/PPL-C-DPAR-1-PP19-AR-MJ-0001.rvt

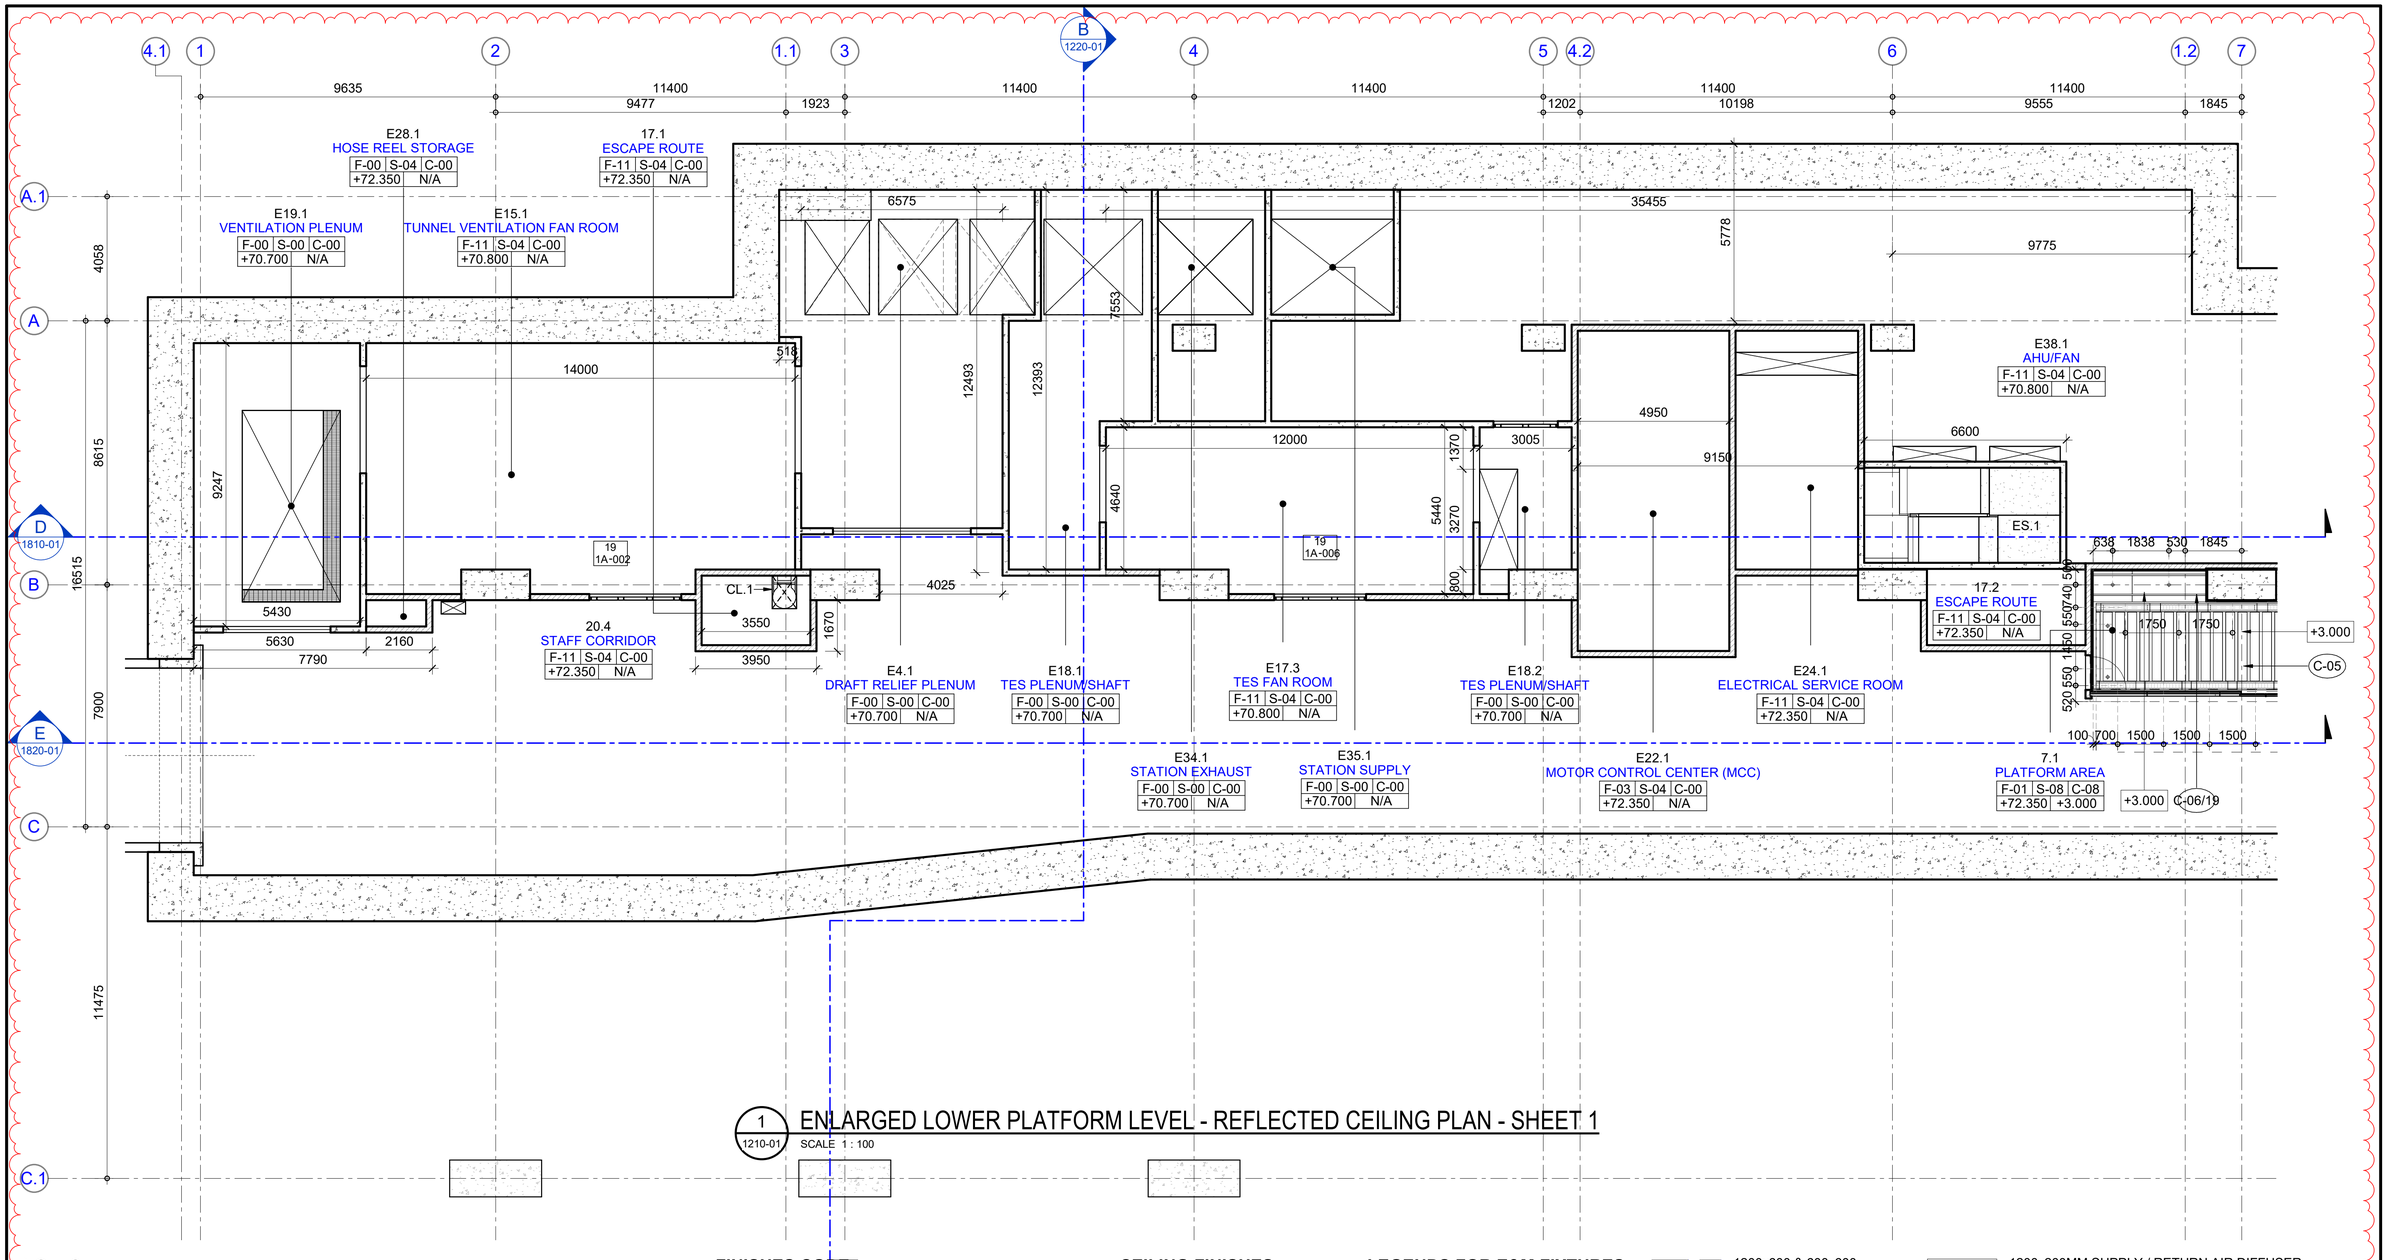

1 ENLARGED LOWER PLATFORM LEVEL - REFLECTED CEILING PLAN - SHEET 1

1210-01 SCALE 1 : 100

NOTES :

1. ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2. LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3. DRAWING TO SCALE WHEN PLOTTED AT A1
4. DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5. ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E&M DRAWINGS, CONTRACT DOCUMENTS AND SPECIFICATIONS
6. FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7. DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
8. BLOCKWORK WALLS/ LIGHT WEIGHT CONCRETE PANEL (LPC) WALL TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN
9. FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
10. TO BE READ IN CONJUNCTION WITH SUBM. NO. 1-PROJ-AR-2311-1 & GRAPHIC DESIGN PACKAGE.

LEGENDS :

FLOOR FINISH LEVEL — ROOM NUMBER — ROOM NAME — CEILING TYPE — SKIRTING TYPE — CEILING HEIGHT FROM FFL

F-00 S-00 C-00 +00.000 +0.000

REFER TO 'OPERATION ROOMS' DETAIL DWG. NO. 1-PP19-AR-5XXX-1

X PP19-AR-XXXX-01 REFER TO SUBM. NO. 1-PP19-AR-XXXX-1

X XXXX REFER TO SUBM. NO. 1-PROJ-AR-2311-1 & 1-PROJ-AR-2321-1

FINISHES CODE :

CEILINGS

- **C-00** NO CEILING, EXPOSED CONCRETE
- **C-01** NO CEILING, ACRYLIC INTERIOR PAINT
- **C-02** 600X600 SOLID ALUMN CEILING PANEL
- **C-03** 600X600 PERFORATED ALUMN CEILING PANEL
- **C-04** (ADIT) & C-05 (PSD) & C-08 (CONCOURSE/ PLATFORM) 300MM (W) PARTIAL PERFORATED ALUMN CEILING PLANK WITH ACOUSTIC NON-WOVEN BACKING [MIN. 25% FREE AREA] C/W 200MM (W) ALUMN CEILING RUNNER
- **C-06** SOLID ALUMN CEILING PANEL
- **C-07** 1200MM (W) SOLID ALUMN CEILING PANEL
- **C-09** 300MM (W) SOLID ALUMN CEILING PANEL C/W ALUMN GRID RUNNER
- **C-10** FEATURE CEILING : 300MM (W) SOLID ALUMN CEILING PANEL WITH PRINTED PATTERN C/W STEPPING CEILING ON 4-SIDE
- **C-11** 1500 MM (W) SOLID ALUMN CEILING PANEL

NOTES:
1. ALL ALUMN WORKS TO BE IN POWDER COATING FINISH, OTHERWISE STATED.

CEILING FINISHES :

- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- SOLID ALUMN CEILING
- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- 300MM (W) ALUMN CEILING WITH PRINTED GRAPHIC
- SOLID ALUMN CEILING
- SOLID ALUMN GRID RUNNERS
- SOLID ALUMN TRIMMING / STEPPING ALUMN CEILING


LEGENDS FOR E&M FIXTURES:

- RECESSED DOWNLIGHT
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ DISFUSSER
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ LOUVRE
- 300x600 DB. RECESSED FLUORESCENT W/ LOUVRE
- RECESSED WALL MOUNT LIGHT
- SURFACED WALL MOUNT LIGHT [L1: ROUND SHAPE, L2: SQUARE SHAPE] (L1)
- 1200x600 & 600x600 RETURN AIR GRILLE
- 600x600 SUPPLY AIR DIFFUSER
- SMOKE / HEAT DETECTOR
- SPRINKLER HEAD
- LAMP POST
- LAMP POST
- LED STRIP LIGHT
- 1200x200MM SUPPLY / RETURN AIR DIFFUSER

NOTES:
1. ALL ALUMN CEILING RUNNER TO BE IN 'DARK GREY' COLOUR

GRAPHIC SCALE 0 1 2 5 10 M. — 1:100

KEY PLAN

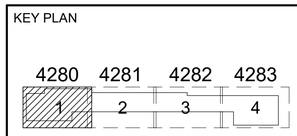

B

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
PMCSC1
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMCSC1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE
STECON
DESIGNER: AECOM
TEAM Consulting Engineering and Management Co.,Ltd.
GFE The Geotechnical Expert

DESIGNER		OYT						
DESIGN CHECKED		AJT						
PROJECT MANAGER		LCC	B	24-01-25	CRD UPDATED	LCC	OYT	AJT
			A	19-04-24	CRD	LCC	OYT	AJT
			REV.	DATE	REVISIONS	DWG.	CHK.	APP.

PURPLE LINE PROJECT


CONTRACT 1: UNDERGROUND CIVIL WORKS

SCALE : A1 = 1:100, A3 = 1:200
UNITS : mm.
DATE : 19-04-2024

PP19 : VAJIRA HOSPITAL STATION
LOWER PLATFORM LEVEL - REFLECTED CEILING PLAN
SHEET 1

STATUS : C
DRAWING NO. 1-PP19-AR-4280-01
REVISION : B
SHEET NO.

1/24/2025 11:32:50 AM Autodesk Docs://Purple Line Extension/PPL-C-DPAR-1-PP19-AR-M3-0001.rvt

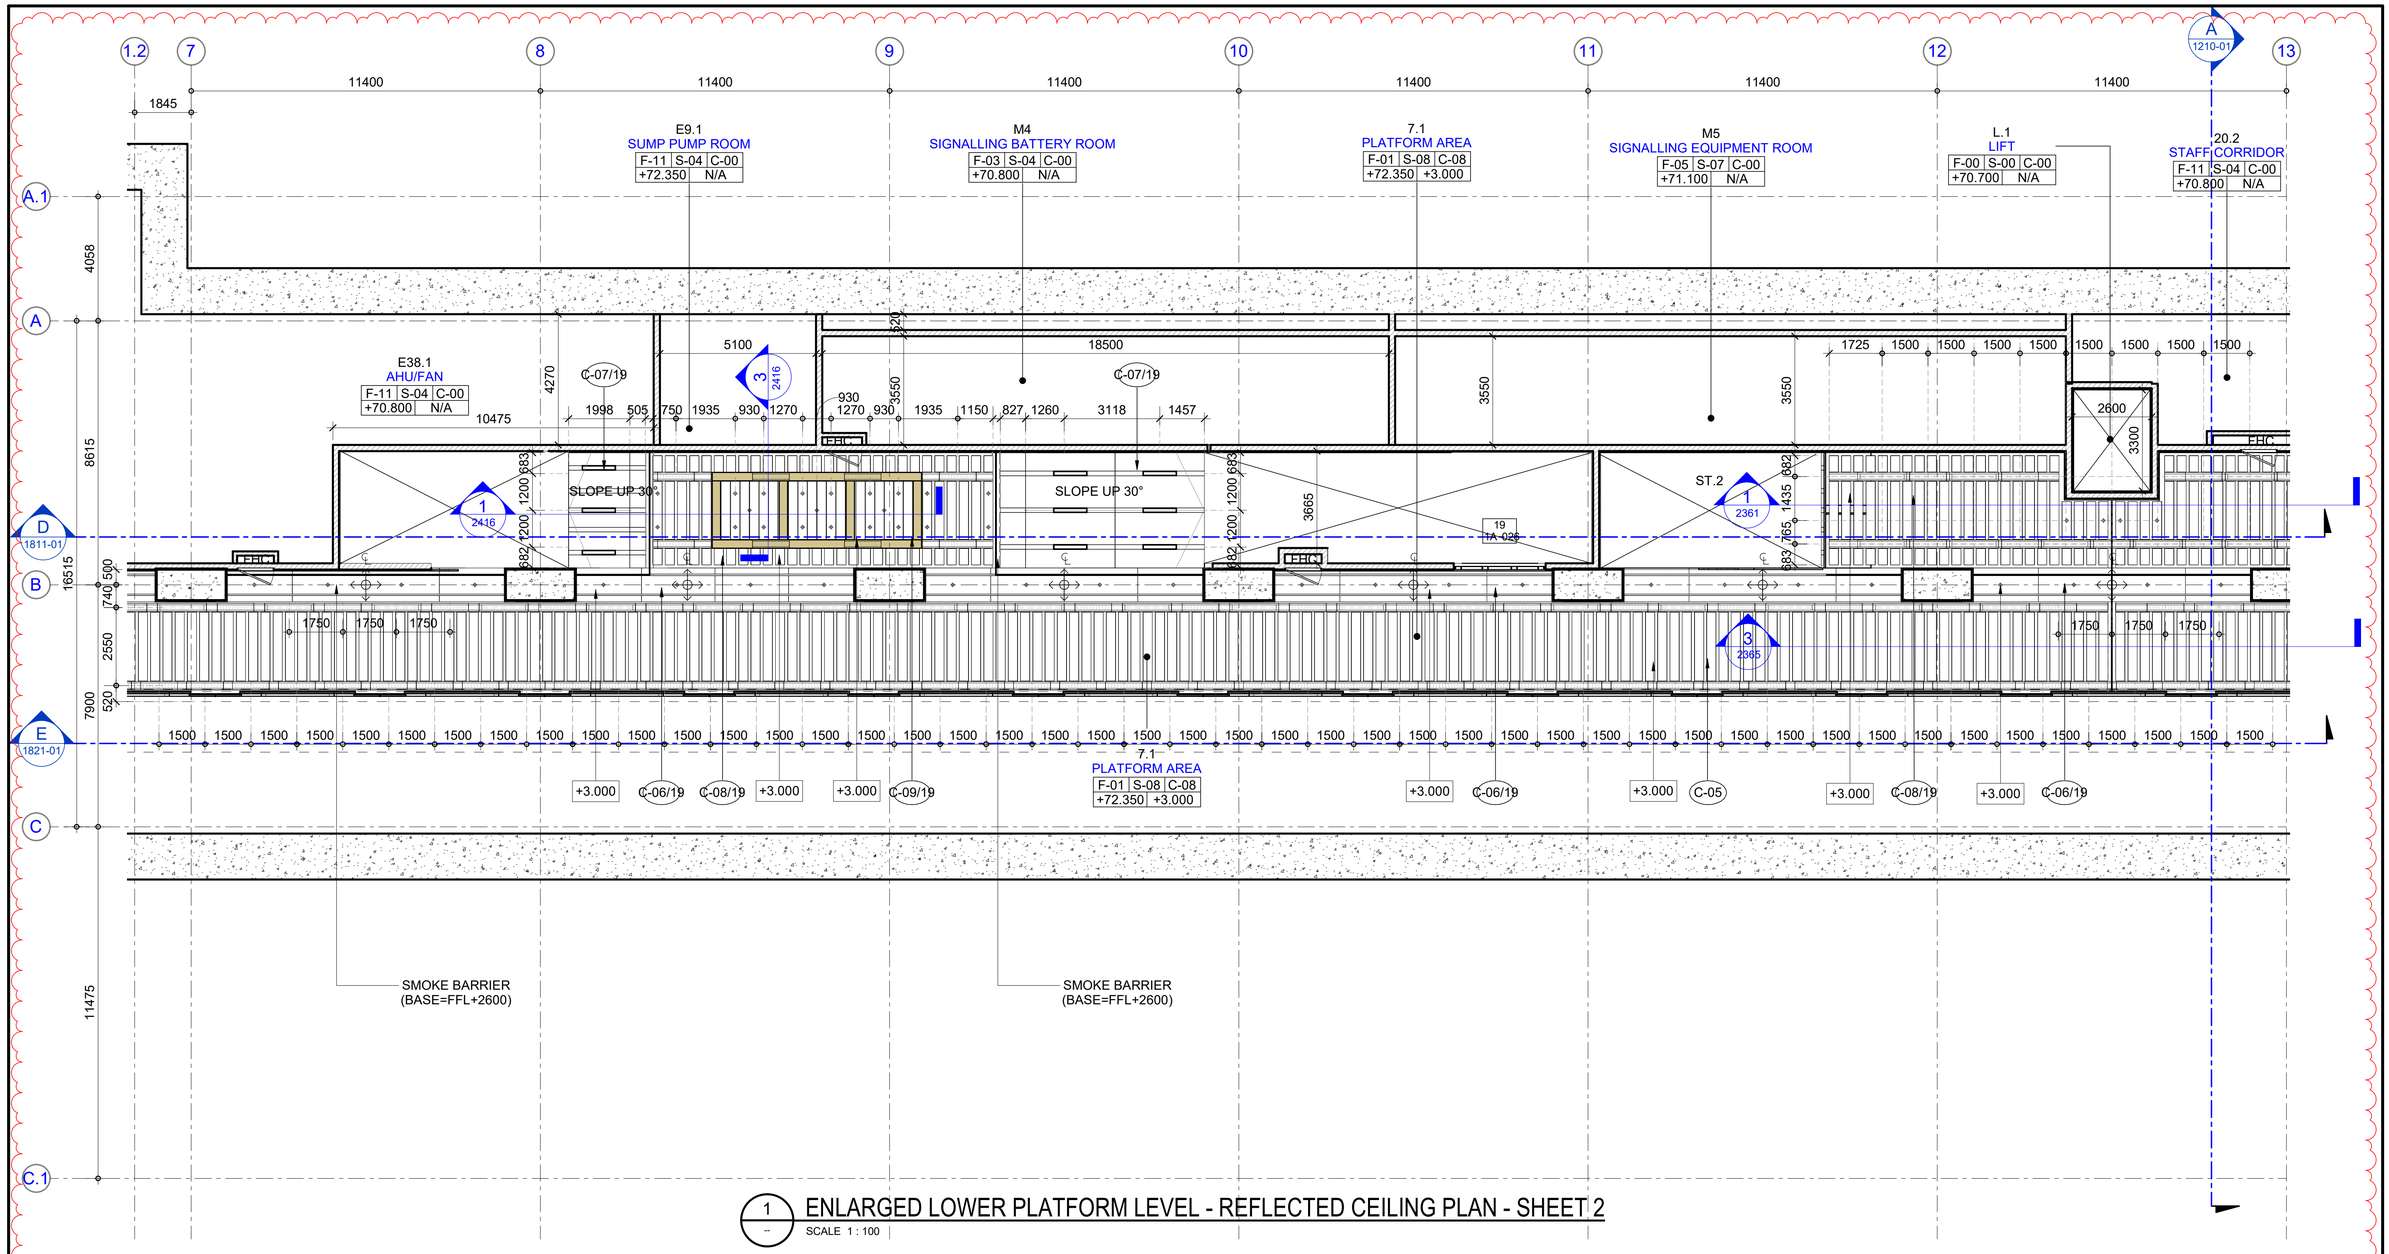

1 -- ENLARGED LOWER PLATFORM LEVEL - REFLECTED CEILING PLAN - SHEET 2

SCALE 1 : 100

NOTES :

1. ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2. LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3. DRAWING TO SCALE WHEN PLOTTED AT A1
4. DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5. ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E&M DRAWINGS, CONTRACT DOCUMENTS AND SPECIFICATIONS
6. FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7. DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
8. BLOCKWORK WALLS/ LIGHT WEIGHT CONCRETE PANEL (LPC) WALL TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN
9. FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
10. TO BE READ IN CONJUNCTION WITH SUBM. NO. 1-PROJ-AR-2311-1 & GRAPHIC DESIGN PACKAGE.

LEGENDS :

FLOOR FINISH NUMBER — ROOM NUMBER / ROOM NAME — CEILING TYPE

F-00 S-00 C-00 — SKIRTING TYPE

+00.000 +0.000 — CEILING HEIGHT FROM FFL

FINISHED FLOOR LEVEL

REFER TO 'OPERATION ROOMS' DETAIL DWG. NO. 1-PP19-AR-5XXX-1

X / PP19-AR-XXXX-01 — REFER TO SUBM. NO. 1-PP19-AR-XXXX-1

X / XXXX — REFER TO SUBM. NO. 1-PROJ-AR-2311-1 & 1-PROJ-AR-2321-1

FINISHES CODE :

CEILINGS

- **C-00** NO CEILING, EXPOSED CONCRETE
- **C-01** NO CEILING, ACRYLIC INTERIOR PAINT
- **C-02** 600X600 SOLID ALUMN CEILING PANEL
- **C-03** 600X600 PERFORATED ALUMN CEILING PANEL
- **C-04** (ADIT) & C-05 (PSD) & C-08 (CONCOURSE/ PLATFORM) 300MM (W) PARTIAL PERFORATED ALUMN CEILING PLANK WITH ACOUSTIC NON-WOVEN BACKING [MIN. 25% FREE AREA] C/W 200MM (W) ALUMN CEILING RUNNER
- **C-06** SOLID ALUMN CEILING PANEL
- **C-07** 1200MM (W) SOLID ALUMN CEILING PANEL
- **C-09** 300MM (W) SOLID ALUMN CEILING PANEL C/W ALUMN GRID RUNNER
- **C-10** FEATURE CEILING : 300MM (W) SOLID ALUMN CEILING PANEL WITH PRINTED PATTERN C/W STEPPING CEILING ON 4-SIDE
- **C-11** 1500 MM (W) SOLID ALUMN CEILING PANEL

NOTES:
1. ALL ALUMN WORKS TO BE IN POWDER COATING FINISH, OTHERWISE STATED.

CEILING FINISHES :

- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- SOLID ALUMN CEILING
- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- 300MM (W) ALUMN CEILING WITH PRINTED GRAPHIC
- SOLID ALUMN CEILING
- SOLID ALUMN GRID RUNNERS
- SOLID ALUMN TRIMMING / STEPPING ALUMN CEILING


LEGENDS FOR E&M FIXTURES:

- RECESSED DOWNLIGHT
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ DISFUSSER
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ LOUVRE
- 300x600 DB. RECESSED FLUORESCENT W/ LOUVRE
- RECESSED WALL MOUNT LIGHT
- SURFACED WALL MOUNT LIGHT [L1: ROUND SHAPE, L2: SQUARE SHAPE] (L1)
- 1200x600 & 600x600 RETURN AIR GRILLE
- 600x600 SUPPLY AIR DIFFUSER
- SMOKE / HEAT DETECTOR
- SPRINKLER HEAD
- LAMP POST
- LAMP POST
- LED STRIP LIGHT
- 1200x200MM SUPPLY / RETURN AIR DIFFUSER

NOTES:
1. ALL ALUMN CEILING RUNNER TO BE IN 'DARK GREY' COLOUR

GRAPHIC SCALE 1:100 (0 1 2 5 10 M.)

KEY PLAN

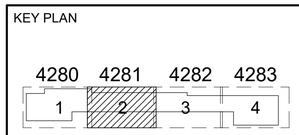

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
PMCSC1
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMSCS1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE
STECON
DESIGNER: AECOM
TEAM Consulting Engineering and Management Co.,Ltd.
GFE The Geotechnical Expert

			REV.	DATE	REVISIONS	DWG.	CHK.	APP.
DESIGNER		OYT						
DESIGN CHECKED		AJT	B	24-01-25	CRD UPDATED	LCC	OYT	AJT
PROJECT MANAGER		LCC	A	19-04-24	CRD	LCC	OYT	AJT


PURPLE LINE PROJECT
CONTRACT 1: UNDERGROUND CIVIL WORKS

SCALE : A1 = 1:100, A3 = 1:200
UNITS : mm.
DATE : 19-04-2024

PP19 : VAJIRA HOSPITAL STATION
LOWER PLATFORM LEVEL - REFLECTED CEILING PLAN
SHEET 2

STATUS :	DRAWING NO.	REVISION :	SHEET NO.
C	1-PP19-AR-4281-01	B	

1/24/2025 11:32:58 AM Autodesk Docs://Purple Line Extension/PPL-C-DPAR-1-PP19-AR-M3-0001.rvt

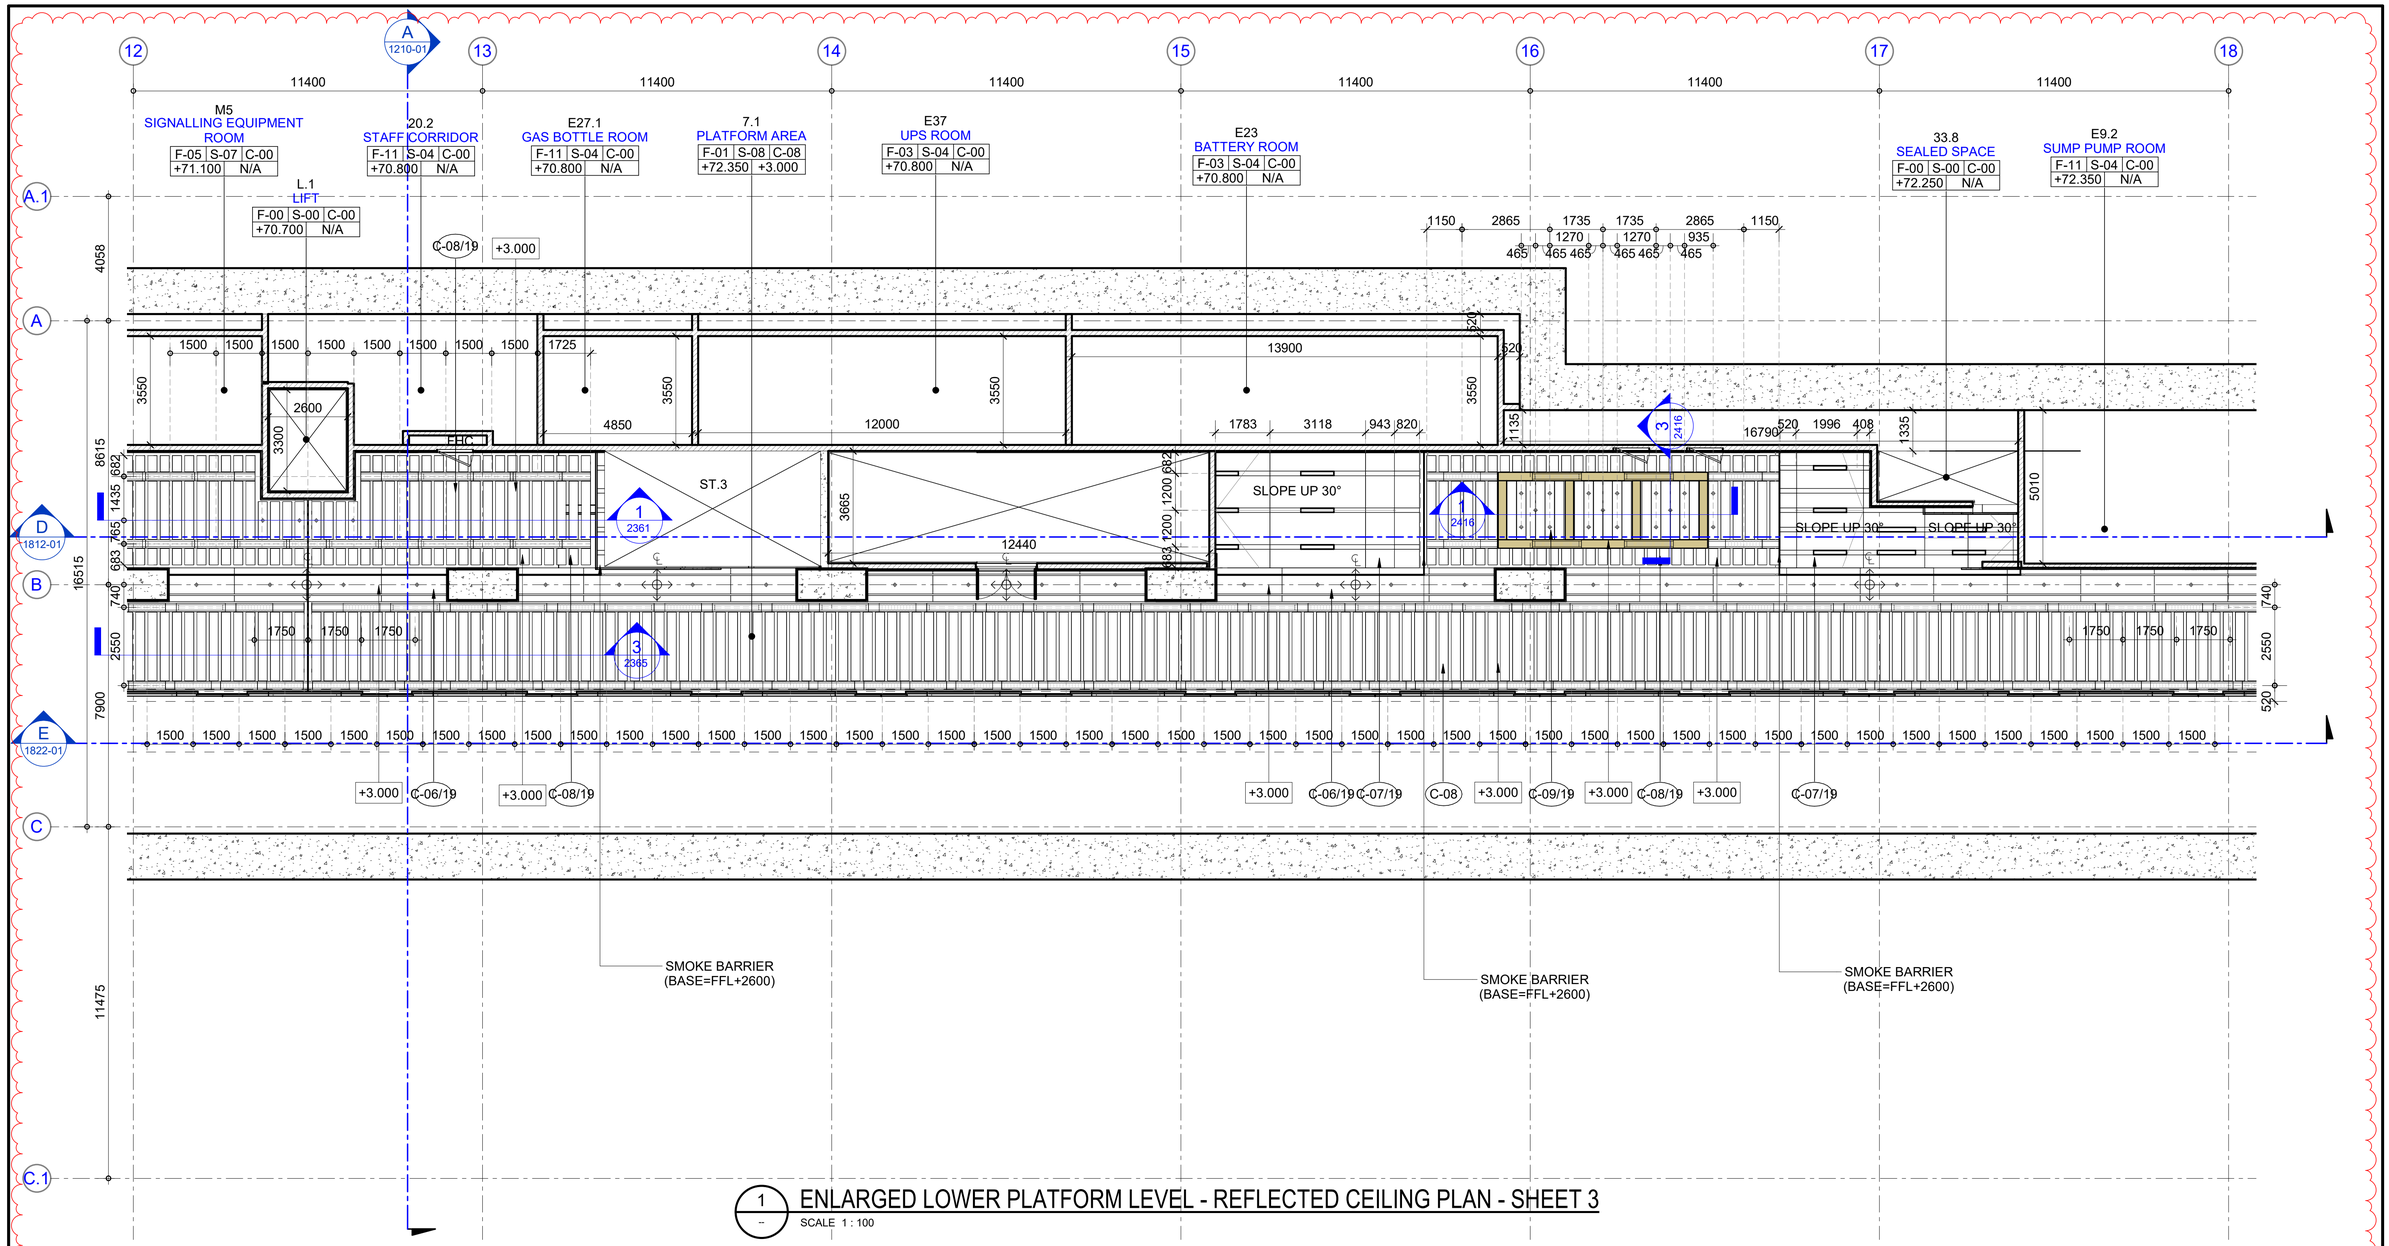

1 ENLARGED LOWER PLATFORM LEVEL - REFLECTED CEILING PLAN - SHEET 3

SCALE 1 : 100

NOTES :

1. ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2. LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3. DRAWING TO SCALE WHEN PLOTTED AT A1
4. DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5. ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E&M DRAWINGS, CONTRACT DOCUMENTS AND SPECIFICATIONS
6. FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7. DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
8. BLOCKWORK WALLS/ LIGHT WEIGHT CONCRETE PANEL (LPC) WALL TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN
9. FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
10. TO BE READ IN CONJUNCTION WITH SUBM. NO. 1-PROJ-AR-2311-1 & GRAPHIC DESIGN PACKAGE.

LEGENDS :

FLOOR FINISH NUMBER — ROOM NUMBER — ROOM NAME — CEILING TYPE — SKIRTING TYPE — CEILING HEIGHT FROM FFL — FINISHED FLOOR LEVEL

F-00 S-00 C-00
+00.000 +0.000

REFER TO 'OPERATION ROOMS' DETAIL DWG. NO. 1-PP19-AR-5XXX-1

X PP19-AR-XXXX-01 REFER TO SUBM. NO. 1-PP19-AR-XXXX-1

X XXXX REFER TO SUBM. NO. 1-PROJ-AR-2311-1 & 1-PROJ-AR-2321-1

FINISHES CODE :

CEILINGS

C-00 NO CEILING, EXPOSED CONCRETE
C-01 NO CEILING, ACRYLIC INTERIOR PAINT
C-02 600X600 SOLID ALUMN CEILING PANEL
C-03 600X600 PERFORATED ALUMN CEILING PANEL
C-04 (ADIT) & C-05 (PSD) & C-08 (CONCOURSE/ PLATFORM) 300MM (W) PARTIAL PERFORATED ALUMN CEILING PLANK WITH ACOUSTIC NON-WOVEN BACKING [MIN. 25% FREE AREA] C/W 200MM (W) ALUMN CEILING RUNNER
C-06 SOLID ALUMN CEILING PANEL
C-07 1200MM (W) SOLID ALUMN CEILING PANEL
C-09 300MM (W) SOLID ALUMN CEILING PANEL C/W ALUMN GRID RUNNER
C-10 FEATURE CEILING : 300MM (W) SOLID ALUMN CEILING PANEL WITH PRINTED PATTERN C/W STEPPING CEILING ON 4-SIDE
C-11 1500 MM (W) SOLID ALUMN CEILING PANEL

NOTES:
1. ALL ALUMN WORKS TO BE IN POWDER COATING FINISH, OTHERWISE STATED.

CEILING FINISHES :

- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- SOLID ALUMN CEILING
- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- 300MM (W) ALUMN CEILING WITH PRINTED GRAPHIC
- SOLID ALUMN CEILING
- SOLID ALUMN GRID RUNNERS
- SOLID ALUMN TRIMMING / STEPPING ALUMN CEILING


LEGENDS FOR E&M FIXTURES:

- RECESSED DOWNLIGHT
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ DISFUSSER
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ LOUVRE
- 300x600 DB. RECESSED FLUORESCENT W/ LOUVRE
- RECESSED WALL MOUNT LIGHT
- SURFACED WALL MOUNT LIGHT [L1: ROUND SHAPE, L2: SQUARE SHAPE]
- 1200x600 & 600x600 RETURN AIR GRILLE
- 600x600 SUPPLY AIR DIFFUSER
- SMOKE / HEAT DETECTOR
- SPRINKLER HEAD
- LAMP POST
- LAMP POST
- LED STRIP LIGHT
- 1200x200MM SUPPLY / RETURN AIR DIFFUSER

NOTES:
1. ALL ALUMN CEILING RUNNER TO BE IN 'DARK GREY' COLOUR

GRAPHIC SCALE 0 1 2 5 10 M. — 1:100

KEY PLAN

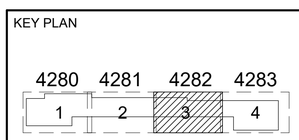

B

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :

THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMSCS1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE

DESIGNER: AECOM

DESIGNER		OYT						
DESIGN CHECKED		AJT						
PROJECT MANAGER		LCC	B	24-01-25	CRD UPDATED	LCC	OYT	AJT
			A	19-04-24	CRD	LCC	OYT	AJT
			REV.	DATE	REVISIONS	DWG.	CHK.	APP.

PURPLE LINE PROJECT

CONTRACT 1: UNDERGROUND CIVIL WORKS

SCALE : A1 = 1:100, A3 = 1:200


UNITS : mm.

DATE : 19-04-2024

PP19 : VAJIRA HOSPITAL STATION
LOWER PLATFORM LEVEL - REFLECTED CEILING PLAN
SHEET 3

STATUS :	DRAWING NO.	REVISION :	SHEET NO.
C	1-PP19-AR-4282-01	B	

1/24/2025 11:33:16 AM Autodesk Docs://Purple Line Extension/PPL-C-DPAR-1-PP19-AR-M3-0001.rvt

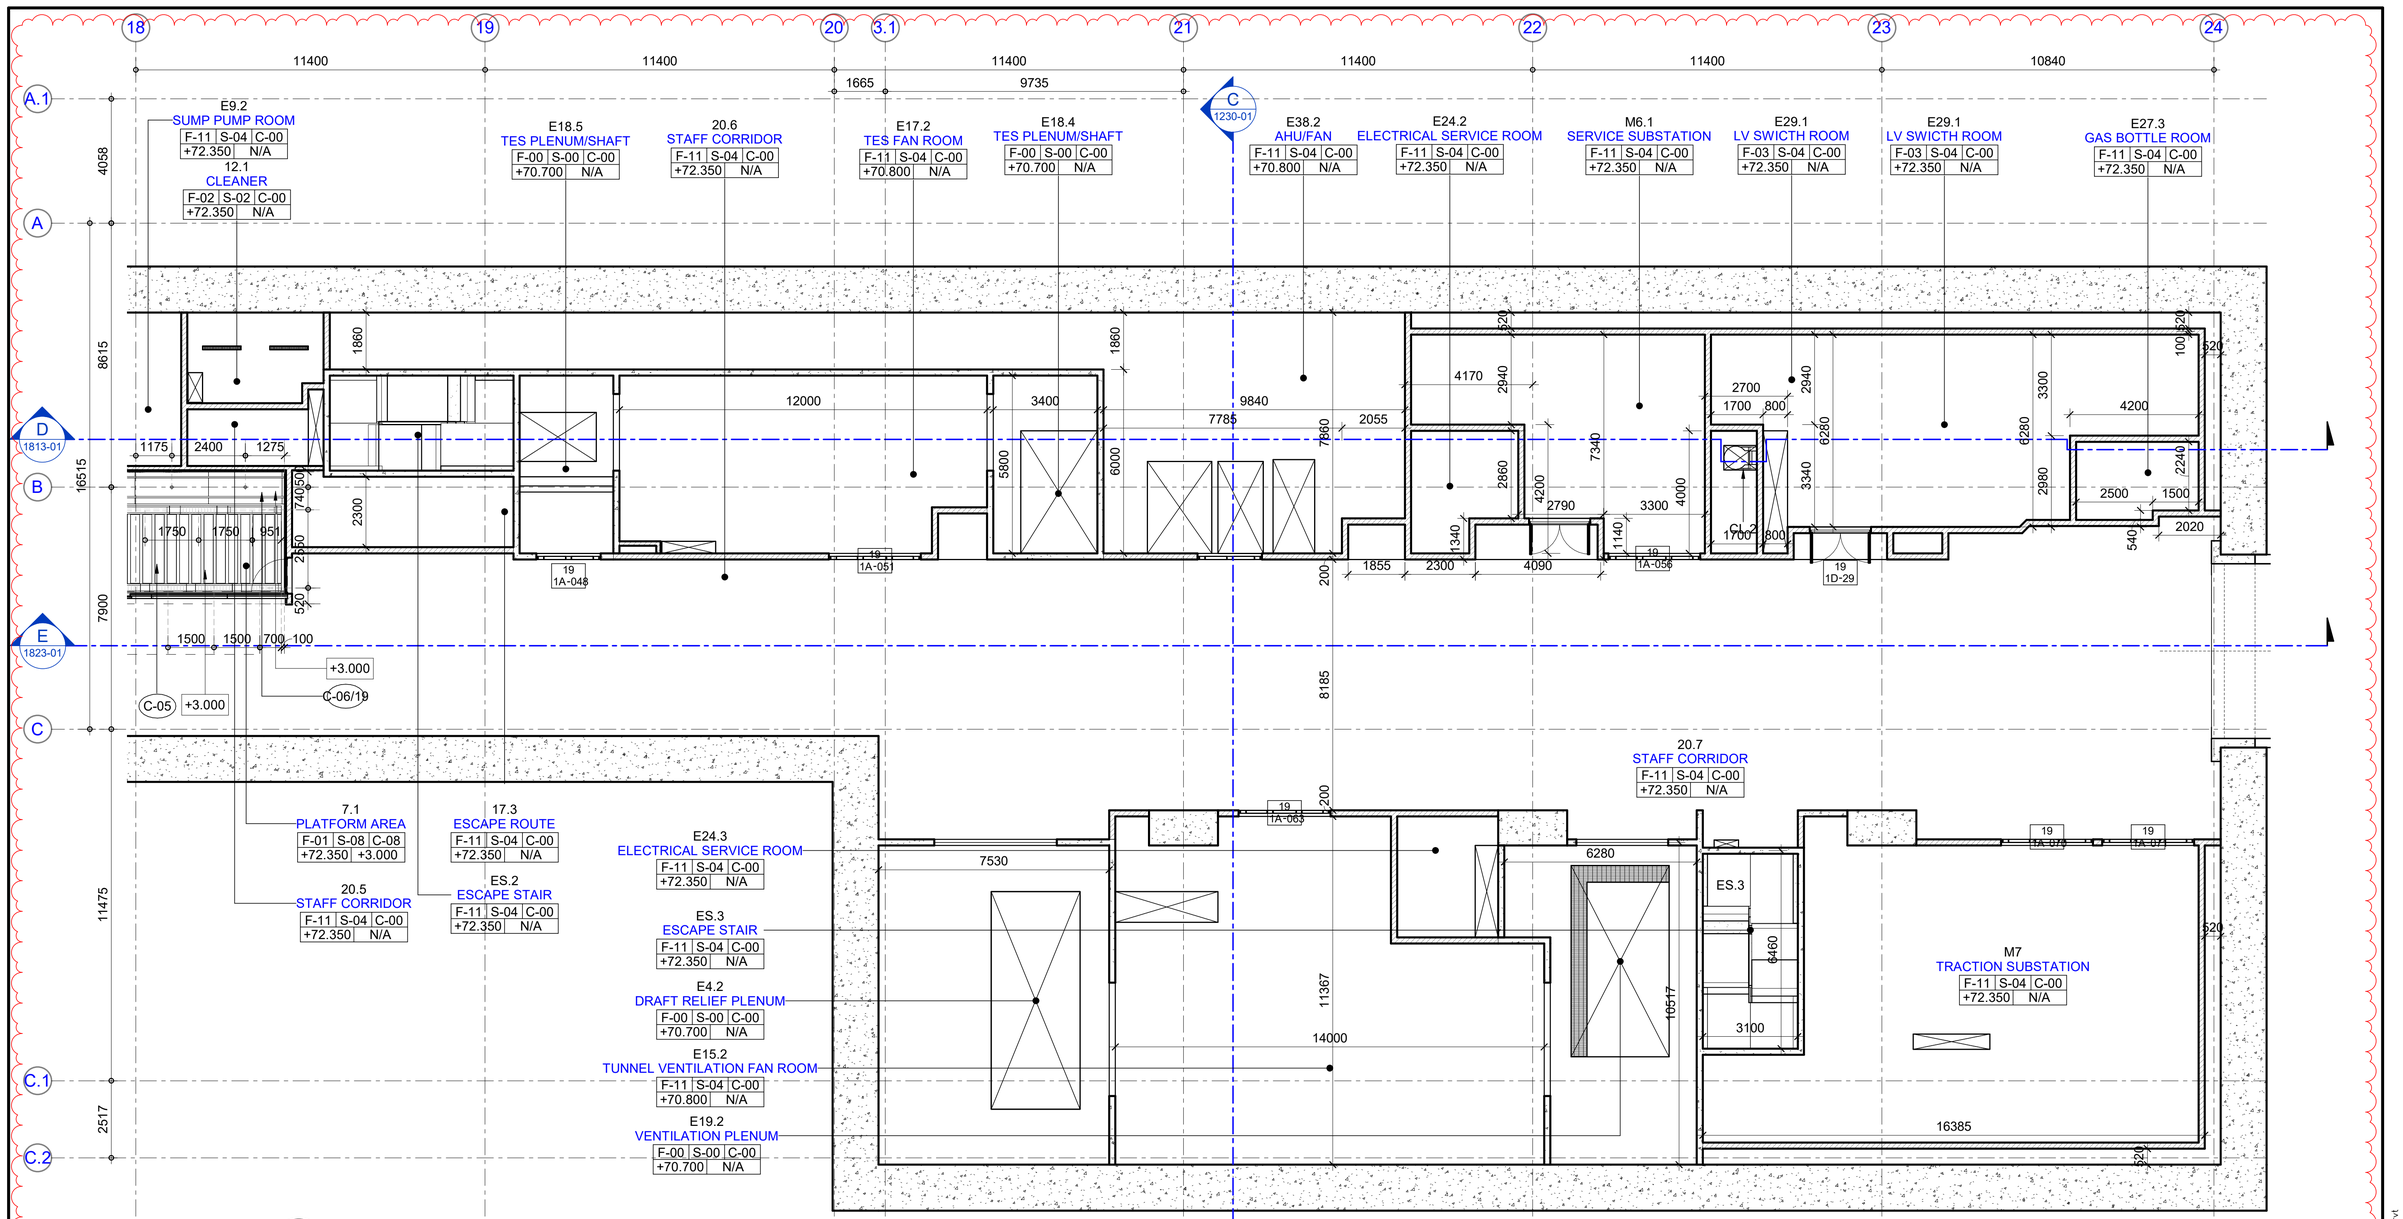

1 – ENLARGED LOWER PLATFORM LEVEL - REFLECTED CEILING PLAN - SHEET 4

SCALE 1 : 100

NOTES :

1. ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2. LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3. DRAWING TO SCALE WHEN PLOTTED AT A1
4. DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5. ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E&M DRAWINGS, CONTRACT DOCUMENTS AND SPECIFICATIONS
6. FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7. DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
8. BLOCKWORK WALLS/ LIGHT WEIGHT CONCRETE PANEL (LPC) WALL TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN
9. FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
10. TO BE READ IN CONJUNCTION WITH SUBM. NO. 1-PROJ-AR-2311-1 & GRAPHIC DESIGN PACKAGE.

LEGENDS :

FLOOR FINISH LEVEL — ROOM NUMBER / ROOM NAME — CEILING TYPE — SKIRTING TYPE — CEILING HEIGHT FROM FFL

F-00 S-00 C-00 +00.000 +0.000

REFER TO 'OPERATION ROOMS' DETAIL DWG. NO. 1-PP19-AR-5XXX-1

X PP19-AR-XXXX-01 — REFER TO SUBM. NO. 1-PP19-AR-XXXX-1

X XXXX — REFER TO SUBM. NO. 1-PROJ-AR-2311-1 & 1-PROJ-AR-2321-1

FINISHES CODE :

CEILINGS

- **C-00** NO CEILING, EXPOSED CONCRETE
- **C-01** NO CEILING, ACRYLIC INTERIOR PAINT
- **C-02** 600X600 SOLID ALUMN CEILING PANEL
- **C-03** 600X600 PERFORATED ALUMN CEILING PANEL
- **C-04** (ADIT) & C-05 (PSD) & C-08 (CONCOURSE/ PLATFORM) 300MM (W) PARTIAL PERFORATED ALUMN CEILING PLANK WITH ACOUSTIC NON-WOVEN BACKING [MIN. 25% FREE AREA] C/W 200MM (W) ALUMN CEILING RUNNER
- **C-06** SOLID ALUMN CEILING PANEL
- **C-07** 1200MM (W) SOLID ALUMN CEILING PANEL
- **C-09** 300MM (W) SOLID ALUMN CEILING PANEL C/W ALUMN GRID RUNNER
- **C-10** FEATURE CEILING : 300MM (W) SOLID ALUMN CEILING PANEL WITH PRINTED PATTERN C/W STEPPING CEILING ON 4-SIDE
- **C-11** 1500 MM (W) SOLID ALUMN CEILING PANEL

NOTES:
1. ALL ALUMN WORKS TO BE IN POWDER COATING FINISH, OTHERWISE STATED.

CEILING FINISHES :

- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- SOLID ALUMN CEILING
- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- 300MM (W) ALUMN CEILING WITH PRINTED GRAPHIC
- SOLID ALUMN CEILING
- SOLID ALUMN GRID RUNNERS
- SOLID ALUMN TRIMMING / STEPPING ALUMN CEILING

LEGENDS FOR E&M FIXTURES:


- RECESSED DOWNLIGHT
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ DISFUSSER
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ LOUVRE
- 300x600 DB. RECESSED FLUORESCENT W/ LOUVRE
- RECESSED WALL MOUNT LIGHT
- SURFACED WALL MOUNT LIGHT [L1: ROUND SHAPE, L2: SQUARE SHAPE] (L1)
- 1200x600 & 600x600 RETURN AIR GRILLE
- 600x600 SUPPLY AIR DIFFUSER
- SMOKE / HEAT DETECTOR
- SPRINKLER HEAD
- LAMP POST
- LAMP POST
- LED STRIP LIGHT
- 1200x200MM SUPPLY / RETURN AIR DIFFUSER

NOTES:
1. ALL ALUMN CEILING RUNNER TO BE IN 'DARK GREY' COLOUR

B

GRAPHIC SCALE 0 1 2 5 10 M. — 1:100

KEY PLAN



KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
PMCSC1
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMCSC1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE
STECON
DESIGNER: AECOM
TEAM Consulting Engineering and Management Co.,Ltd.
GFE The Geotechnical Expert
SEA-CONSULT ENGINEERING CO.,LTD.

DESIGNER	OYT							
DESIGN CHECKED	AJT							
PROJECT MANAGER	LCC	B	24-01-25	CRD UPDATED	LCC	OYT	AJT	
		A	19-04-24	CRD	LCC	OYT	AJT	
		REV.	DATE	REVISIONS	DWG.	CHK.	APP.	

PURPLE LINE PROJECT

CONTRACT 1: UNDERGROUND CIVIL WORKS

SCALE : A1 = 1:100, A3 = 1:200
UNITS : mm.
DATE : 19-04-2024

PP19 : VAJIRA HOSPITAL STATION
LOWER PLATFORM LEVEL - REFLECTED CEILING PLAN
SHEET 4

STATUS : C
DRAWING NO. 1-PP19-AR-4283-01
REVISION : B
SHEET NO.

1/24/2025 11:33:36 AM Autodesk Docs://Purple Line Extension/PPL-C-DPAR-1-PP19-AR-M3-0001.rvt