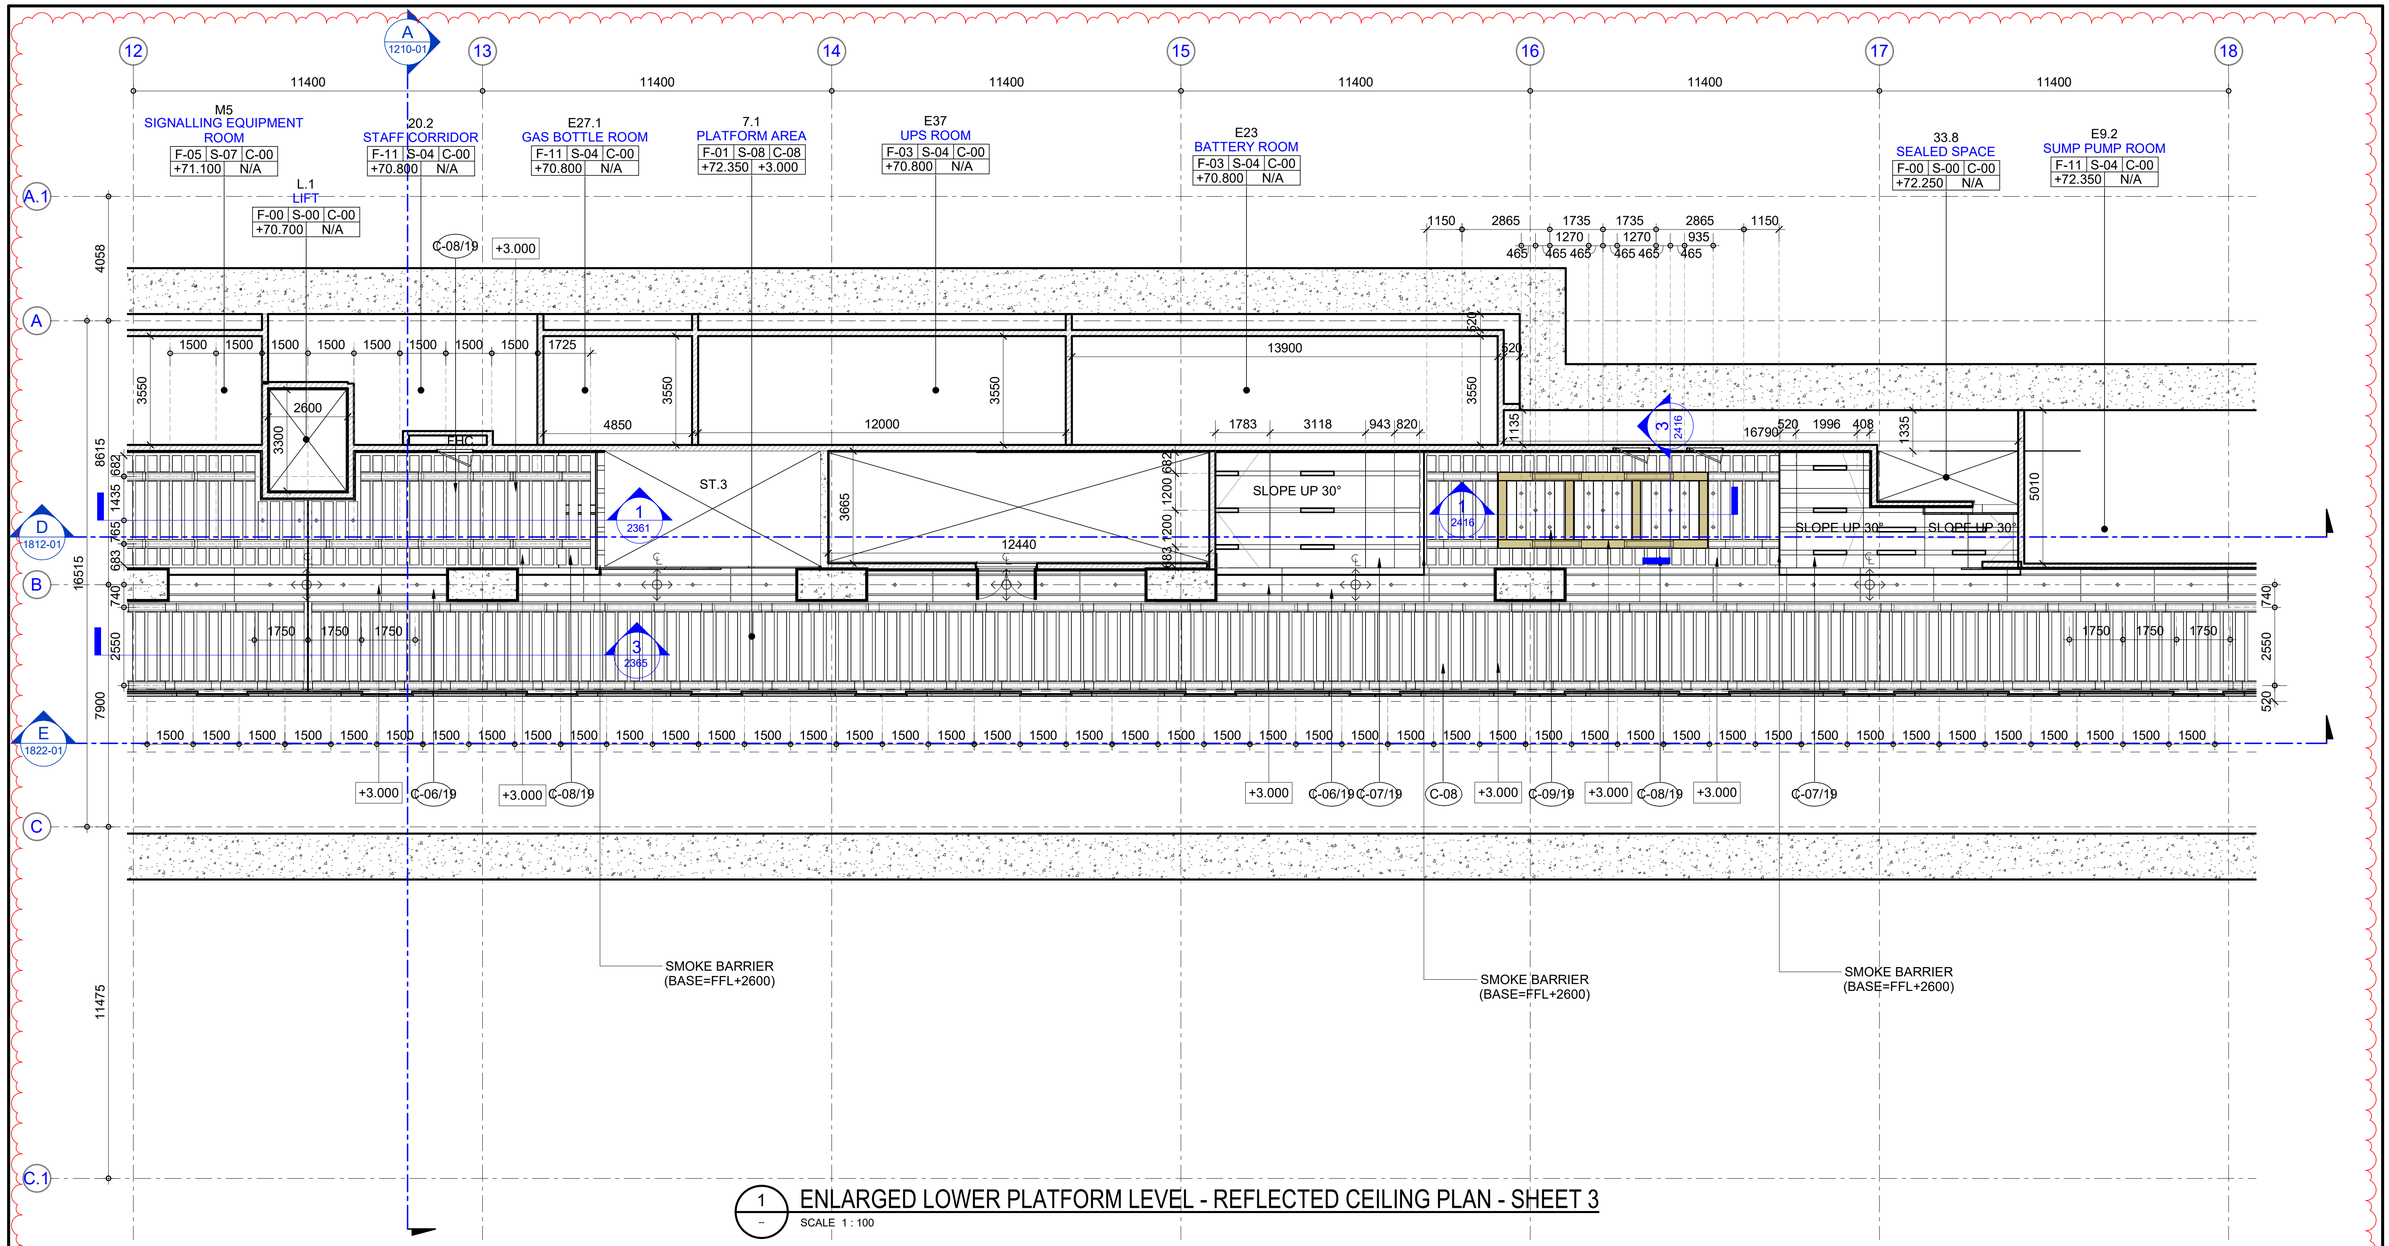



# 1 ENLARGED LOWER PLATFORM LEVEL - REFLECTED CEILING PLAN - SHEET 3

SCALE 1 : 100

## NOTES :

1. ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2. LEVELS ARE INDICATED IN METRES RELATIVE TO A DATUM 100M BELOW MEAN SEA LEVEL (MSL)
3. DRAWING TO SCALE WHEN PLOTTED AT A1
4. DO NOT SCALE FROM DRAWINGS, ALL DIMENSIONS TO BE CHECKED ON SITE
5. ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH STRUCTURAL DRAWINGS, E&M DRAWINGS, CONTRACT DOCUMENTS AND SPECIFICATIONS
6. FOR STRUCTURAL SETTING OUT DIMENSIONS REFER STRUCTURAL DRAWINGS
7. DIMENSIONS SHOWN IN GENERAL ARRANGEMENT DRAWINGS EXCLUDE FINISHES
8. BLOCKWORK WALLS/ LIGHT WEIGHT CONCRETE PANEL (LPC) WALL TO BE IN ACCORDANCE WITH THE SECONDARY STRUCTURAL DESIGN
9. FOR ROOM FINISHES REFER ARCHITECTURAL PARTICULAR SPECIFICATIONS AND FINISHES SCHEDULE
10. TO BE READ IN CONJUNCTION WITH SUBM. NO. 1-PROJ-AR-2311-1 & GRAPHIC DESIGN PACKAGE.

## LEGENDS :

FLOOR FINISH NUMBER — ROOM NUMBER — ROOM NAME — CEILING TYPE — SKIRTING TYPE — CEILING HEIGHT FROM FFL — FINISHED FLOOR LEVEL

F-00 S-00 C-00
+00.000 +0.000

REFER TO 'OPERATION ROOMS' DETAIL DWG. NO. 1-PP19-AR-5XXX-1

X PP19-AR-XXXX-01 REFER TO SUBM. NO. 1-PP19-AR-XXXX-1

X XXXX REFER TO SUBM. NO. 1-PROJ-AR-2311-1 & 1-PROJ-AR-2321-1

## FINISHES CODE :

CEILINGS

**C-00** NO CEILING, EXPOSED CONCRETE
**C-01** NO CEILING, ACRYLIC INTERIOR PAINT
**C-02** 600X600 SOLID ALUMN CEILING PANEL
**C-03** 600X600 PERFORATED ALUMN CEILING PANEL
**C-04** (ADIT) & C-05 (PSD) & C-08 (CONCOURSE/ PLATFORM) 300MM (W) PARTIAL PERFORATED ALUMN CEILING PLANK WITH ACOUSTIC NON-WOVEN BACKING [MIN. 25% FREE AREA] C/W 200MM (W) ALUMN CEILING RUNNER
**C-06** SOLID ALUMN CEILING PANEL
**C-07** 1200MM (W) SOLID ALUMN CEILING PANEL
**C-09** 300MM (W) SOLID ALUMN CEILING PANEL C/W ALUMN GRID RUNNER
**C-10** FEATURE CEILING : 300MM (W) SOLID ALUMN CEILING PANEL WITH PRINTED PATTERN C/W STEPPING CEILING ON 4-SIDE
**C-11** 1500 MM (W) SOLID ALUMN CEILING PANEL

NOTES:
1. ALL ALUMN WORKS TO BE IN POWDER COATING FINISH, OTHERWISE STATED.

## CEILING FINISHES :

- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- SOLID ALUMN CEILING
- 300MM (W) PARTIAL PERFORATED ALUMN CEILING
- 300MM (W) ALUMN CEILING WITH PRINTED GRAPHIC
- SOLID ALUMN CEILING
- SOLID ALUMN GRID RUNNERS
- SOLID ALUMN TRIMMING / STEPPING ALUMN CEILING


## LEGENDS FOR E&M FIXTURES:

- RECESSED DOWNLIGHT
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ DISFUSSER
- 1257(L) SG. / DB. RECESSED FLUORESCENT W/ LOUVRE
- 300x600 DB. RECESSED FLUORESCENT W/ LOUVRE
- RECESSED WALL MOUNT LIGHT
- SURFACED WALL MOUNT LIGHT [L1: ROUND SHAPE, L2: SQUARE SHAPE]
- 1200x600 & 600x600 RETURN AIR GRILLE
- 600x600 SUPPLY AIR DIFFUSER
- SMOKE / HEAT DETECTOR
- SPRINKLER HEAD
- LAMP POST
- LAMP POST
- LED STRIP LIGHT
- 1200x200MM SUPPLY / RETURN AIR DIFFUSER

NOTES:
1. ALL ALUMN CEILING RUNNER TO BE IN 'DARK GREY' COLOUR

0 1 2 5 10 M.
GRAPHIC SCALE 1:100

KEY PLAN

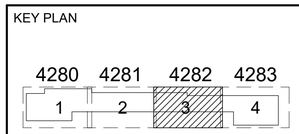


B

KINGDOM OF THAILAND
MINISTRY OF TRANSPORT
MASS RAPID TRANSIT AUTHORITY OF THAILAND

EMPLOYER'S REPRESENTATIVE :
THE PROJECT MANAGEMENT AND CONSTRUCTION SUPERVISION CONSULTANT 1 (PMSCS1)
FOR THE MRT PURPLE LINE PROJECT
TAO PUN - RAT BURANA (KANCHANAPISEK ROAD) SECTION

CONTRACTOR : CKST-PL JOINT VENTURE
DESIGNER: AECOM, TEAM Consulting Engineering and Management Co.,Ltd., GFE The Geotechnical Expert

| | | |
|---|---|---|
| DESIGNER | | OYT |
| DESIGN CHECKED | | AJT |
| PROJECT MANAGER | | LCC |

| REV. | DATE | REVISIONS | DWG. | CHK. | APP. |
|---|---|---|---|---|---|
| B | 24-01-25 | CRD UPDATED | LCC | OYT | AJT |
| A | 19-04-24 | CRD | LCC | OYT | AJT |

PURPLE LINE PROJECT
CONTRACT 1: UNDERGROUND CIVIL WORKS

SCALE : A1 = 1:100, A3 = 1:200
UNITS : mm.
DATE : 19-04-2024

PP19 : VAJIRA HOSPITAL STATION
LOWER PLATFORM LEVEL - REFLECTED CEILING PLAN
SHEET 3

| STATUS : | DRAWING NO. | REVISION : | SHEET NO. |
|---|---|---|---|
| C | 1-PP19-AR-4282-01 | B | |

1/24/2025 11:33:16 AM Autodesk Docs://Purple Line Extension/PPL-C-DPAR-1-PP19-AR-M3-0001.rvt